




dile.

Round. Small. Catchy.

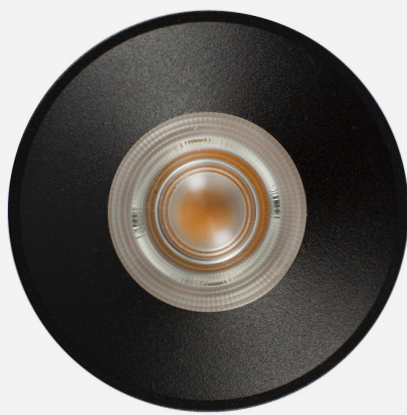

psmlighting

Delighted to help you

All information in this catalogue is without engagement.

Psmlighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.

Read instructions carefully. The general psmlighting sales conditions are always applicable.

Nothing in this catalogue can be reproduced without permission in writing from the psmlighting bv company.

2941.DICRO.S1/.. - ODILE

~12V



S1

IP55



0.1900

0,5 m



downlight - round - fixed - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 8W

Dimensions

↔ Ø90xH75 mm

🔧 Ø70 mm

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

2941.DICRO.S1.31MA



2941.DICRO.S1.32A



2941.DICRO.S1.46A



2941.DICRO.S1.64A



Price €

semi built-in/up

2941.DICRO.S2/.. - ODILE

~12V



S2

IP55



0,5 m



downlight - round - fixed - without transformer

Lamptype

1x QR-CB 51 GU5,3/GX5,3 max. 8W

Dimensions

↔ Ø90xH75 mm

🔧 Ø70 mm

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

2941.DICRO.S2.31MA



2941.DICRO.S2.32A



2941.DICRO.S2.46A



2941.DICRO.S2.64A



Price €

semi built-in/up

2941.ES50.S1/.. - ODILE

~230V



S1

IP55



0.2000

0,5 m



downlight - round - fixed

Lamptype

1x QPAR 51 GU10 max. 8W

Dimensions

↔ Ø90xH75 mm

🔧 Ø70 mm

⊥ 75 mm

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

2941.ES50.S1.31MA



2941.ES50.S1.32A



2941.ES50.S1.46A



2941.ES50.S1.64A



Price €

semi built-in/up

2941.ES50.S2/.. - ODILE

~230V



S2

IP55



0.2000

0,5 m



downlight - round - fixed

Lamptype

1x QPAR 51 GU10 max. 8W

Dimensions

↔ Ø90xH75 mm

🔧 Ø70 mm

⊥ 75 mm

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

2941.ES50.S2.31MA



2941.ES50.S2.32A



2941.ES50.S2.46A



2941.ES50.S2.64A



Price €

semi built-in/up

2941.AC.S1/.. - ODILE

~230V



downlight - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W



Dimensions

Ø90xH100 mm

Ø70 mm

100 mm

36°

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

Price €

2941.AC.S1.31MA	● NW WW
2941.AC.S1.32A	● NW WW
2941.AC.S1.46A	● NW WW
2941.AC.S1.64A	● NW WW

semi built-in/up

2941.AC.S2/.. - ODILE

~230V



downlight - round - fixed - down

Lamptype

1x LED 700lm CRI92 max. 9,5W



Dimensions

Ø90xH100 mm

Ø70 mm

100 mm

36°

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

Price €

2941.AC.S2.31MA	● NW WW
2941.AC.S2.32A	● NW WW
2941.AC.S2.46A	● NW WW
2941.AC.S2.64A	● NW WW

semi built-in/up



2941.ZXO.S1/.. - ODILE

~230V



downlight - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W

Dimensions

Ø90xH90 mm

Ø70 mm

90 mm

30°

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

Price €

2941.ZXO.S1.31MA	● NW WW
2941.ZXO.S1.32A	● NW WW
2941.ZXO.S1.46A	● NW WW
2941.ZXO.S1.64A	● NW WW

semi built-in/up
Suitable for showers

2941.ZXO.S2/.. - ODILE

~230V



downlight - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W

Dimensions

Ø90xH90 mm

Ø70 mm

90 mm

30°

Materials

Alu Anodisé


31MA | 32A | 46A | 64A

Ref

Price €

2941.ZXO.S2.31MA	● NW WW
2941.ZXO.S2.32A	● NW WW
2941.ZXO.S2.46A	● NW WW
2941.ZXO.S2.64A	● NW WW

semi built-in/up
Suitable for showers

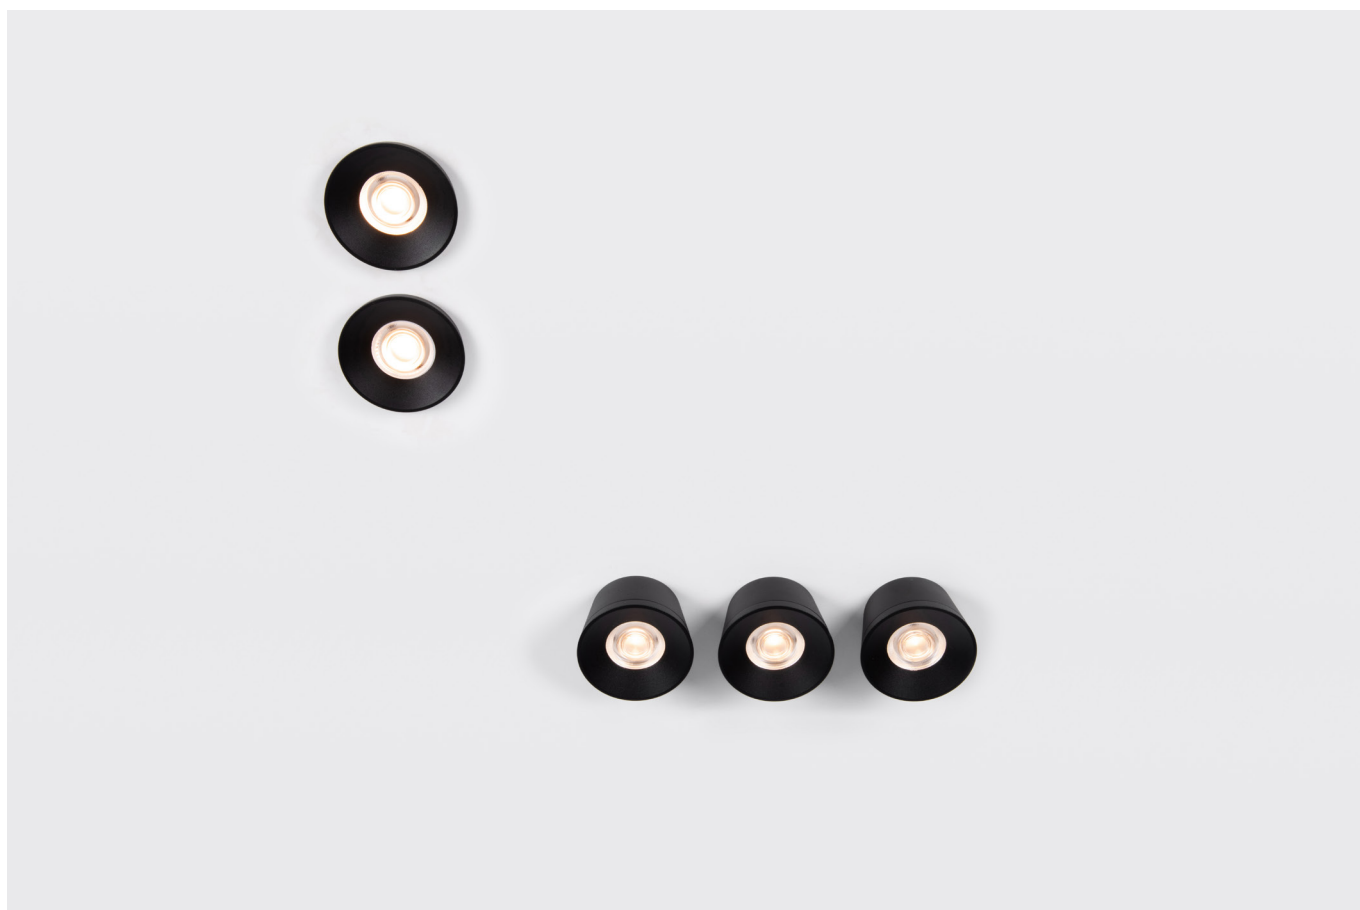

2942.ZXO/.. - ODILE INDOOR - OUTDOOR

~230V



built-up ceiling light - round - fixed - down

Lamptype

1x LED 860lm CRI90 max. 10W

Dimensions

↔ Ø90xH56 mm

∧ 30°

Materials

Alu Anodisé

31MA | 32A | 46A | 64A

Ref

2942.ZXO.31MA

● NW | WW

2942.ZXO.32A

● NW | WW

2942.ZXO.46A

● NW | WW

2942.ZXO.64A


● NW | WW

Price €

built-up
Suitable for showers

2943/.. - ODILE INDOOR

~230V

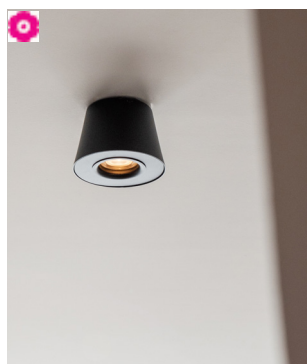

built-up ceiling light - round - fixed - with LED driver

Lamptype

1x LED 860lm CRI90 max. 10W

Dimensions

↔ Ø150xH112,5 mm

∧ 30°

Materials

Aluminium

1M | 2M

Ref

2943.1M


● NW | WW

2943.2M

● NW | WW

Price €

built-up



Ral colors on request.



psmlighting

Delighted to help you

Groendreef 60, 9880 Aalter | T +32 9 374 19 51 | www.psmlighting.be

All our products are locally made in Aalter, Belgium (EU). Short delivery times.