

INDOOR LEDMODULES

INDOOR LEDMODULES

230V

350-1050MA

24V-DC

∅

∅29 ZIA MINI	45
∅38 ZITA	45
∅38-39 ZITA	46
∅39-40 ZITA	46
∅40 STELLA	39
∅40 FELIX	53-55
∅40 ZIA LED M	57-58
∅40 OBELIX	29-31
∅45 ZIA LED F 230V	4
∅48 ZIA LED 230V	5
∅48 ZITA	48
∅48 ZIALED	59
∅49 FOCUS	52
∅60 ARCA	51
∅60 CESAR	60-68
∅60 KASTAR	32-35
∅65 SLO	69-71
∅65 VARIO	71
∅65 OLIVIA XTM	134
∅68 CATWALK	6
∅70 NORA AC	7-8
∅70 CITY	19-20
∅70 NORA DC1200	76-77
∅70 NORA DC700	81-82
∅70 NOVA FLAT	86-87
∅70 NOVA	91-92
∅70 NOVA SOFT	96-97
∅70 LUXOR XTM	112-116
∅72 FLUX	145
∅80 NORA AC	9-11
∅80 NORA DC1200	78-79
∅80 NORA DC700	83-85
∅80 NOVA FLAT	88-90
∅80 NOVA	93-95
∅80 NOVA SOFT	98-100

#

∅80 KOZA	12
∅80 KOZA X XTM	136
∅80 FLOU	13
∅80 FLOU XTM	110
∅80 CAMELEON	14-17
∅80 CAMELEON XT	106-109
∅80 PIVOT	73-75
∅80 LUXOR XTM	117-124
∅82 MANTA	18
∅80 CITY	21-22
∅82 FLUX XTM	145
∅92 FLUX XTM	147
∅100 CITY	23
∅100 LUXOR XTM	125-126
∅110 LUXOR XTM	126-132
∅118 INCA XTM	137
∅120 PIVOT	105
∅122 CITY	23
∅122 INCA XTM	138
∅122 LUXOR XTM	134
∅135 CITY	23
∅135 INCA XTM	138
∅135 LUXOR XTM	134
∅137 FLUX XTM	147
∅162 INCA XTM	138
∅162 OLIVIA XTM	134
∅164 KOZA X	139-141

#40X40 STELLA	37
#54X54 STELLA	37-39
#105X105 STELLA	43
#124X124 CITY	24/142
#145X145 SNOWBOX	25
#152X152 CITY	24/25/143
#160X160 SNOWBOX	25
#200X200	25/27
#220X220 SNOWBOX	25
#220X220 QUADRO	27
#303X303 LUXOR	143
#64X36 STELLA	37-39
#175X41,5	40/42
#222X41,5	41-43
#229X124 LUXOR	24/142
#235X145 SNOWBOX	25
#275X165 SNOWBOX	26
#298X152 LUXOR	24/143
#339X124 LUXOR	142
#390X220 SNOWBOX	26
#453X152 LUXOR	143
#246X246 LUXOR	142

Index

A

ARCA.SLO/.. 52

C

CAMELEON 14-17

CAMELEON XTM 106-109

CANO.SLO/.. 70

CATWALK 6

CESAR 60-68

CITY 19-24

D

DIVA.SLO/.. 70

F

FELIX 53-55

FLOU 13

FLOU XTM 110

FLUX INOX 316 Ø72 145

FLUX INOX 316 Ø82 145

FLUX INOX 316 Ø92 147

FLUX INOX 316 Ø137 147

FOCUS.SLO/.. 52

K

KASTAR 30-35

KOZA 12

KOZA X Ø80 136

KOZA X Ø118 137

KOZA X Ø164 139-141

L

LUXOR 142

LUXOR- INCA 138-139

LUXOR- SPINNER 143

LUXOR Ø2X130 133

LUXOR Ø70 112-116

LUXOR Ø80 117-127

LUXOR Ø100 125-132

LUXOR Ø122 132

LUXOR Ø135 132

M

MANTA IN 18

N

NORA AC 7-11

NORA DC 76-85

NOVA FLAT LED 86-90

NOVA LED 91-95

NOVA SOFT 96-100

O

OBELIX 29-31

OLIVIA XTM 134

P

PICO.SLO/.. 69

PIVOT 73-75

PIVOT XTM 105

Q

QUADRO 27

S

SIRA.SLO/.. 70

SNOWBOX LED 25-26

STELLA IN 37-44

V

VARIO.SLO/.. 71

Z

ZIALED/.. 59

ZIALED.230V/.. 5-59

ZIALEDF230V/.. 4

ZIALEDM/.. 57-58

ZIAMINILED/.. 45

ZITA35/.. 46-48

ZIALEDF230V.S1/.. - Ø45 ZIA LED 230V

~230V S1 LED C IP44 0,1400 0,5 m 05.20.50 CE



built-in ceiling and wall light - round - fixed - with led
Decken- und Wandleuchte für Einbau - rund - fest - mit Led

Lamp type
1x Led 230lm CRI80 max. 4W **A+** 230V

Dimensions
Ø54xH55 30° reflector
Ø45 65

Options
S6.45 - PLASTERKIT

Ref cat (STD)

ZIALEDF230V.S1.1MA	NW WW
ZIALEDF230V.S1.2MA	NW WW
ZIALEDF230V.S1.11MA	NW WW
ZIALEDF230V.S1.14	NW WW

built-in
Color 14 not suitable for moist places
Farbe 14 nicht für feuchten Umgebung

ZIALEDF230V.S2/.. - Ø45 ZIA LED 230V

~230V S2 LED C IP44 0,1300 0,5 m 05.20.50 CE



built-in ceiling and wall light - round - with led
Decken- und Wandleuchte für Einbau - rund - mit Led

Lamp type
1x Led 230lm CRI80 max. 4W **A+** 230V

Dimensions
Ø54xH55 30° reflector
Ø45 65

Options
S6.45 - PLASTERKIT

Ref cat (STD)

ZIALEDF230V.S2.1MA	NW WW
ZIALEDF230V.S2.2MA	NW WW
ZIALEDF230V.S2.11MA	NW WW
ZIALEDF230V.S2.14	NW WW

built-in
Color 14 not suitable for moist places
Farbe 14 nicht für feuchten Umgebung

ZIALEDFC230V.S1/.. - Ø45 ZIA LED 230V

~230V S1 LED C IP44 0,1500 0,5 m 05.20.50 CE



built-in ceiling and wall light - square - with led
Decken- und Wandleuchte für Einbau - viereckig - mit Led

Lamp type
1x Led 230lm CRI80 max. 4W **A+** 230V

Dimensions
L54xB54xH56 30° reflector
Ø45 65

Options
S6.45 - PLASTERKIT

Ref cat (STD)

ZIALEDFC230V.S1.1MA	NW WW
ZIALEDFC230V.S1.2MA	NW WW
ZIALEDFC230V.S1.11MA	NW WW
ZIALEDFC230V.S1.14	NW WW

built-in
Color 14 not suitable for moist places
Farbe 14 nicht für feuchten Umgebung

ZIALEDFC230V.S2/.. - Ø45 ZIA LED 230V

~230V S2 LED C IP44 0,5 m 05.20.50 CE



built-in ceiling and wall light - square - with led
Decken- und Wandleuchte für Einbau - viereckig - mit Led

Lamp type
1x Led 230lm CRI80 max. 4W **A+** 230V

Dimensions
L54xB54xH56 30° reflector
Ø45 65

Options
S6.45 - PLASTERKIT

Ref cat (STD)

ZIALEDFC230V.S2.1MA	NW WW
ZIALEDFC230V.S2.2MA	NW WW
ZIALEDFC230V.S2.11MA	NW WW
ZIALEDFC230V.S2.14	NW WW

built-in
Color 14 not suitable for moist places
Farbe 14 nicht für feuchten Umgebung

ZIALED.230V/.. - Ø48

~230V



S2



IP20



0,1100

0,5 m

05.20.50



built-in ceiling and wall light - round
Decken- und Wandleuchte für Einbau - rund

Lamp type

1x Led 400lm CRI80 max. 4W ▶ 230V

Dimensions

Ø58,5xH64

Ø48 JL 74

Options

S6.50 - PLASTERKIT

Ref cat (STD)

ZIALED.230V.1M	NW
ZIALED.230V.1MA	NW
ZIALED.230V.2M	NW
ZIALED.230V.2MA	NW
ZIALED.230V.11M	NW
ZIALED.230V.11MA	NW
ZIALED.230V.14	NW

*built-in
dimmable phase-cut
dimmbar Phasenabschnitt*



INDOOR | Ceiling IN | Ledmodules | CATWALK DOWNLIGHT

Downlight without exterior ring, with clamp and torsion springs - IP65 - LED colours: warm white (WW) natural white (NW) - other on request

Deckeneinbauleuchte ohne Außenring, mit Bügel und Torsionfedern - IP65 - LED Farben: warm Weiß (WW) naturell Weiß (NW) - andere auf Anfrage

1690.OP/.. - CATWALK

~230V



S1



IP65



built-in ceiling light - round - fixed - with opal plexi (OP)
Einbau Deckenleuchte - rund - fest - mit opalem Plexi (OP)

Lamptype

1x Led 230V max. 3,6W **A+** 230V

Dimensions

Ø80xH50

Ø68

Options

S2 - SET FLAT SPRINGS

Ref

1690.OP.WW

led warm white

1690.OP.NW

led natural white

built-in

flat springs on request

Blattfedern auf Anfrage

for elevators and bathrooms

für Aufzüge und Badezimmer

1691.OP/.. - CATWALK DOUCHE

=24V-DC



S1



IP65



built-in ceiling light - round - fixed - with opal plexi (OP) -
without transformer
Einbau Deckenleuchte - rund - fest - mit opalem Plexi (OP)
- ohne Trafo

Lamptype

1x Led 24V-DC max. 3,6W **A+** 24V-DC

Dimensions

Ø80xH50

Ø68

Options

S2 - SET FLAT SPRINGS

Ref

1691.OP.WW

led warm white

1691.OP.NW

led natural white

built-in








flat springs on request

Blattfedern auf Anfrage

for elevators - bathrooms - showers


für Aufzüge - Badezimmer - Duschen

AC.700.10024/.. - NORA AC

~230V       



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø80xH90  36° reflector
70  105





Options
S1 - SET TORSION SPRINGS

Ref cat (STD)

AC.700.10024.1	NW WW
AC.700.10024.1M	NW WW
AC.700.10024.2	NW WW
AC.700.10024.2M	NW WW
AC.700.10024.4	NW WW
AC.700.10024.11	NW WW
AC.700.10024.13	NW WW
AC.700.10024.14	NW WW
AC.700.10024.16	NW WW
AC.700.10024.21	NW WW
AC.700.10024.23	NW WW
AC.700.10024.45	NW WW


built-in


AC.700.10026/.. - NORA AC

~230V       



downlight - round - directional - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø80xH90  36° reflector
70  105








Options
S1 - SET TORSION SPRINGS

Ref cat (STD)

AC.700.10026.1	NW WW
AC.700.10026.1M	NW WW
AC.700.10026.2	NW WW
AC.700.10026.2M	NW WW
AC.700.10026.4	NW WW
AC.700.10026.11	NW WW
AC.700.10026.13	NW WW
AC.700.10026.14	NW WW
AC.700.10026.16	NW WW
AC.700.10026.21	NW WW
AC.700.10026.23	NW WW
AC.700.10026.45	NW WW


built-in



AC.700.10028/.. - NORA AC

~230V       



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø80xH115  36° reflector
70  130








Options
S1 - SET TORSION SPRINGS

Ref cat (STD)

AC.700.10028.1	NW WW
AC.700.10028.1M	NW WW
AC.700.10028.2	NW WW
AC.700.10028.2M	NW WW
AC.700.10028.4	NW WW
AC.700.10028.11	NW WW
AC.700.10028.13	NW WW
AC.700.10028.14	NW WW
AC.700.10028.16	NW WW
AC.700.10028.21	NW WW
AC.700.10028.23	NW WW
AC.700.10028.45	NW WW

built-in

AC.700.10025/.. - NORA AC

~230V   S2  IP20     





downlight - square - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens



Ref cat (STD)

AC.700.10025.1M	NW WW
AC.700.10025.2M	NW WW
AC.700.10025.14	NW WW

Lamp type

 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions

 L80xB80xH115  36° reflector









 70  130

Options

S1 - SET TORSION SPRINGS

built-in

AC.700.10027/.. - NORA AC

~230V   S2  IP20     





downlight - square - directional - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens



Ref cat (STD)

AC.700.10027.1M	NW WW
AC.700.10027.2M	NW WW
AC.700.10027.14	NW WW

Lamp type

 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions

 L80xB80xH115  36° reflector




 70  130

Options

S1 - SET TORSION SPRINGS

built-in

AC.700.10029/.. - NORA AC

~230V   S2  IP20     





downlight - square - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens



Ref cat (STD)

AC.700.10029.1M	NW WW
AC.700.10029.2M	NW WW
AC.700.10029.14	NW WW

Lamp type

 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions

 L80xB80xH115  36° reflector










 70  130


Options

S1 - SET TORSION SPRINGS

built-in

AC.700.10010/.. - NORA AC

~230V     IP20    0,3300  0,5 m  05.20.50 



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø89xH90  36° reflector
80  105

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
AC.700.10010.1	NW WW
AC.700.10010.1M	NW WW
AC.700.10010.2	NW WW
AC.700.10010.2M	NW WW
AC.700.10010.4	NW WW
AC.700.10010.11	NW WW
AC.700.10010.13	NW WW
AC.700.10010.14	NW WW
AC.700.10010.16	NW WW
AC.700.10010.21	NW WW
AC.700.10010.23	NW WW
AC.700.10010.45	NW WW


built-in



AC.700.10011/.. - NORA AC

~230V     IP20    0,2700  0,5 m  05.20.50 



downlight - round - directional - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V





Dimensions
Ø89xH95  36° reflector
80  110


Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
AC.700.10011.1	NW WW
AC.700.10011.1M	NW WW
AC.700.10011.2	NW WW
AC.700.10011.2M	NW WW
AC.700.10011.4	NW WW
AC.700.10011.11	NW WW
AC.700.10011.13	NW WW
AC.700.10011.14	NW WW
AC.700.10011.16	NW WW
AC.700.10011.21	NW WW
AC.700.10011.23	NW WW
AC.700.10011.45	NW WW


built-in



AC.700.10014/.. - NORA AC

~230V     IP20    0,5  05.20.50 



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø89xH100  36° reflector
80  115

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
AC.700.10014.1M	NW WW
AC.700.10014.2M	NW WW
AC.700.10014.14	NW WW


built-in



AC.700.10017/.. - NORA AC

~230V     IP20    0,5 m  05.20.50 



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Lamp type
1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
Ø89xH115  36° reflector
80  130

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
AC.700.10017.1M	NW WW
AC.700.10017.2M	NW WW
AC.700.10017.14	NW WW

built-in

AC.700.10016/.. - NORA AC

~230V S2 LED C IP20 0,5 m 05.20.50 CE



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)

AC.700.10016.1M	CW NW WW
AC.700.10016.2M	NW WW
AC.700.10016.14	NW WW

Lamp type

1x LED AC 700lm CRI92 max. 9,5W **A+** 230V

Dimensions

Ø87xH130 36° reflector

80 140

Options

S1 - SET TORSION SPRINGS



built-in

AC.700.10023/.. - NORA AC

~230V S2 LED C IP20 0,5 m 05.20.50 CE



downlight - round - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)

AC.700.10023.1MA	NW WW
AC.700.10023.2MA	NW WW
AC.700.10023.11MA	NW WW

Lamp type

1x LED AC 700lm CRI92 max. 9,5W **A+** 230V

Dimensions

Ø89xH110 36° reflector

80 125

Options





S1 - SET TORSION SPRINGS



built-in





AC.700.10012/.. - NORA AC





~230V   S2  IP20     



downlight - square - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)	
AC.700.10012.1M	NW WW
AC.700.10012.2M	NW WW
AC.700.10012.14	NW WW









Lamp type
 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
 L100xB100xH90  36° reflector
 80  105

Options
 S1 - SET TORSION SPRINGS

built-in



AC.700.10013/.. - NORA AC





~230V   S2  IP20     



downlight - square - directional - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)	
AC.700.10013.1M	NW WW
AC.700.10013.2M	NW WW
AC.700.10013.14	NW WW










Lamp type
 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
 L100xB100xH95  36° reflector
 80  110

Options
 S1 - SET TORSION SPRINGS

built-in



AC.700.10015/.. - NORA AC




~230V   S2  IP20      



downlight - square - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)	
AC.700.10015.1M	NW WW
AC.700.10015.2M	NW WW
AC.700.10015.14	NW WW

Lamp type
 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
 L100xB100xH100  36° reflector
 80  115

Options
 S1 - SET TORSION SPRINGS

built-in



AC.700.10018/.. - NORA AC





~230V   S2  IP20     



downlight - square - fixed - leading and trailing edge phase cut dimmable - led 230V + lens
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und Anschnitt - LED 230V + Lens

Ref cat (STD)	
AC.700.10018.1M	NW WW
AC.700.10018.2M	NW WW
AC.700.10018.14	NW WW

Lamp type
 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions
 L100xB100xH115  36° reflector
 80  130

Options
 S1 - SET TORSION SPRINGS

built-in



1471.SLA.S1../.. - KOZA

=350mA   S1  IP20    0,5 m  






downlight - round - fixed - with led
Einbaustrahler - rund - fest - mit Led

Lamp type

 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions

 Ø87xH120
 Ø80  130

Ref cat (STD)

1471.SLA.S1.1M	NW WW
1471.SLA.S1.2M	NW WW
1471.SLA.S1.11	NW WW
1471.SLA.S1.14	NW WW
1471.SLA.S1.45	NW WW

built-in



1471.SLA.S2../.. - KOZA

~230V   S2  IP20    0,3200  0,5 m  






downlight - round - fixed - with led
Einbaustrahler - rund - fest - mit Led

Lamp type

 1x LED AC 700lm CRI92 max. 9,5W  230V

Dimensions

 Ø87xH120
 Ø80  130

Ref cat (STD)

1471.SLA.S2.1M	NW WW
1471.SLA.S2.2M	NW WW
1471.SLA.S2.11	NW WW
1471.SLA.S2.14	NW WW
1471.SLA.S2.45	NW WW

built-in



5220.S1/.. - FLOU

~230V   S1     







downlight - round - fixed - down - with led
Einbaustrahler - rund - fest - down - mit Led

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 Ø90xH105  30° reflector
 Ø80  110

Ref cat (STD)

5220.S1.1M	NW WW
5220.S1.2M	NW WW
5220.S1.14	NW WW
5220.S1.45	NW WW

built-in


5220.S2/.. - FLOU

~230V   S2      







downlight - round - fixed - down - with led
Einbaustrahler - rund - fest - down - mit Led

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 Ø90xH105  30° reflector
 Ø80  110









Ref cat (STD)

5220.S2.1M	NW WW
5220.S2.2M	NW WW
5220.S2.14	NW WW
5220.S2.45	NW WW

built-in



1501.ZXO.S1/.. - CAMELEON DIM LED

~230V        



downlight - round - fixed
Einbaustrahler - rund - fest

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions









Ø89xH120 \wedge 90° reflector
Ø80 \swarrow 125

Ref cat (STD)

1501.ZXO.S1.1M	NW WW
1501.ZXO.S1.2M	NW WW
1501.ZXO.S1.14	NW WW
1501.ZXO.S1.28	NW WW
1501.ZXO.S1.45	NW WW

built-in

1501.ZXO.S2/.. - CAMELEON DIM LED

~230V        



downlight - round - fixed
Einbaustrahler - rund - fest

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions



Ø89xH120 \wedge 90° reflector
Ø80 \swarrow 125

Ref cat (STD)

1501.ZXO.S2.1M	NW WW
1501.ZXO.S2.2M	NW WW
1501.ZXO.S2.14	NW WW
1501.ZXO.S2.28	NW WW
1501.ZXO.S2.45	NW WW

built-in

1502.ZXO.S1/.. - CAMELEON DIM LED

~230V       



downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH120 \wedge 90° reflector
Ø80 \swarrow 125

Ref

1502.ZXO.S1.1M	NW WW
1502.ZXO.S1.2M	NW WW
1502.ZXO.S1.14	NW WW
1502.ZXO.S1.28	NW WW
1502.ZXO.S1.45	NW WW

built-in

1502.ZXO.S2/.. - CAMELEON DIM LED

~230V       



downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions








Ø89xH120 \wedge 90° reflector
Ø80 \swarrow 125

Ref cat (STD)

1502.ZXO.S2.1M	NW WW
1502.ZXO.S2.2M	NW WW
1502.ZXO.S2.14	NW WW
1502.ZXO.S2.28	NW WW
1502.ZXO.S2.45	NW WW

built-in

1503.ZXO.S1/.. - CAMELEON DIM LED

~230V  S1  IP20   0,3500  0,5 m  05.20.50  CE



downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH120 95° reflector
Ø80 125

Ref

1503.ZXO.S1.1M	NW WW
1503.ZXO.S1.2M	NW WW
1503.ZXO.S1.14	NW WW
1503.ZXO.S1.28	NW WW
1503.ZXO.S1.45	NW WW

built-in

1503.ZXO.S2/.. - CAMELEON DIM LED

~230V  S2  IP20   0,5 m  05.20.50  CE



downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH125 95° reflector
Ø80 135

Ref

1503.ZXO.S2.1M	NW WW
1503.ZXO.S2.2M	NW WW
1503.ZXO.S2.14	NW WW
1503.ZXO.S2.28	NW WW
1503.ZXO.S2.45	NW WW

built-in

1504.ZXO.S1/.. - CAMELEON DIM LED

~230V  S1  IP44     0,5 m  05.20.50  CE



downlight - round - fixed - with plexiglass
Einbaustrahler - rund - fest - mit Plexiglas

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH120 110° reflector
Ø80 125

Ref

1504.ZXO.S1.1M	NW WW
1504.ZXO.S1.2M	NW WW
1504.ZXO.S1.14	NW WW
1504.ZXO.S1.28	NW WW
1504.ZXO.S1.45	NW WW

built-in

1504.ZXO.S2/.. - CAMELEON DIM LED

~230V  S2  IP44     0,5 m  05.20.50  CE



downlight - round - fixed - with plexiglass
Einbaustrahler - rund - fest - mit Plexiglas

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions








Ø89xH120 110° reflector
Ø80 125

Ref

1504.ZXO.S2.1M	NW WW
1504.ZXO.S2.2M	NW WW
1504.ZXO.S2.14	NW WW
1504.ZXO.S2.28	NW WW
1504.ZXO.S2.45	NW WW

built-in

1506.ZXO.S1/.. - CAMELEON DIM LED

~230V   S1  IP20     







downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions









 Ø89xH120  70° reflector
 Ø80  125

Ref

1506.ZXO.S1.1M	NW WW
1506.ZXO.S1.2M	NW WW
1506.ZXO.S1.14	NW WW
1506.ZXO.S1.28	NW WW
1506.ZXO.S1.45	NW WW

built-in


1506.ZXO.S2/.. - CAMELEON DIM LED

~230V   S2  IP20     







downlight - round - fixed - conical
Einbaustrahler - rund - fest - konisch

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 Ø89xH120  70° reflector
 Ø80  125

Ref










1506.ZXO.S2.1M	NW WW
1506.ZXO.S2.2M	NW WW
1506.ZXO.S2.14	NW WW
1506.ZXO.S2.28	NW WW
1506.ZXO.S2.45	NW WW

built-in



S1 Torsion spring

1505.ZXO.S1/.. - CAMELEON DIM LED

~230V     IP20     



downlight - round - directional
Einbaustrahler - rund - schwenkbar

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions








Ø89xH120 \wedge 60° reflector
Ø80 \perp 125

Ref

1505.ZXO.S1.1M	NW WW
1505.ZXO.S1.2M	NW WW
1505.ZXO.S1.14	NW WW
1505.ZXO.S1.29	NW WW
1505.ZXO.S1.45	NW WW
1505.ZXO.S1.55	NW WW
1505.ZXO.S1.59	NW WW

built-in

1505.ZXO.S2/.. - CAMELEON DIM LED

~230V     IP20     



downlight - round - directional
Einbaustrahler - rund - schwenkbar

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH120 \wedge 60° reflector
Ø80 \perp 125

Ref

1505.ZXO.S2.1M	NW WW
1505.ZXO.S2.2M	NW WW
1505.ZXO.S2.14	NW WW
1505.ZXO.S2.29	NW WW
1505.ZXO.S2.45	NW WW
1505.ZXO.S2.55	NW WW
1505.ZXO.S2.59	NW WW

built-in



W3157/.. - MANTA IN

~230V



S1




IP65



0,4200

0,5

05.20.50



semi built-in and built-up ceiling light - round - fixed - with mat glass
Halbeinbau und Halbaufbau Deckenleuchte - rund - fest - mit mattem Glas

Lamptype

1x Led 230V max. 3,6W **A+** 230V

Dimensions

Ø100xH103

Ø82 ∟ 90

Options

S3147 - MANTA spare ring + glass

Ref

W3157.1MA	CW NW WW
W3157.2MA	CW NW WW
W3157.11MA	CW NW WW
W3157.22A	CW NW WW

semi built-in/up
ring + flat glass H25mm
Ring + flaches Glas H25mm

W3156/.. - MANTA IN DOUCHE

=24V-DC



S1




IP65



0,4200

0,5 m

05.20.50



semi built-in and built-up ceiling light - round - fixed - with mat glass - without transformer
Halbeinbau und Halbaufbau Deckenleuchte - rund - fest - mit mattem Glas - ohne Trafo

Lamptype

1x Led 24V-DC max. 3,6W **A+** 24V-DC

Dimensions

Ø100xH103

Ø82 ∟ 90

Options

S3147 - MANTA spare ring + glass

Ref

W3156.1MA	CW NW WW
W3156.2MA	CW NW WW
W3156.11MA	CW NW WW
W3156.22A	CW NW WW








semi built-in/up
ring + flat glass H25mm
Ring + flaches Glas H25mm
for showers
für Duschen



 **psmlighting**
a true delight

 **psmlighting**
a true delight


888.10024/.. - CITY





~230V  S2  IP20     



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)	
888.10024.1M	NW WW
888.10024.2M	NW WW
888.10024.14	NW WW
888.10024.16	NW WW

Lamp type
 1x LED 850lm CRI90 max. 10W 230V

Dimensions
 Ø80xH105  38° reflector
 70  115
 Reflector - Ø50

Options
 S1 - SET TORSION SPRINGS

built-in
 New LED generation
 Neue Led-Generation

888.10017/.. - CITY





~230V  S2  IP20      



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)	
888.10017.1M	NW WW
888.10017.2M	NW WW
888.10017.14	NW WW
888.10017.16	NW WW

Lamp type
 1x LED 850lm CRI90 max. 10W 230V

Dimensions
 Ø80xH117  38° reflector
 70  127
 Reflector - Ø50

Options
 S1 - SET TORSION SPRINGS

built-in
 New LED generation
 Neue LED-Generation

888.10018/.. - CITY





~230V  S2  IP20     



downlight - round - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)	
888.10018.1M	NW WW
888.10018.2M	NW WW
888.10018.14	NW WW
888.10018.16	NW WW








Lamp type
 1x LED 850lm CRI90 max. 10W 230V


Dimensions
 Ø80xH117  38° reflector
 70  127
 Reflector - Ø50

Options
 S1 - SET TORSION SPRINGS

built-in
 New LED generation
 Neue LED-Generation

888.10025/.. - CITY

~230V  S2  IP20     




downlight - square - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)


Ref cat (STD)



888.10025.1M	NW WW
888.10025.2M	NW WW
888.10025.14	NW WW

Lamptype

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L80xB80xH105  38° reflector

 70  115







Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue LED-Generation

888.10029/.. - CITY

~230V  S2  IP20     




downlight - square - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10029.1M	NW WW
888.10029.2M	NW WW
888.10029.14	NW WW

Lamptype

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L80xB80xH117  38° reflector

 70  127







Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue Led-Generation

888.10027/.. - CITY

~230V  S2  IP20     




downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)



Ref cat (STD)



888.10027.1M	NW WW
888.10027.2M	NW WW
888.10027.14	NW WW

Lamptype

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L80xB80xH117  38° reflector

 70  127

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue LED-Generation

888.10010/.. - CITY

~230V S2 LED C IP20 0,3500 0,5 m 05.20.50 CE



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH90 38° reflector

80 90

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

888.10010.1M	NW WW
888.10010.2M	NW WW
888.10010.14	NW WW
888.10010.16	NW WW

built-in
New LED generation
Neue LED-Generation

888.10011/.. - CITY

~230V S2 LED C IP20 0,3800 0,5 m 05.20.50 CE



downlight - round - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH90 38° reflector

80 90

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

888.10011.1M	NW WW
888.10011.2M	NW WW
888.10011.14	NW WW
888.10011.16	NW WW

built-in
New LED generation
Neue LED-Generation

888.10014/.. - CITY

~230V S2 LED C IP20 0,3800 0,5 m 05.20.50 CE



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø89xH100 38° reflector

80 100

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

888.10014.1M	NW WW
888.10014.2M	NW WW
888.10014.14	NW WW

built-in
New LED generation
Neue LED-Generation

888.10016/.. - CITY

~230V S2 LED C IP20 0,3300 0,5 m 05.20.50 CE



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø87xH125 38° reflector

80 125

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS


Ref cat (STD)

888.10016.1M	NW WW
888.10016.2M	NW WW
888.10016.14	NW WW

built-in
New LED generation
Neue LED-Generation

888.10012/.. - CITY

~230V  S2  IP20    0,3700  0,5 m  05.20.50 




downlight - square - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)



Ref cat (STD)



888.10012.1M	NW WW
888.10012.2M	NW WW
888.10012.14	NW WW

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L100xB100xH90  38° reflector

 80  90

Reflector - Ø50


Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue LED-Generation

888.10013/.. - CITY

~230V  S2  IP20    0,4600  0,5 m  05.20.50 




downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)



888.10013.1M	NW WW
888.10013.2M	NW WW
888.10013.14	NW WW

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L100xB100xH90  38° reflector

 80  90

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue LED-Generation

888.10015/.. - CITY

~230V  S2  IP20    0,4800  0,5 m  05.20.50 




downlight - square - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10015.1M	NW WW
888.10015.2M	NW WW
888.10015.14	NW WW

Lamp type

 1x LED 850lm CRI90 max. 10W 230V

Dimensions

 L100xB100xH100  38° reflector

 80  100

Reflector - Ø50

Options

S1 - SET TORSION SPRINGS

built-in
New LED generation
Neue Led-Generation

888.10019/.. - CITY

~230V S2 LED C IP20 0,4600 0,5 m 05.20.50 CE



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10019.1M	NW WW
888.10019.2M	NW WW
888.10019.14	NW WW

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø109xH100 40° reflector

Ø100 100

Reflector - Ø70

Options

S1 - SET TORSION SPRINGS

built-in

New LED generation
Neue LED-Generation

888.10020/.. - CITY

~230V S2 LED C IP20 0,4600 0,5 m 05.20.50 CE



downlight - round - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10020.1M	NW WW
888.10020.2M	NW WW
888.10020.14	NW WW

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø109xH100 40° reflector

Ø100 100

Reflector - Ø70

Options

S1 - SET TORSION SPRINGS

built-in

New LED generation
Neue LED-Generation

888.10021/.. - CITY

~230V S2 LED C IP20 0,4800 1 m 05.20.50 CE



downlight - round - fixed - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10021.1M	NW WW
888.10021.2M	NW WW
888.10021.14	NW WW

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø130xH110 40° reflector

Ø122 110

Reflector - Ø111

Options


S1 - SET TORSION SPRINGS

built-in

New LED generation
Neue LED-Generation

888.10022/.. - CITY

~230V S2 LED C IP20 0,5750 1 m 05.20.50 CE



downlight - round - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10022.1M	NW WW
888.10022.2M	NW WW
888.10022.14	NW WW

Lamp type

1x LED 850lm CRI90 max. 10W 230V

Dimensions

Ø150xH110 40° reflector

Ø135 110

Reflector - Ø111

Options

S1 - SET TORSION SPRINGS

built-in

New LED generation
Neue LED-Generation

888.10031/.. - CITY

~230V S4 LED C IP20 1,2500 0,5 m 05.20.50 CE



downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
 Einbaustrahler - viereckig - schwenkbar - dimmbar
 Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10031.1M NW | WW
 888.10031.2M NW | WW

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions

L132xB132xH122 40° reflector
 124x124 130
 Reflector - Ø70

built-in
 New LED generation
 Neue LED-Generation

888.10032/.. - CITY

~230V S4 LED C IP20 2,0500 0,5 m 05.20.50 CE



downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
 Einbaustrahler - viereckig - schwenkbar - dimmbar
 Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10032.1M NW | WW
 888.10032.2M NW | WW

Lamptype

2x LED 850lm CRI90 max. 10W 230V

Dimensions

L237xB132xH122 40° reflector
 229x124 130
 Reflector - Ø70

built-in
 New LED generation
 Neue LED-Generation

888.10041/.. - CITY

~230V S4 LED C IP20 1 m 05.20.50 CE



downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
 Einbaustrahler - viereckig - schwenkbar - dimmbar
 Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10041.1M NW | WW
 888.10041.2M NW | WW

Lamptype

1x LED 850lm CRI90 max. 10W 230V

Dimensions

L160xB160xH160 40° reflector
 152x152 170
 Reflector - Ø111

built-in
 New LED generation
 Neue LED-Generation

888.10042/.. - CITY

~230V S4 LED C IP20 1 m 05.20.50 CE



downlight - square - directional - dimmable leading and trailing edge - set (led 230V + reflector + spot)
 Einbaustrahler - viereckig - schwenkbar - dimmbar
 Phasenabschnitt und anschnitt - Set (LED 230V + Reflektor + Strahler)

Ref cat (STD)

888.10042.1M NW | WW
 888.10042.2M NW | WW

Lamptype

2x LED 850lm CRI90 max. 10W 230V

Dimensions

L306xB160xH160 40° reflector
 298x152 170
 Reflector - Ø111

built-in
 New LED generation
 Neue LED-Generation

1520A.LED/.. - SNOWBOX LED

=700mA IP20 05.20.50



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1520A.LED.1M	NW WW
1520A.LED.2M	NW WW

Lamp type

1x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions

L160xB160xH145
 145x145 165

built-in

1520B.LED/.. - SNOWBOX LED

=700mA IP20 05.20.50



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1520B.LED.1M	NW WW
1520B.LED.2M	NW WW

Lamp type

1x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions

L200xB200xH175
 160x160 195

Options

87500191 - TRIDONIC DRIVER

built-in

1520C.LED/.. - SNOWBOX LED

=700mA IP20 05.20.50



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1520C.LED.1M	NW WW
1520C.LED.2M	NW WW

Lamp type

1x Led 2000lm CRI80 max. 15,2W - 700mA

Dimensions

L270xB270xH225
 220x220 245

Options

87500191 - TRIDONIC DRIVER

built-in

1522A.LED/.. - SNOWBOX LED

=700mA IP20 05.20.50



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1522A.LED.1M	NW WW
1522A.LED.2M	NW WW

Lamp type

2x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions

L265xB160xH145
 235x145 165

built-in

1522B.LED/.. - SNOWBOX LED

=700mA IP20



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1522B.LED.1M	NW WW
1522B.LED.2M	NW WW

Lamp type

2x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions

L323xB200xH175
 275x165 195



built-in

1522C.LED/.. - SNOWBOX LED

=700mA IP20



built-in ceiling light - square - without LED driver
Einbau Deckenleuchte - viereckig - ohne Driver LED

Ref cat (STD)

1522C.LED.1M	NW WW
1522C.LED.2M	NW WW

Lamp type

2x Led 2000lm CRI80 max. 15,2W - 700mA

Dimensions

L448xB270xH225
 390x220 245



built-in



1253.LED/.. - QUADRO

~230V



IP20



4,2800



0,5 m



built-in ceiling light - square - with glass
Einbau Deckenleuchte - viereckig - mit Glas

Lamp type

2x Led 960lm CRI80 max. 13W **A+** 230V

Dimensions

L250xB250xH150

220x220 JKL 170

Materials

aluminium 1M | 2M | 11M

Ref cat (STD)

1253.LED.1M.NW	white tex
1253.LED.2M.NW	black tex
1253.LED.11M	grey tex

built-in
standard with sandblasted glass
standard mit sandgestrahltem Glas

1256.LED/.. - QUADRO

~230V



IP20



0,5 m



05.20.50



built-in ceiling light - square
Einbau Deckenleuchte - viereckig

Lamp type

2x Led 960lm CRI80 max. 13W **A+** 230V

Dimensions

L250xB250xH150

220x220 JKL 170

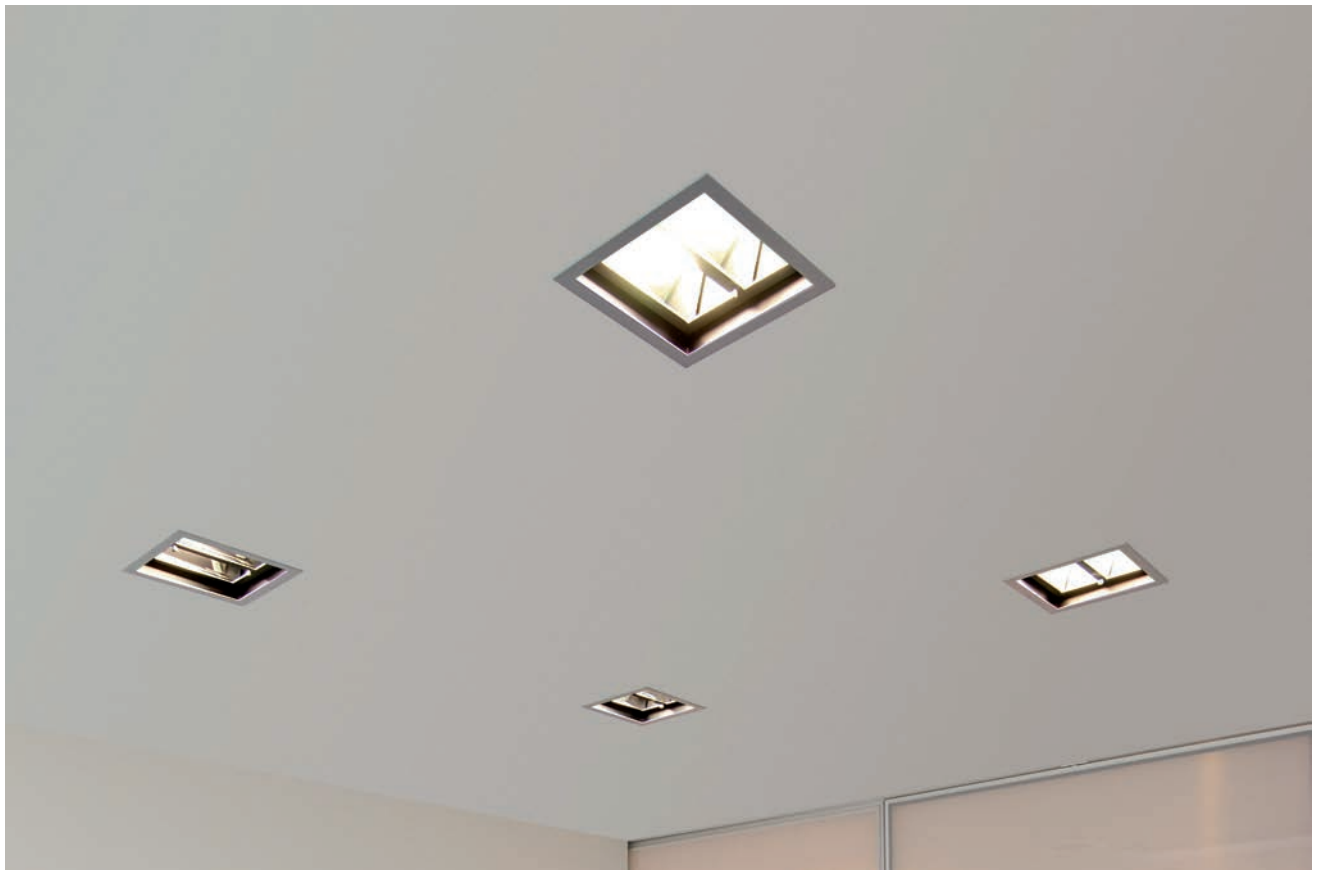
Materials

aluminium 1M | 2M | 11M

Ref cat (STD)

1256.LED.1M.NW	white tex
1256.LED.2M.NW	black tex
1256.LED.11M.NW	grey tex

built-in
not dimmable
nicht Dimbar



24V-DC

Code	Input voltage	Output current	Output power	Max power factor	Dimensions	0-10V	1-10V	PUSH	DALI	Phase cut-on	Phase cut-off	Casambi	Not dimmable	Price
GEARER14PU06/..	230V 50Hz	12A	12.00W	0,90	L100xB48xH39									€60,86
TR122434/..	230V 50Hz	0,54A	13.00W	0,60	L194xB20xH20									€35,14
TR122442/..	230V 50Hz	0,54A	13.00W	0,60	L158xB22xH19									€30,43
TR123403/..	230V 50Hz	0,62A	15.00W	0,92	L111xB52xH22									€50,35
TR123680/..	230V 50Hz	0,7A	17.00W	0,96	L124xB79xH22									€59,15
LPV2024/..	230V 50Hz	0,83A	20.00W	0,90	L118xB35xH26									€21,98
TR122200/..	230V 50Hz	1,05A	20.00W	0,98	L103xB67xH21									€48,90
TR123400/..	230V 50Hz	0,9A	20.00W	0,95	L111xB52xH22									€40,57
TR123424/..	230V 50Hz	0,83A	20.00W	0,95	L103xB67xH21									€49,70
TR122260/..	230V 50Hz	0,9A	20.00W	0,97	L166xB46xH34									€64,84
TR127556/..	230V 50Hz	0,83A	20.00W	0,85	L110xB52xH22									€44,52
LPV3524/..	230V 50Hz	1,45A	35.00W	0,90	L148xB40xH30									€31,66
TR127552/..	230V 50Hz	2,08A	50.00W	0,95	L110xB76xH30									€76,00
LPV6024/..	230V 50Hz	2,5A	60.00W	0,90	L162xB42,5xH32									€35,65
HDR60-24/..	230V 50Hz	2,5A	60.00W	0,90	L52,5xB90xH54,5									€43,75
LPV10024/..	230V 50Hz	4,2A	100.00W	0,90	L190xB52xH37									€58,50
HDR100-24N/..	230V 50Hz	4,2A	100.00W	0,90	L70xB90xH54,5									€61,25
LPV15024/..	230V 50Hz	6,25A	150.00W	0,90	L191xB63xH37,5									€81,36
HDR150-24/..	230V 50Hz	6,25A	150.00W	0,90	L105xB90xH54,5									€78,05
NDR240-24/..	230V 50Hz	10A	240.00W	0,98	L63xB125,2xH113,5									€123,20
NDR480-24/..	230V 50Hz	20A	480.00W	0,98	L85,5xB125,2xH128,5									€240,45



3190/.. - OBELIX

=24V-DC 0,1400 0,5 m 05.20.50



downlight for veranda profiles - round - down - with cable
0,75m + AMP plug - without transformer
Einbaustrahler für Verandaprofilen - rund - down - mit Kabel
0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

3190.1M	CW NW WW
3190.2M	CW NW WW
3190.14	CW NW WW

Lamp type

1x powered 24V-DC 117lm max. 3,4W 24V-DC

Dimensions

Ø44xH38 43° reflector
 Ø40 50

Options

- S3188 - KASTAR-OBELIX
- TR122434 - TRANSFO
- TR122442 - TRANSFO

built-in



3191/.. - OBELIX

=24V-DC 0,1400 0,5 05.20.50



downlight for veranda profiles - square - down - with cable
0,75m + AMP plug - without transformer
Einbaustrahler für Verandaprofilen - viereckig - down - mit
Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

3191.1M	CW NW WW
3191.2M	CW NW WW
3191.14	CW NW WW

Lamp type

1x powered 24V-DC 117lm max. 3,4W 24V-DC

Dimensions

L44xB44xH38 43° reflector
 Ø40 50

Options

- S3188 - KASTAR-OBELIX
- TR122434 - TRANSFO
- TR122442 - TRANSFO

built-in



INDOOR | Ceiling IN | Ledmodules | OBELIX

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

S3183/.. - KASTAR-OBELIX

IP20   0,0400 



accessory for downlight - extension lead 1M
Zubehör für Einbaustrahler - Verlängerungskabel 1M
Cable - L1000

Ref cat (STD)
S3183

S3184/.. - KASTAR-OBELIX

IP20   0,0800 



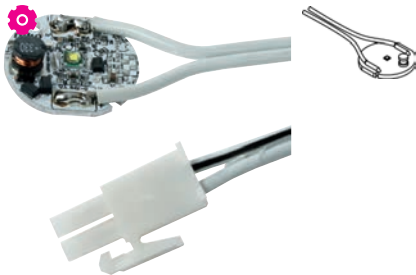
accessory for downlight - extension lead 2M
Zubehör für Einbaustrahler - Verlängerungskabel 2M
Cable - L2000

Ref cat (LONG)
S3184

longer dimensions on request
längere Abmessungen auf Anfrage

S3186/.. - KASTAR-OBELIX

=24V-DC    IP20   0,5 m  05,20.50 



accessory for downlight - LED 3,4W + cable 0,75m + AMP
plug - without transformer
Zubehör für Einbaustrahler - LED 3,4W + Kabel 0,75m + AMP-
Stecker - ohne Trafo

Ref cat (STD)








S3186	WW
S3186	NW
S3186	CW

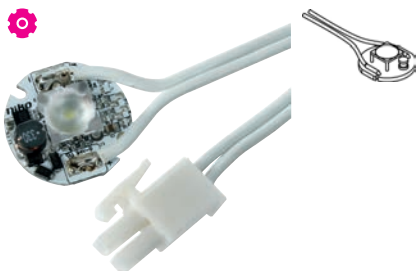
Lamp type

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

24V-DC parallel connection
Parallelschaltung

S3187/.. - KASTAR-OBELIX

=24V-DC    IP20   0,5 m  05,20.50 



accessory for downlight - LED 3,4W with lens 43° + cable
0,75m + AMP plug - without transformer
Zubehör für Einbaustrahler - LED 3,4W mit Linse 43° + Kabel
0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

S3187	WW
S3187	NW
S3187	CW

Lamp type

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

g 43° reflector

^ 43° reflector

24V-DC parallel connection
Parallelschaltung

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturrell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W3190/.. - OBELIX

=24V-DC         



downlight for veranda profiles - round - down - with cable
0,75m + AMP plug - without transformer
Einbaustrahler für Verandaprofilen - rund - down - mit Kabel
0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

W3190.31MA

W3190.32A

CW | NW | WW



CW | NW | WW



Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 Ø44xH38  43° reflector

 Ø40  50

Options

S3188 - KASTAR-OBELIX

TR122434 - TRANSFO

TR122442 - TRANSFO

built-in

W3191/.. - OBELIX

=24V-DC        



downlight for veranda profiles - square - down - with cable
0,75m + AMP plug - without transformer
Einbaustrahler für Verandaprofilen - viereckig - down - mit
Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

W3191.31MA

W3191.32A

CW | NW | WW



CW | NW | WW




Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 L44xB44xH38  43° reflector

 Ø40  50

Options

S3188 - KASTAR-OBELIX

TR122434 - TRANSFO

TR122442 - TRANSFO

built-in





Kastar

speciaal voor keuken - en badkamerkasten
 pour armoires de cuisine & salle de bains
 Insbesondere für Küchen - und Badezimmerschränke
 especially for kitchen - and bathroom cabinets

3180.S1/.. - KASTAR

=24V-DC S1 IP44 0,1400 0,5 m 05.20.50



built-in ceiling and wall light - round - with cable 0,75m + AMP plug - without transformer
 Decken- und Wandleuchte für Einbau - rund - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Lamp type

1x powered 24V-DC 117lm max. 3,4W 24V-DC

Dimensions

Ø70xH17

Ø60 30

Options

S6.60 - PLASTERKIT
 TR122434 - TRANSFO
 TR122442 - TRANSFO

Ref cat (STD)

3180.S1.1M	CW NW WW
3180.S1.2M	CW NW WW
3180.S1.14	CW NW WW
3180.S1.24	CW NW WW

built-in

parallel connection - without lens - not dimmable
 Parallelschaltung - ohne Linse - nicht abblendbar
 especially for kitchen & bathroom cabinets
 für Anwendung in Badezimmer- & Küchenschranken

3180.S2/.. - KASTAR

=24V-DC S2 IP44 0,1250 0,5 m 05.20.50



built-in ceiling and wall light - round - with cable 0,75m + AMP plug - without transformer
 Decken- und Wandleuchte für Einbau - rund - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Lamp type

1x powered 24V-DC 117lm max. 3,4W 24V-DC

Dimensions

Ø70xH17

Ø60 18

Options

S6.60 - PLASTERKIT
 TR122434 - TRANSFO
 TR122442 - TRANSFO

Ref cat (STD)

3180.S2.1M	CW NW WW
3180.S2.2M	CW NW WW
3180.S2.14	CW NW WW
3180.S2.24	CW NW WW

built-in

parallel connection - without lens - not dimmable
 Parallelschaltung - ohne Linse - nicht abblendbar
 especially for kitchen & bathroom cabinets
 für Anwendung in Badezimmer- & Küchenschranken

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

3181.S1/.. - KASTAR

=24V-DC     S1 IP44     



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)	
3181.S1.1M	CW NW WW
3181.S1.2M	CW NW WW
3181.S1.14	CW NW WW
3181.S1.24	CW NW WW

Lamp type
 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions
L70xB70xH17
Ø60  30

Options
S6.60 - PLASTERKIT
TR122434 - TRANSFO
TR122442 - TRANSFO

built-in
parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
especially for kitchen & bathroom cabinets
für Anwendung in Badezimmer- & Küchenschranken

3181.S2/.. - KASTAR

=24V-DC     S2 IP44      



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)	
3181.S2.1M	CW NW WW
3181.S2.2M	CW NW WW
3181.S2.14	CW NW WW
3181.S2.24	CW NW WW

Lamp type
 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions
L70xB70xH17
Ø60  18

Options
S6.60 - PLASTERKIT
TR122434 - TRANSFO
TR122442 - TRANSFO

built-in
parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
especially for kitchen & bathroom cabinets
für Anwendung in Badezimmer- & Küchenschranken

3182.S1/.. - KASTAR

=24V-DC     S1 IP44     



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)	
3182.S1.1M	CW NW WW
3182.S1.2M	CW NW WW
3182.S1.14	CW NW WW
3182.S1.24	CW NW WW

Lamp type
 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions
B70xH70xD17
Ø60  30

Options
S6.60 - PLASTERKIT
TR122434 - TRANSFO
TR122442 - TRANSFO

built-in
parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
especially for kitchen & bathroom cabinets
für Anwendung in Badezimmer- & Küchenschranken

3182.S2/.. - KASTAR

=24V-DC     S2 IP44      



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)	
3182.S2.1M	CW NW WW
3182.S2.2M	CW NW WW
3182.S2.14	CW NW WW
3182.S2.24	CW NW WW

Lamp type
 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions
L70xB70xH17
Ø60  18

Options
S6.60 - PLASTERKIT
TR122434 - TRANSFO
TR122442 - TRANSFO

built-in
parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
especially for kitchen & bathroom cabinets
für Anwendung in Badezimmer- & Küchenschranken

INDOOR | Ceiling IN | Ledmodules | KASTAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W3180.S1/.. - KASTAR

=24V-DC     S1 IP54      



built-in ceiling and wall light - round - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - rund - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)


W3180.S1.37A

CW | NW | WW

Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 Ø70xH17

 Ø60  30

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO

TR122442 - TRANSFO

built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W3180.S2/.. - KASTAR

=24V-DC     S2 IP54      



built-in ceiling and wall light - round - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - rund - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)


W3180.S2.37A

CW | NW | WW

Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 Ø70xH17

 Ø60  18

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO

TR122442 - TRANSFO

built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W3181.S1/.. - KASTAR

=24V-DC     S1 IP54     



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)


W3181.S1.37A

CW | NW | WW

Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 L70xB70xH17

 Ø60  30

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO


TR122442 - TRANSFO

built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W3181.S2/.. - KASTAR

=24V-DC     S2 IP54     



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)


W3181.S2.37A



CW | NW | WW

Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 L70xB70xH17

 Ø60  18

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO

TR122442 - TRANSFO









built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W3182.S1/.. - KASTAR

=24V-DC     S1 IP54     



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

W3182.S1.37A


CW | NW | WW



Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 L70xB70xH17

 Ø60  30

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO


TR122442 - TRANSFO

built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W3182.S2/.. - KASTAR

=24V-DC     S2 IP54      



built-in ceiling and wall light - square - with cable 0,75m + AMP plug - without transformer
Decken- und Wandleuchte für Einbau - viereckig - mit Kabel 0,75m + AMP-Stecker - ohne Trafo

Ref cat (STD)

W3182.S2.37A


CW | NW | WW



Lamptype

 1x powered 24V-DC 117lm max. 3,4W  24V-DC

Dimensions

 L70xB70xH17

 Ø60  18

Options

S6.60 - PLASTERKIT

TR122434 - TRANSFO

TR122442 - TRANSFO

built-in

parallel connection - without lens - not dimmable
Parallelschaltung - ohne Linse - nicht abblendbar
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen



8350/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L48xB48xH36 48° reflector
 40x40 40

Ref cat (STD)

8350.1M	NW WW
8350.2M	NW WW
8350.4	NW WW
8350.14	NW WW
8350.16	NW WW
8350.29	NW WW
8350.45	NW WW
8350.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8351/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L73xB48xH36 48° reflector
 64x36 40

Ref cat (STD)

8351.1M	NW WW
8351.2M	NW WW
8351.4	NW WW
8351.14	NW WW
8351.16	NW WW
8351.29	NW WW
8351.45	NW WW
8351.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8352/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L63xB63xH36 48° reflector
 54x54 40

Ref cat (STD)

8352.1M	NW WW
8352.2M	NW WW
8352.4	NW WW
8352.14	NW WW
8352.16	NW WW
8352.29	NW WW
8352.45	NW WW
8352.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8355/.. - STELLA IN

=350mA    IP20     





semi built-in and built-up spot - square - fixed - with square
Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit
Viereckige Zia Led - ohne Driver LED



Ref cat (STD)

8355.1M	NW WW
8355.2M	NW WW
8355.4	NW WW
8355.14	NW WW
8355.16	NW WW
8355.29	NW WW
8355.45	NW WW
8355.49	NW WW

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

L48xB48xH36  48° reflector
40x40  40

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8356/.. - STELLA IN

=350mA    IP20     





semi built-in and built-up spot - square - fixed - with square
Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit
Viereckige Zia Led - ohne Driver LED



Ref cat (STD)

8356.1M	NW WW
8356.2M	NW WW
8356.4	NW WW
8356.14	NW WW
8356.16	NW WW
8356.29	NW WW
8356.45	NW WW
8356.49	NW WW

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

L73xB48xH36  48° reflector
64x36  40

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8357/.. - STELLA IN

=350mA    IP20     





semi built-in and built-up spot - square - fixed - with square
Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit
Viereckige Zia Led - ohne Driver LED



Ref cat (STD)

8357.1M	NW WW
8357.2M	NW WW
8357.4	NW WW
8357.14	NW WW
8357.16	NW WW
8357.29	NW WW
8357.45	NW WW
8357.49	NW WW

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

L63xB63xH36  48° reflector
54x54  40




semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe





8360/.. - STELLA IN

=350mA    S1 IP20    0,1100  0,5 m  05.20.50  CE



downlight - square - fixed - with round Zia Led - without LED driver
 Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type
 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
 L48xB48xH45  48° reflector
 40  L 50

Ref cat (STD)	
8360.1M	NW WW
8360.2M	NW WW
8360.4	NW WW
8360.14	NW WW
8360.16	NW WW
8360.29	NW WW
8360.45	NW WW
8360.49	NW WW




*built-in
 with limited built-in depth
 mit eingeschränkter Einbautiefe*





8361/.. - STELLA IN

=350mA    S1 IP20    0,5 m  05.20.50  CE



downlight - square - fixed - with round Zia Led - without LED driver
 Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type
 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
 L73xB48xH45  48° reflector
 64x36  L 50

Ref cat (STD)	
8361.1M	NW WW
8361.2M	NW WW
8361.4	NW WW
8361.14	NW WW
8361.16	NW WW
8361.29	NW WW
8361.45	NW WW
8361.49	NW WW



*built-in
 with limited built-in depth
 mit eingeschränkter Einbautiefe*





8362/.. - STELLA IN

=350mA    S1 IP20    0,5 m  05.20.50  CE



downlight - square - fixed - with round Zia Led - without LED driver
 Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type
 1x led 467lm CRI80 max. 3,8W  -  350mA


Dimensions
 L63xB63xH45  48° reflector
 54x54  L 50

Ref cat (STD)	
8362.1M	NW WW
8362.2M	NW WW
8362.4	NW WW
8362.14	NW WW
8362.16	NW WW
8362.29	NW WW
8362.45	NW WW
8362.49	NW WW

*built-in
 with limited built-in depth
 mit eingeschränkter Einbautiefe*

8364/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

2x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L183xB48xH36 48° reflector
 175x41,5 R 40


Ref cat (STD)

8364.1M	NW WW
8364.2M	NW WW
8364.14	NW WW
8364.29	NW WW
8364.45	NW WW
8364.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8365/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with square Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Viereckige Zia Led - ohne Driver LED

Lamp type

2x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L183xB48xH36 48° reflector
 175x41,5 R 40


Ref cat (STD)

8365.1M	NW WW
8365.2M	NW WW
8365.14	NW WW
8365.29	NW WW
8365.45	NW WW
8365.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8366/.. - STELLA IN

=350mA IP20



downlight - square - fixed - with round Zia Led - without LED driver
Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

2x led 467lm CRI80 max. 3,8W - 350mA

Dimensions







L183xB48xH36 48° reflector
 174x41,5 R 40

Ref cat (STD)

8366.1M	NW WW
8366.2M	NW WW
8366.14	NW WW
8366.29	NW WW
8366.45	NW WW
8366.49	NW WW

built-in
with limited built-in depth
mit eingeschränkter Einbautiefe




8376/.. - STELLA IN

=350mA    IP20    0,2700  0,5 m  05.20.50 



downlight - square - fixed - with round Zia Led - without LED driver
 Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED







Ref cat (SPX)	
8376.1M	NW WW
8376.2M	NW WW
8376.14	NW WW

Lamp type
 2x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
 L233xB48xH45  48° reflector
 222X41,5  JL 50

*built-in
 with limited built-in depth
 mit eingeschränkter Einbautiefe*




8377/.. - STELLA IN





=350mA    IP20    0,3100  0,5 m  05.20.50 



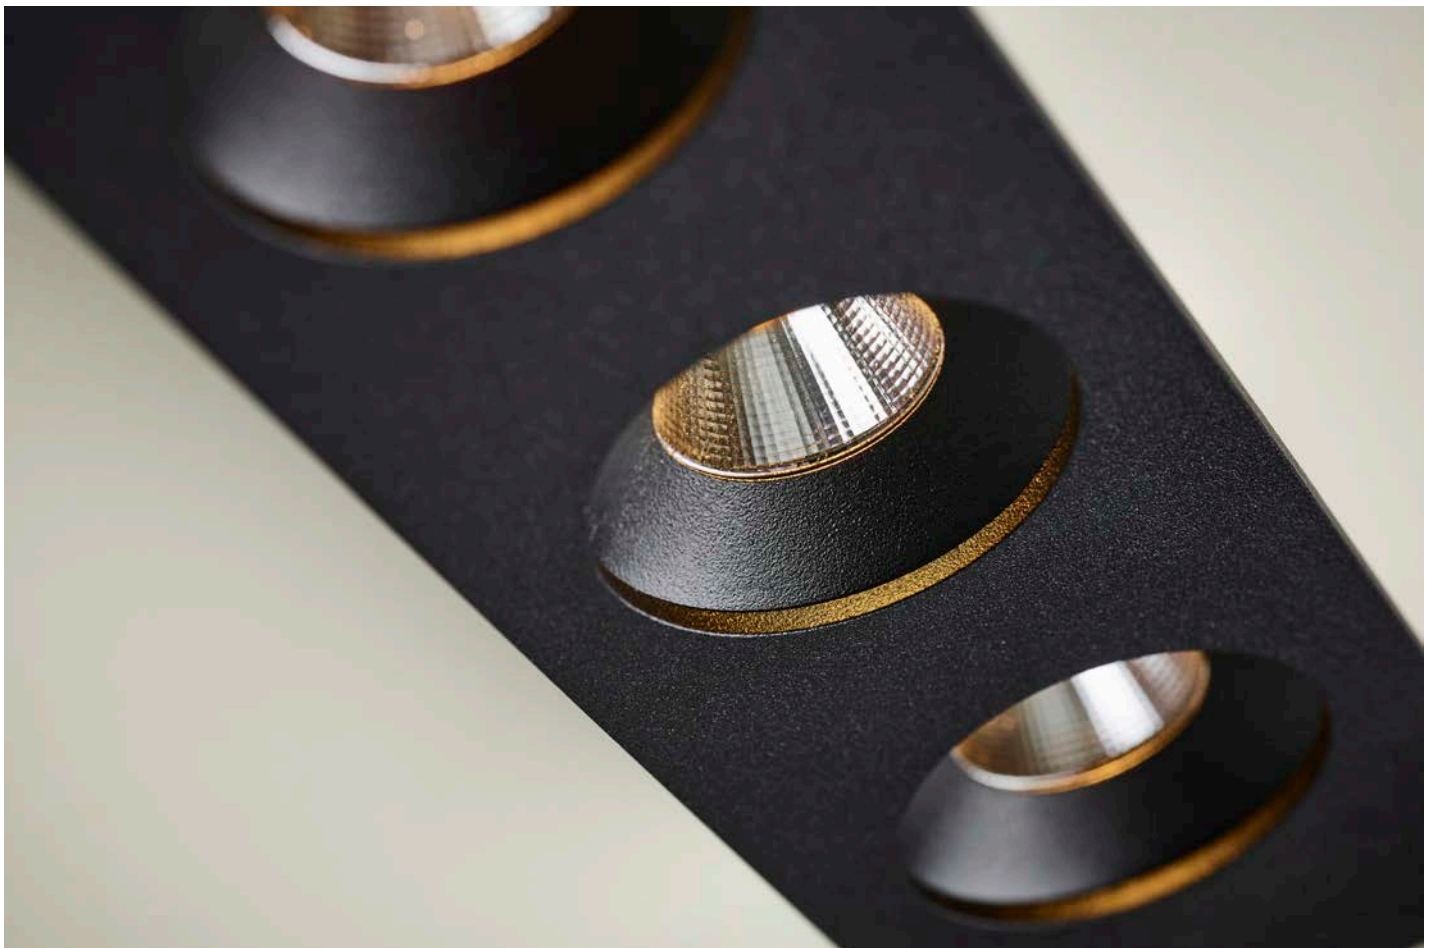
downlight - fixed - with round Zia Led - without LED driver
 Einbaustrahler - fest - mit Runde Zia Led - ohne Driver LED

Ref cat (SPX)	
8377.1M	NW WW
8377.2M	NW WW
8377.14	NW WW

Lamp type
 2x led 467lm CRI80 max. 3,8W  -  350mA


Dimensions
 L233xB48xH36  48° reflector
 222X41,5  JL 55

*built-in
 with limited built-in depth
 mit eingeschränkter Einbautiefe 35-40mm*






8367/.. - STELLA IN

=350mA    IP20     







semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

 3x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L183xB48xH36  48° reflector
 174x41,5  40


Ref cat (STD)

8367.1M	NW WW
8367.2M	NW WW
8367.14	NW WW
8367.29	NW WW
8367.45	NW WW
8367.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe




8368/.. - STELLA IN

=350mA    IP20     







semi built-in and built-up spot - square - fixed - with square Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Viereckige Zia Led - ohne Driver LED

Lamp type

 3x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L183xB48xH36  48° reflector
 174x41,5  40

Ref cat (STD)

8368.1M	NW WW
8368.2M	NW WW
8368.14	NW WW
8368.29	NW WW
8368.45	NW WW
8368.49	NW WW

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe




8369/.. - STELLA IN

=350mA    IP20      







downlight - square - fixed - with round Zia Led - without LED driver
Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Lamp type

 3x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L183xB48xH45  48° reflector
 174x41,5  50

Ref cat (STD)

8369.1M	NW WW
8369.2M	NW WW
8369.14	NW WW
8369.29	NW WW
8369.45	NW WW
8369.49	NW WW

built-in
with limited built-in depth
mit eingeschränkter Einbautiefe

8370/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Ref cat (STD)

8370.1M	NW WW
8370.2M	NW WW
8370.14	NW WW
8370.29	NW WW
8370.45	NW WW
8370.49	NW WW

Lamp type

4x led 467lm CRI80 max. 3,8W - 350mA


Dimensions

L233xB48xH36 48° reflector
 222X41,5 40

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8371/.. - STELLA IN

=350mA IP20



semi built-in and built-up spot - square - fixed - with square Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Viereckige Zia Led - ohne Driver LED

Ref cat (STD)

8371.1M	NW WW
8371.2M	NW WW
8371.14	NW WW
8371.29	NW WW
8371.45	NW WW
8371.49	NW WW

Lamp type

4x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L233xB48xH36 48° reflector
 222X41,5 40

semi built-in/up
with limited built-in depth
mit eingeschränkter Einbautiefe

8372/.. - STELLA IN

=350mA IP20



downlight - square - fixed - with round Zia Led - without LED driver
Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Ref cat (STD)

8372.1M	NW WW
8372.2M	NW WW
8372.14	NW WW
8372.29	NW WW
8372.45	NW WW
8372.49	NW WW

Lamp type

4x led 467lm CRI80 max. 3,8W - 350mA

Dimensions

L233xB48xH45 48° reflector
 222X41,5 50

built-in
with limited built-in depth
mit eingeschränkter Einbautiefe

8373/.. - STELLA IN

=350mA    IP20     






semi built-in and built-up spot - square - fixed - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED





Ref cat (STD)

8373.1M	NW WW
8373.2M	NW WW
8373.14	NW WW

Lamp type

 4x led 467lm CRI80 max. 3,8W  -  350mA


Dimensions

 L120xB120xH45  48° reflector
 105x105  55

semi built-in/up

8374/.. - STELLA IN

=350mA    IP20     






semi built-in and built-up spot - square - fixed - with square Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - fest - mit Viereckige Zia Led - ohne Driver LED





Ref cat (STD)

8374.1M	NW WW
8374.2M	NW WW
8374.14	NW WW

Lamp type

 4x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L120xB120xH45  48° reflector
 105x105  55

semi built-in/up

8375/.. - STELLA IN

=350mA    IP20     






downlight - square - fixed - with round Zia Led - without LED driver
Einbaustrahler - viereckig - fest - mit Runde Zia Led - ohne Driver LED

Ref cat (STD)

8375.1M	NW WW
8375.2M	NW WW
8375.14	NW WW

Lamp type

 4x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L120xB120xH50  48° reflector
 105x105  60

semi built-in/up

8380/.. - STELLA IN

=350mA    IP20     






semi built-in and built-up spot - square - directional - with round Zia Led - without LED driver
Halbeinbau und Halbaufbau strahler - viereckig - schwenkbar - mit Runde Zia Led - ohne Driver LED




Ref cat (STD)

8380.1M	NW WW
8380.14	NW WW
8380.29	NW WW
8380.49	NW WW

Lamp type

 4x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 L120xB120xH55  48° reflector
 105x105  65

semi built-in/up

LED colors: cool white 6000K (CW) - 3000K warm white (WW) neutral white 4000K (NW) Other LED colors on request

LED-Farben: kühles Weiß 6000K (CW) - 3000K warmweiß (WW) neutral weiß 4000K (NW) Andere LED-Farben auf Anfrage




ZIAMINILED/.. - Ø29

=350mA   IP44    






built-in ceiling and wall light - round - without LED driver
Decken- und Wandleuchte für Einbau - rund - ohne Driver LED

Lamp type

 1x powered 350mA max. 1W  -  350mA

Dimensions

 L40xH16
 Ø29  16

Options



LTLED1CC.350mA - DRIVER constant current
S6.30 - PLASTERKIT

Ref

ZIAMINILED.1M.B	B CW WW
ZIAMINILED.2M.B	B CW WW
ZIAMINILED.11.B	B CW WW
ZIAMINILED.13	B CW WW
ZIAMINILED.14.B	B CW WW
ZIAMINILED.16	B CW WW

built-in




ZIAMINI.C.LED/.. - Ø29

=350mA   IP44    






built-in ceiling and wall light - square - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - ohne Driver LED

Lamp type

 1x powered 350mA max. 1W  -  350mA

Dimensions

 L40xB40xH16
 Ø29  16

Options

LTLED1CC.350mA - DRIVER constant current
S6.30 - PLASTERKIT

Ref

ZIAMINI.C.LED.1.B	B CW WW
ZIAMINI.C.LED.11.B	B CW WW
ZIAMINI.C.LED.13	B CW WW
ZIAMINI.C.LED.14.B	B CW WW
ZIAMINI.C.LED.16.B	B CW WW

built-in




ZIAMINICLED/.. - Ø29

=350mA   IP44    






built-in ceiling and wall light - square - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - ohne Driver LED

Lamp type

 1x powered 350mA max. 1W  -  350mA

Dimensions

 L40xB40xH19
 Ø29  16

Options

LTLED1CC.350mA - DRIVER constant current
S6.30 - PLASTERKIT

Ref

ZIAMINICLED.1M.B	B CW WW
ZIAMINICLED.2M.B	B CW WW
ZIAMINICLED.11.B	B CW WW
ZIAMINICLED.13	B CW WW
ZIAMINICLED.14.B	B CW WW
ZIAMINICLED.16	B CW WW

built-in



Zita

Endless combinations



ZITA35C/.. - ZITA SLO -T4

=350mA S2 0,5 m



downlight - square - without LED driver
Einbaustrahler - viereckig - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

L41,5xB41,5xH77 36

Ø38 80

Options

SLO_T4_D45 - LEDMODULE T4
TR127040 - DRIVER

Ref cat (STD)

ZITA35C.1	CW NW WW
ZITA35C.1M	CW NW WW
ZITA35C.2	CW NW WW
ZITA35C.2M	CW NW WW
ZITA35C.4	CW NW WW
ZITA35C.11	CW NW WW
ZITA35C.13	CW NW WW
ZITA35C.14	CW NW WW
ZITA35C.16	CW NW WW
ZITA35C.23	CW NW WW

built-in

ZITA35CG/.. - ZITA SLO -T3

=350mA S2 0,5 m



downlight - square - without LED driver
Einbaustrahler - viereckig - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

L54xB54xH71 36

Ø38 75

Options

SLO_T3_D45 - LEDMODULE T3
TR127040 - DRIVER

Ref cat (STD)

ZITA35CG.1	CW NW WW
ZITA35CG.1M	CW NW WW
ZITA35CG.2	CW NW WW
ZITA35CG.2M	CW NW WW
ZITA35CG.4	CW NW WW
ZITA35CG.11	CW NW WW
ZITA35CG.13	CW NW WW
ZITA35CG.14	CW NW WW
ZITA35CG.16	CW NW WW
ZITA35CG.23	CW NW WW

built-in

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

ZITA35P/.. - ZITA SLO - T4

=350mA    IP20     





downlight - round - without LED driver
Einbaustrahler - rund - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø41xH76  36
Ø38-39  80

Options

SLO_T4_D45 - LEDMODULE T4
TR127040 - DRIVER

Ref cat (STD)

ZITA35P.1	CW NW WW
ZITA35P.1M	CW NW WW
ZITA35P.2	CW NW WW
ZITA35P.2M	CW NW WW
ZITA35P.4	CW NW WW
ZITA35P.5	CW NW WW
ZITA35P.5B	CW NW WW
ZITA35P.11	CW NW WW
ZITA35P.13	CW NW WW
ZITA35P.14	CW NW WW
ZITA35P.16	CW NW WW
ZITA35P.23	CW NW WW

built-in

ZITA35M/.. - ZITA SLO - T3

=350mA    IP20     





downlight - round - without LED driver
Einbaustrahler - rund - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø44,5xH71  36
Ø39-40  75

Options







SLO_T3_D45 - LEDMODULE T3
TR127040 - DRIVER

Ref cat (STD)

ZITA35M.1	CW NW WW
ZITA35M.1M	CW NW WW
ZITA35M.2	CW NW WW
ZITA35M.2M	CW NW WW
ZITA35M.4	CW NW WW
ZITA35M.11	CW NW WW
ZITA35M.13	CW NW WW
ZITA35M.14	CW NW WW
ZITA35M.16	CW NW WW
ZITA35M.23	CW NW WW

built-in

ZITA35VT/.. - ZITA SLO - T3

=350mA    IP20      





downlight - round - without LED driver
Einbaustrahler - rund - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø52xH71  36
Ø39-40  75

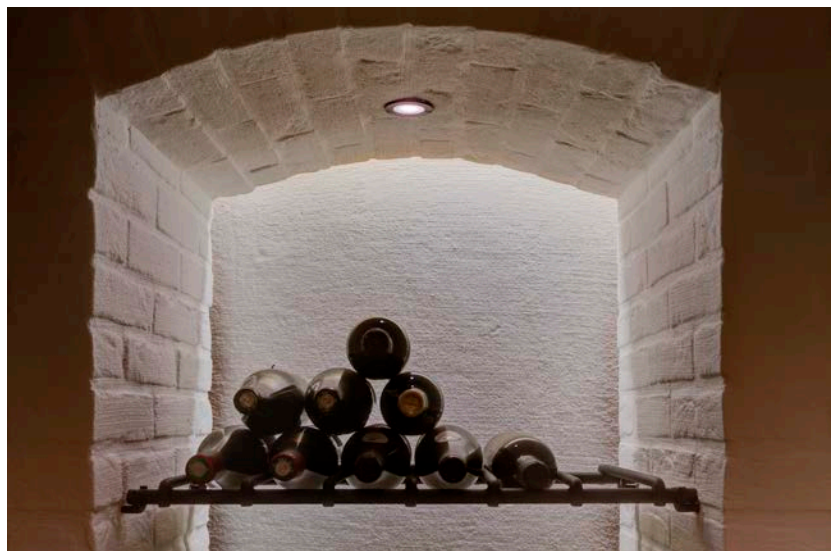
Options

SLO_T3_D45 - LEDMODULE T3
TR127040 - DRIVER

Ref cat (STD)

ZITA35VT.1	CW NW WW
ZITA35VT.1M	CW NW WW
ZITA35VT.2	CW NW WW
ZITA35VT.2M	CW NW WW
ZITA35VT.4	CW NW WW
ZITA35VT.11	CW NW WW
ZITA35VT.13	CW NW WW
ZITA35VT.14	CW NW WW
ZITA35VT.16	CW NW WW
ZITA35VT.23	CW NW WW

built-in



INDOOR | Ceiling IN | Ledmodules | ZITA

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

ZITA35V/.. - ZITA SLO - T2

=350mA    IP20     



downlight - round - twin wall - without LED driver
Einbaustrahler - rund - doppelwandig - ohne Driver LED

Lamptype

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø58xH65 \angle 36
Ø48 \angle 70

Options










SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

ZITA35.1	CW NW WW
ZITA35.1M	CW NW WW
ZITA35.2	CW NW WW
ZITA35.2M	CW NW WW
ZITA35.4	CW NW WW
ZITA35.11	CW NW WW
ZITA35.13	CW NW WW
ZITA35.14	CW NW WW
ZITA35.16	CW NW WW
ZITA35.23	CW NW WW

built-in

ZITA35V/.. - ZITA SLO - T2

=350mA    IP20      



downlight - round - twin wall - without LED driver
Einbaustrahler - rund - doppelwandig - ohne Driver LED

Lamptype

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø52xH65 \angle 36
Ø48 \angle 70

Options

SLO_T2_D15 - LEDMODULE T2
SLO_T2_D30 - LEDMODULE T2
SLO_T2_D45 - LEDMODULE T2
TR127040 - DRIVER

Ref cat (STD)

ZITA35V.1	CW NW WW
ZITA35V.1M	CW NW WW
ZITA35V.2	CW NW WW
ZITA35V.2M	CW NW WW
ZITA35V.4	CW NW WW
ZITA35V.11	CW NW WW
ZITA35V.13	CW NW WW
ZITA35V.14	CW NW WW
ZITA35V.16	CW NW WW
ZITA35V.23	CW NW WW

built-in



LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

SLO_T1_D15/.. - LEDMODULET1

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T1_D15

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 15

SLO_T1_D30/.. - LEDMODULET1

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref

SLO_T1_D30

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 30

SLO_T1_D36/.. - LEDMODULET1

=350mA IP20 0,1200 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T1_D36

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 36

SLO_T1_D45/.. - LEDMODULET1

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T1_D45

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 45

INDOOR | Ceiling IN | Ledmodules | ZITA

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

SLO_T2_D15/.. - LEDMODULET2

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T2_D15

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 15

SLO_T2_D30/.. - LEDMODULET2

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T2_D30

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 30

SLO_T2_D36/.. - LEDMODULET2

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T2_D36

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 36

SLO_T2_D45/.. - LEDMODULET2

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T2_D45

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 45

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

SLO_T3_D30/.. - LEDMODULET3

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T3_D30

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 30

SLO_T3_D45/.. - LEDMODULET3

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T3_D45

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH70 45

SLO_T4_D30/.. - LEDMODULET4

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T4_D30

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 30

SLO_T4_D45/.. - LEDMODULET4

=350mA IP20 0,5 m 05.20.50



LED module - lens - without LED driver
LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

SLO_T4_D45

CW | NW | WW

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø35xH65 45

INDOOR | Ceiling IN | Ledmodules | ZITA

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW)

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW)

FOCUS.SLO/.. - Ø49 SLO - T1

=350mA



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø59xH69 \triangle 36

Ø49 \triangle 79

Options

S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D36 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

FOCUS.SLO.1	CW NW WW
FOCUS.SLO.1M	CW NW WW
FOCUS.SLO.2	CW NW WW
FOCUS.SLO.2M	CW NW WW
FOCUS.SLO.4	CW NW WW
FOCUS.SLO.11	CW NW WW
FOCUS.SLO.13	CW NW WW
FOCUS.SLO.14	CW NW WW
FOCUS.SLO.16	CW NW WW
FOCUS.SLO.23	CW NW WW

built-in

ARCA.SLO/.. - Ø60 SLO - T1

=350mA



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø72xH69 \triangle 36

Ø60 \triangle 80

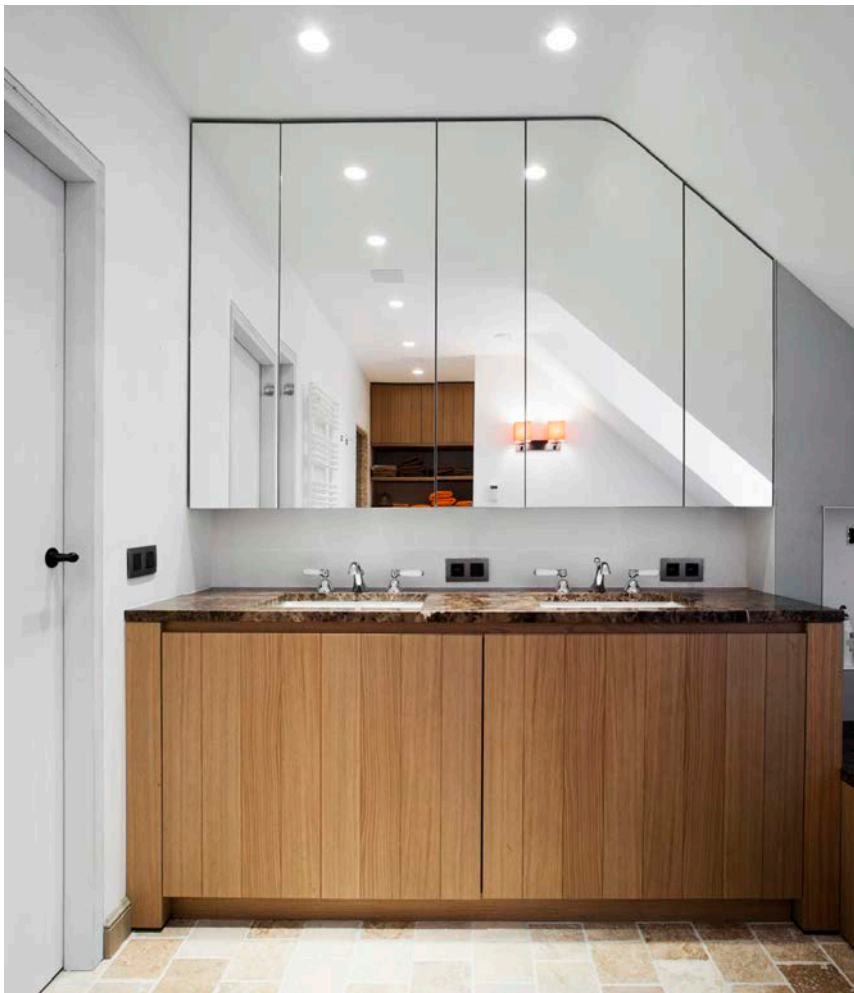
Options

S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

ARCA.SLO.1	CW NW WW
ARCA.SLO.1M	CW NW WW
ARCA.SLO.2	CW NW WW
ARCA.SLO.2M	CW NW WW
ARCA.SLO.4	CW NW WW
ARCA.SLO.11	CW NW WW
ARCA.SLO.13	CW NW WW
ARCA.SLO.14	CW NW WW
ARCA.SLO.16	CW NW WW
ARCA.SLO.23	CW NW WW

built-in



LED colors: natural white 4000K (NW) - warm white 2800K (WW) - Other LED colors on request

LED-Farben: naturweiß 4000K (NW) - warmweiß 2800K (WW) - Andere LED-Farben auf Anfrage

1370/.. - FELIX

=700mA IP44 0,1100 0,5



downlight for veranda profiles - round - fixed - down - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - ohne Driver LED

Ref cat (STD)

1370.1M	NW WW
1370.2M	NW WW
1370.14	NW WW
1370.24	NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

Ø44xH38 40° reflector
 Ø40 50

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
other °angle reflector on request
andere °Winkel Reflektor auf Anfrage

1371/.. - FELIX

=700mA IP44 0,1950 0,5



downlight for veranda profiles - round - fixed - down - with optical lens in alu housing - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)

1371.1M	NW WW
1371.2M	NW WW
1371.14	NW WW
1371.24	NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

Ø44xH42 40° reflector
 Ø40 56

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
other °angle reflector on request
andere °Winkel Reflektor auf Anfrage

1372/.. - FELIX

=700mA IP44 0,1150 0,5



downlight for veranda profiles - round - fixed - down - with optical lens in plexi housing - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)

1372.1M	NW WW
1372.2M	NW WW
1372.14	NW WW
1372.24	NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

Ø44xH44 40° reflector
 Ø40 58

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
other °angle reflector on demand - IP54 with closed plexi on request
andere °Winkel Reflektor auf Anfrage - IP54 mit geschlossenem Plexi auf Anfrage

1374/.. - FELIX

=700mA IP44 0,1100 0,5



downlight for veranda profiles - square - fixed - down - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - ohne Driver LED

Ref cat (STD)

1374.1M	NW WW
1374.2M	NW WW
1374.14	NW WW
1374.24	NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

L44xB44xH38 40° reflector
 Ø40 50

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
other °angle reflector on request
andere °Winkel Reflektor auf Anfrage

INDOOR | Ceiling IN | Ledmodules | FELIX

LED colors: natural white 4000K (NW) - warm white 2800K (WW) - Other LED colors on request

LED-Farben: naturweiß 4000K (NW) - warmweiß 2800K (WW) - Andere LED-Farben auf Anfrage

1375/.. - FELIX

=700mA    IP44     






downlight for veranda profiles - square - fixed - down - with optical lens in alu housing - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - mit optischer Linse in einem alu Gehäuse - ohne Driver LED





Ref cat (STD)

1375.1M	NW WW
1375.2M	NW WW
1375.14	NW WW
1375.24	NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 L44xB44xH42  40° reflector
 Ø40  L 56

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
other °angle reflector on request
andere °Winkel Reflektor auf Anfrage

1376/.. - FELIX

=700mA    IP44     






downlight for veranda profiles - square - fixed - down - with optical lens in plexi housing - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED





Ref cat (STD)

1376.1M	NW WW
1376.2M	NW WW
1376.14	NW WW
1376.24	NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions









 L44xB44xH44  40° reflector
 Ø40  L 58

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
other °angle reflector on demand - IP54 with closed plexi on request
andere °Winkel Reflektor auf Anfrage - IP54 mit geschlossenem Plexi auf Anfrage

W1370/.. - FELIX

=700mA    IP44    0,1300  0,5  






downlight for veranda profiles - round - fixed - down - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - ohne Driver LED





Ref cat (STD)

W1370.31MA	NW WW
W1370.32A	NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 Ø44xH38  40° reflector
 Ø40  L 50

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
with encapsulated cable 1,5m - other °angle reflector on request
mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage

W1371/.. - FELIX

=700mA    IP44    0,5  






downlight for veranda profiles - round - fixed - down - with optical lens in alu housing - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - mit optischer Linse in einem alu Gehäuse - ohne Driver LED


Ref cat (STD)

W1371.31MA	NW WW
------------	---------

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 Ø44xH42  40° reflector
 Ø40  L 56

Options

TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
with encapsulated cable 1,5m - other °angle reflector on request
mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage

LED colors: natural white 4000K (NW) - warm white 2800K (WW) - Other LED colors on request

LED-Farben: naturweiß 4000K (NW) - warmweiß 2800K (WW) - Andere LED-Farben auf Anfrage

W1372/.. - FELIX

=700mA IP44 0,1300 0,5 05.20.50



downlight for veranda profiles - round - fixed - down - with optical lens in plexi housing - without LED driver
Einbaustrahler für Verandaprofilen - rund - fest - down - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1372.31MA NW | WW
W1372.36A NW | WW

Lamp type
1x powered 700mA max. 3W - 700mA

Dimensions
Ø44xH44 40° reflector
Ø40 58

Options
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
with encapsulated cable 1,5m - other °angle reflector on demand - IP65 with closed plexi on request mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage - IP65 mit geschlossenem Plexi auf Anfrage

W1374/.. - FELIX

=700mA IP44 0,5 05.20.50



downlight for veranda profiles - square - fixed - down - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - ohne Driver LED

Ref cat (STD)
W1374.31MA NW | WW

Lamp type
1x powered 700mA max. 3W - 700mA

Dimensions
L44xB44xH38 40° reflector
Ø40 50

Options
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
with encapsulated cable 1,5m - other °angle reflector on request mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage

W1375/.. - FELIX

=700mA IP44 0,5 05.20.50



downlight for veranda profiles - square - fixed - down - with optical lens in alu housing - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)
W1375.31MA NW
W1375.36A NW

Lamp type
1x powered 700mA max. 3W - 700mA

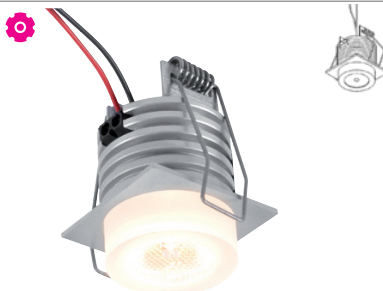
Dimensions
L44xB44xH42 40° reflector
Ø40 56

Options
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
with encapsulated cable 1,5m - other °angle reflector on request mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage

W1376/.. - FELIX

=700mA IP44 0,1350 0,5 05.20.50



downlight for veranda profiles - square - fixed - down - with optical lens in plexi housing - without LED driver
Einbaustrahler für Verandaprofilen - viereckig - fest - down - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1376.31MA NW | WW

Lamp type
1x powered 700mA max. 3W - 700mA

Dimensions
L44xB44xH44 40° reflector
Ø40 58

Options
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

semi built-in/up
with encapsulated cable 1,5m - other °angle reflector on demand - IP65 with closed plexi on request mit gekapselter Leitung 1,5m - andere °Winkel Reflektor auf Anfrage - IP65 mit geschlossenem Plexi auf Anfrage



Pluspunten Ziaveranda LED

- Grote afkoelingsring LED
- Gemakkelijk te vervangen LED - uitneembaar
- Gemakkelijk aan te sluiten
- Keuze tussen spring- of bladveren

Avantages Ziaveranda LED

- Anneau de refroidissement LED grand
- LED facile à remplacer - démontable
- Facile à connecter
- Choix entre lamelles ou ressorts à torsion

Advantages Ziaveranda LED

- Big cooling ring LED
- Easy to replace - LED can be taken out easily
- Easy to connect
- Choice between flat springs or torsion springs



Vorteile Ziaveranda mit LED

- Großer Kühlring LED
- LED einfach zu ersetzen - ausnehmbar
- Einfach anzuschließen
- Wahl zwischen Blattfeder oder Springfeder

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW) Other LED colors on request

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW) Andere LED-Farben auf Anfrage



ZIALEDM.S1/.. - Ø40 ZIA LED M

=350mA    S1 IP20    0,1200  0,5 m  05.20.50 



built-in ceiling and wall light - round - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - rund - fest - mit Led - ohne Driver LED

Ref cat (STD)	
ZIALEDM.S1.1M	NW WW
ZIALEDM.S1.2M	NW WW
ZIALEDM.S1.14	NW WW

Lamp type
1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
Ø48xH62  48° reflector
Ø40  72

Options
LTLED6CC.350mA - DRIVER constant current
S6.40 - PLASTERKIT

built-in
Ral color on demand
Ral Farbe auf Anfrage



ZIALEDM.S2/.. - Ø40 ZIA LED M

=350mA    S2 IP20    0,1500  0,5 m  05.20.50 



built-in ceiling and wall light - round - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - rund - fest - mit Led - ohne Driver LED

Ref cat (STD)	
ZIALEDM.S2.1M	NW WW
ZIALEDM.S2.2M	NW WW
ZIALEDM.S2.14	NW WW








Lamp type
1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
Ø48xH62  48° reflector
Ø40  72

Options
LTLED6CC.350mA - DRIVER constant current
S6.40 - PLASTERKIT

built-in
Ral color on demand
Ral Farbe auf Anfrage



ZIALEDMC.S1/.. - Ø40 ZIA LED M



=350mA    S1 IP20    0,1200  0,5 m  05.20.50 



built-in ceiling and wall light - square - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - fest - mit Led - ohne Driver LED

Ref cat (STD)	
ZIALEDMC.S1.1M	NW WW
ZIALEDMC.S1.2M	NW WW
ZIALEDMC.S1.14	NW WW







Lamp type
1x led 467lm CRI80 max. 3,8W  -  350mA

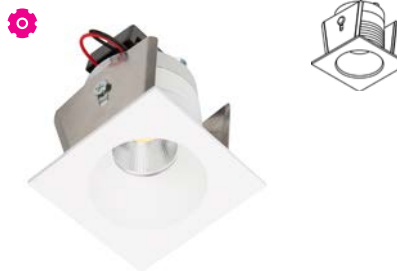
Dimensions
L48xB48xH62  48° reflector
Ø40  72

Options
LTLED6CC.350mA - DRIVER constant current
S6.40 - PLASTERKIT

built-in
Ral color on demand
Ral Farbe auf Anfrage



ZIALEDMC.S2/.. - Ø40 ZIA LED M

=350mA    S2 IP20    0,1100  0,5 m  05.20.50 



built-in ceiling and wall light - square - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - fest - mit Led - ohne Driver LED

Ref cat (STD)	
ZIALEDMC.S2.1M	NW WW
ZIALEDMC.S2.2M	NW WW
ZIALEDMC.S2.14	NW WW

Lamp type
1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions
L48xB48xH62  48° reflector
Ø40  72

Options
LTLED6CC.350mA - DRIVER constant current
S6.40 - PLASTERKIT

built-in
Ral color on demand
Ral Farbe auf Anfrage

INDOOR | Ceiling IN | Ledmodules | ZIA LED M

LED colors: cool white 4000K (CW) - warm white 2700K (WW) neutral white 3000K (NW) Other LED colors on request

LED-Farben: kühles Weiß 4000K (CW) - warmweiß 2700K (WW) neutral weiß 3000K (NW) Andere LED-Farben auf Anfrage

ZIALEDMIP44.S1/.. - ZIALEDMIP44.S1/..

=350mA



built-in ceiling and wall light - round - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - rund - fest - mit Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

Ø48xH62 48° reflector

Ø40 72

Options

LTLED6CC.350mA - DRIVER constant current

S6.40 - PLASTERKIT

Ref cat (STD)

ZIALEDMIP44.S1.1MA	NW WW
ZIALEDMIP44.S1.2MA	NW WW
ZIALEDMIP44.S1.11MA	NW WW
ZIALEDMIP44.S1.14	NW WW

built-in

Ral color on demand + glass protection - Color 14 not suitable for moist places

Ral Farbe auf Anfrage + Glass - Farbe 14 nicht für feuchte Umgebung

ZIALEDMIP44.S2/.. - Ø40 ZIA LED M IP44

=350mA



built-in ceiling and wall light - round - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - rund - fest - mit Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

Ø48xH62 48° reflector

Ø40 72

Options

LTLED6CC.350mA - DRIVER constant current

S6.40 - PLASTERKIT

Ref cat (STD)

ZIALEDMIP44.S2.1MA	NW WW
ZIALEDMIP44.S2.2MA	NW WW
ZIALEDMIP44.S2.11MA	NW WW
ZIALEDMIP44.S2.14	NW WW

built-in

Ral color on demand + glass protection - Color 14 not suitable for moist places

Ral Farbe auf Anfrage + Glass - Farbe 14 nicht für feuchte Umgebung

ZIALEDMCIP44.S1/.. - Ø40 ZIA LED M IP44

=350mA



built-in ceiling and wall light - square - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - fest - mit Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

L48xB48xH62 48° reflector

Ø40 72

Options

LTLED6CC.350mA - DRIVER constant current

S6.40 - PLASTERKIT

Ref cat (STD)

ZIALEDMCIP44.S1.1MA	NW WW
ZIALEDMCIP44.S1.2MA	NW WW
ZIALEDMCIP44.S1.11MA	NW WW
ZIALEDMCIP44.S1.14	NW WW

built-in

Ral color on demand + glass protection - Color 14 not suitable for moist places

Ral Farbe auf Anfrage + Glass - Farbe 14 nicht für feuchte Umgebung

ZIALEDMCIP44.S2/.. - Ø40 ZIA LED M IP44

=350mA



built-in ceiling and wall light - square - fixed - with led - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - fest - mit Led - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

L48xB48xH62 48° reflector

Ø40 72

Options

LTLED6CC.350mA - DRIVER constant current

S6.40 - PLASTERKIT

Ref cat (STD)

ZIALEDMCIP44.S2.1MA	NW WW
ZIALEDMCIP44.S2.2MA	NW WW
ZIALEDMCIP44.S2.11MA	NW WW
ZIALEDMCIP44.S2.14	NW WW

built-in

Ral color on demand + glass protection - Color 14 not suitable for moist places

Ral Farbe auf Anfrage + Glass - Farbe 14 nicht für feuchte Umgebung

LED colors: blue (B) - Cold white 6000K (CW) - warm white 3000K (NW/WW) - Other LED colors on request

LED-Farben: blau (B) - Kaltweiß 6000K (CW) - warmweiß 3000K (NW/WW) - Andere LED-Farben auf Anfrage

ZIALED/.. - Ø48

=700mA



built-in ceiling and wall light - without LED driver
Decken- und Wandleuchte für Einbau - ohne Driver LED

Lamp type

1x powered 700mA max. 3W **A+** - **A+** 700mA

Dimensions

Ø58,5xH64

Ø48 74

Options

LTLED1CC.350mA - DRIVER constant current

S6.50 - PLASTERKIT

Ref cat (STD)

ZIALED.11M.B

B | CW | WW

ZIALED.14.B

B | CW | WW

built-in
clear glass + reflector on request
helles Glas + Reflektor auf Anfrage

ZIALED.230V/.. - Ø48

~230V



built-in ceiling and wall light - round
Decken- und Wandleuchte für Einbau - rund

Lamp type

1x Led 400lm CRI80 max. 4W **A+** 230V

Dimensions

Ø58,5xH64

Ø48 74

Options

S6.50 - PLASTERKIT

Ref cat (STD)

ZIALED.230V.1M

NW

ZIALED.230V.1MA

NW

ZIALED.230V.2M

NW

ZIALED.230V.2MA

NW

ZIALED.230V.11M

NW

ZIALED.230V.11MA

NW

ZIALED.230V.14

NW

built-in
dimmable phase-cut
dimmbar Phasenabschnitt



INDOOR | Ceiling IN | Ledmodules | CESAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

1354.S1/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit Klemmenleiste - ohne Driver LED

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70x B70x H17

Ø60 \sphericalangle 45

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

Ref cat (STD)

1354.S1.1M CW | NW | WW

1354.S1.2M CW | NW | WW

1354.S1.14 CW | NW | WW

1354.S1.24 CW | NW | WW

built-in especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

1354.S2/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit Klemmenleiste - ohne Driver LED

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70x B70x H17

Ø60 \sphericalangle 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

Ref cat (STD)

1354.S2.1M CW | NW | WW

1354.S2.2M CW | NW | WW

1354.S2.14 CW | NW | WW

1354.S2.24 CW | NW | WW

built-in especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

1355.S1/.. - CESAR

=700mA



built-in ceiling and wall light - round - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit Klemmenleiste - ohne Driver LED

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

Ø70x H17

Ø60 \sphericalangle 45

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

Ref cat (STD)

1355.S1.1M CW | NW | WW

1355.S1.2M CW | NW | WW

1355.S1.14 CW | NW | WW

1355.S1.24 CW | NW | WW

built-in especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

1355.S2/.. - CESAR

=700mA



built-in ceiling and wall light - round - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit Klemmenleiste - ohne Driver LED

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

Ø70x H17

Ø60 \sphericalangle 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

Ref cat (STD)

1355.S2.1M CW | NW | WW

1355.S2.2M CW | NW | WW

1355.S2.14 CW | NW | WW

1355.S2.24 CW | NW | WW

built-in especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen



1356.S1/.. - CESAR X

=700mA IP20 0,5 m



built-in ceiling and wall light - round - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)

1356.S1.1M	CW NW WW
1356.S1.2M	CW NW WW
1356.S1.14	CW NW WW
1356.S1.24	CW NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

Ø70xH17 40° reflector

Ø60 45

Optical lens -

Options

S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
for kitchen & bathroom cabinets and elevators
für Badezimmer- & Küchenschranken und Aufzügen

1356.S2/.. - CESAR X

=700mA IP20 0,5 m



built-in ceiling and wall light - round - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)

1356.S2.1M	CW NW WW
1356.S2.14	CW NW WW
1356.S2.24	CW NW WW

Lamp type

1x powered 700mA max. 3W - 700mA

Dimensions

Ø70xH17 40° reflector

Ø60 17,5

Optical lens -

Options

S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
for kitchen & bathroom cabinets and elevators
für Badezimmer- & Küchenschranken und Aufzügen


INDOOR | Ceiling IN | Ledmodules | CESAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

1357.S1/.. - CESAR X

=700mA



built-in ceiling and wall light - square - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)

1357.S1.1M	CW NW WW
1357.S1.2M	CW NW WW
1357.S1.14	CW NW WW
1357.S1.24	CW NW WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17 40° reflector

Ø60 45

Optical lens -

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER


TR122400 - MULTI DRIVER - TRANSFO

built-in

other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
for kitchen & bathroom cabinets and elevators
für Badezimmer- & Küchenschranken und Aufzügen

1357.S2/.. - CESAR X

=700mA



built-in ceiling and wall light - square - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)

1357.S2.1M	CW NW WW
1357.S2.2M	CW NW WW
1357.S2.14	CW NW WW
1357.S2.24	CW NW WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17 40° reflector

Ø60 17,5

Optical lens -

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in

other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
for kitchen & bathroom cabinets and elevators
für Badezimmer- & Küchenschranken und Aufzügen

1358.S1/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit Klemmenleiste - ohne Driver LED

Ref cat (STD)

1358.S1.1M	CW NW WW
1358.S1.2M	CW NW WW
1358.S1.14	CW NW WW
1358.S1.24	CW NW WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 45

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in

especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

1358.S2/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with terminal block - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit Klemmenleiste - ohne Driver LED

Ref cat (STD)

1358.S2.1M	CW NW WW
1358.S2.14	CW NW WW
1358.S2.24	CW NW WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO


built-in

especially for kitchen & bathroom cabinets and elevators
für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturrell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

1359.S1/.. - CESAR X

=700mA 



built-in especially for kitchen & bathroom cabinets and elevators für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

built-in ceiling and wall light - square - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)	
1359.S1.1M	CW NW WW
1359.S1.2M	CW NW WW
1359.S1.14	CW NW WW
1359.S1.24	CW NW WW

Lamp type
1x powered 700mA max. 3W A - A+ 700mA

Dimensions
L70x B70x H17 40° reflector
Ø60 45
Optical lens -

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

1359.S2/.. - CESAR X

=700mA 



built-in especially for kitchen & bathroom cabinets and elevators für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

built-in ceiling and wall light - square - down - connection with terminal block - with optical lens in alu housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem alu Gehäuse - ohne Driver LED

Ref cat (STD)	
1359.S2.1M	CW NW WW
1359.S2.2M	CW NW WW
1359.S2.14	CW NW WW
1359.S2.24	CW NW WW

Lamp type
1x powered 700mA max. 3W A - A+ 700mA

Dimensions
L70x B70x H17 40° reflector
Ø60 17,5
Optical lens -

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

1360.S1/.. - CESAR X

=700mA 



built-in other °angle reflector on demand andere °Winkel Reflektor auf Anfrage especially for kitchen & bathroom cabinets and elevators für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

built-in ceiling and wall light - round - down - connection with terminal block - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)	
1360.S1.1M	CW NW WW
1360.S1.2M	CW NW WW
1360.S1.14	CW NW WW
1360.S1.24	CW NW WW

Lamp type
1x powered 700mA max. 3W A - A+ 700mA

Dimensions
Ø70x H17 40° reflector
Ø60 45
Optical lens -

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

1360.S2/.. - CESAR X

=700mA 



built-in other °angle reflector on demand andere °Winkel Reflektor auf Anfrage especially for kitchen & bathroom cabinets and elevators für Anwendung in Badezimmer- & Küchenschranken und Aufzügen

built-in ceiling and wall light - round - down - connection with terminal block - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - down - Anschluss mit Klemmenleiste - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)	
1360.S2.1M	CW NW WW
1360.S2.2M	CW NW WW
1360.S2.14	CW NW WW
1360.S2.24	CW NW WW

Lamp type
1x powered 700mA max. 3W A - A+ 700mA

Dimensions
Ø70x H17 40° reflector
Ø60 17,5
Optical lens -

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

INDOOR | Ceiling IN | Ledmodules | CESAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

1361.S1/.. - CESAR X

=700mA     IP20      






built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
especially for kitchen & bathroom cabinets and
elevators
für Anwendung in Badezimmer- & Küchenschranken
und Aufzügen

built-in ceiling and wall light - square - down - connection
with terminal block - with optical lens in plexi housing -
without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down -
Anschluss mit Klemmenleiste - mit optischer Linse in einem
plexi Gehäuse - ohne Driver LED



Ref cat (STD)

1361.S1.1M	CW NW WW
1361.S1.2M	CW NW WW
1361.S1.14	CW NW WW
1361.S1.24	CW NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 L70xB70xH17  40° reflector

 Ø60  45

Optical lens -

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

1361.S2/.. - CESAR X

=700mA     IP20      






built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
especially for kitchen & bathroom cabinets and
elevators
für Anwendung in Badezimmer- & Küchenschranken
und Aufzügen

built-in ceiling and wall light - square - down - connection
with terminal block - with optical lens in plexi housing -
without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down -
Anschluss mit Klemmenleiste - mit optischer Linse in einem
plexi Gehäuse - ohne Driver LED



Ref cat (STD)



1361.S2.1M	CW NW WW
1361.S2.2M	CW NW WW
1361.S2.14	CW NW WW
1361.S2.24	CW NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 L70xB70xH17  40° reflector

 Ø60  17,5

Optical lens -

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

1362.S1/.. - CESAR X

=700mA     IP20     






built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
especially for kitchen & bathroom cabinets and
elevators
für Anwendung in Badezimmer- & Küchenschranken
und Aufzügen

built-in ceiling and wall light - square - down - connection
with terminal block - with optical lens in plexi housing -
without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down -
Anschluss mit Klemmenleiste - mit optischer Linse in einem
plexi Gehäuse - ohne Driver LED

Ref cat (STD)



1362.S1.1M	CW NW WW
1362.S1.2M	CW NW WW
1362.S1.14	CW NW WW
1362.S1.24	CW NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 L70xB70xH17  40° reflector

 Ø60  45

Optical lens -









Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

1362.S2/.. - CESAR X

=700mA     IP20      






built-in
other °angle reflector on demand
andere °Winkel Reflektor auf Anfrage
especially for kitchen & bathroom cabinets and
elevators
für Anwendung in Badezimmer- & Küchenschranken
und Aufzügen

built-in ceiling and wall light - square - down - connection
with terminal block - with optical lens in plexi housing -
without LED driver
Decken- und Wandleuchte für Einbau - viereckig - down -
Anschluss mit Klemmenleiste - mit optischer Linse in einem
plexi Gehäuse - ohne Driver LED



Ref cat (STD)



1362.S2.1M	CW NW WW
1362.S2.2M	CW NW WW
1362.S2.14	CW NW WW
1362.S2.24	CW NW WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

 L70xB70xH17  40° reflector

 Ø60  17,5

Optical lens -

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

1365/.. - CESAR

IP20    



built-up base for downlight
Aufbaubase für Einbaustrahler

Dimensions

↔ Ø75xH24,5

Materials




aluminium 14 | 1M | 2M

Ref cat (STD)

1365.1M	white tex
1365.2M	black tex
1365.14	alu satin
1365.24	alu sandblasted

built-up
to combine with cesar recessed round
zu kombinieren mit cesar Einbau rund

1366/.. - CESAR

IP20    



built-up base for downlight - square
Aufbaubase für Einbaustrahler - viereckig

Dimensions

↔ L75xB75xH24,5

Materials

aluminium 14 | 1M | 24 | 2M

Ref cat (STD)

1366.1M	white tex
1366.2M	black tex
1366.14	alu satin
1366.24	alu sandblasted

built-up
to combine with cesar recessed square
zu kombinieren mit cesar Einbau quadratisch

W1354.S1/.. - CESAR

=700mA     IP54      






built-in ceiling and wall light - square - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)

W1354.S1.37A CW | NW | WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

↔ L70xB70xH17

 Ø60  J 45

Options

S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1354.S2/.. - CESAR

=700mA     IP54      






built-in ceiling and wall light - square - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)



W1354.S2.37A CW | NW | WW

Lamp type

 1x powered 700mA max. 3W  -  700mA

Dimensions

↔ L70xB70xH17

 Ø60  J 17,5

Options

S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

INDOOR | Ceiling IN | Ledmodules | CESAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W1355.S1/.. - CESAR

=700mA



built-in ceiling and wall light - round - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)

W1355.S1.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

Ø70xH17

Ø60 L 45

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
for cooker hoods - bathrooms - showers - elevators
für Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1355.S2/.. - CESAR

=700mA



built-in ceiling and wall light - round - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)

W1355.S2.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

Ø70xH17

Ø60 L 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1358.S1/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)

W1358.S1.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 L 45

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1358.S2/.. - CESAR

=700mA



built-in ceiling and wall light - square - connection with 1,5m cable - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - ohne Driver LED

Ref cat (STD)

W1358.S2.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 L 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W1360.S1/.. - CESAR X

=700mA IP54



built-in ceiling and wall light - round - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1360.S1.37A CW | NW | WW

Lamp type
 1x powered 700mA max. 3W - 700mA

Dimensions
 Ø70xH17
 Ø60 45

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmer - Duschen - Aufzügen

W1360.S2/.. - CESAR X

=700mA IP54



built-in ceiling and wall light - round - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - rund - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1360.S2.37A CW | NW | WW

Lamp type
 1x powered 700mA max. 3W - 700mA

Dimensions
 Ø70xH17
 Ø60 17,5

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmer - Duschen - Aufzügen

W1361.S1/.. - CESAR X

=700mA IP54



built-in ceiling and wall light - square - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1361.S1.37A CW | NW | WW

Lamp type
 1x powered 700mA max. 3W - 700mA

Dimensions
 L70xB70xH17
 Ø60 45

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmer - Duschen - Aufzügen

W1361.S2/.. - CESAR X

=700mA IP54



built-in ceiling and wall light - square - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)
W1361.S2.37A CW | NW | WW

Lamp type
 1x powered 700mA max. 3W - 700mA

Dimensions
 L70xB70xH17
 Ø60 17,5

Options
S6.60 - PLASTERKIT
TR122234 - DRIVER
TR122400 - MULTI DRIVER - TRANSFO

built-in especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmer - Duschen - Aufzügen

INDOOR | Ceiling IN | Ledmodules | CESAR

LED colors: cold white 6500K (CW) - natural white 4000K (NW) - warm white 2800K (WW) - other LED colors on request

LED Farben: kalt Weiß 6500K (CW) - naturrell Weiß 4000K (NW) - warm Weiß 2800K (WW) - andere LED Farben auf Anfrage

W1362.S1/.. - CESAR X

=700mA



built-in ceiling and wall light - square - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)

W1362.S1.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 \perp 45

Options

S6.60 - PLASTERKIT


TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1362.S2/.. - CESAR X

=700mA



built-in ceiling and wall light - square - connection with 1,5 m cable - with optical lens in plexi housing - without LED driver
Decken- und Wandleuchte für Einbau - viereckig - Anschluss mit 1,5m Kabel - mit optischer Linse in einem plexi Gehäuse - ohne Driver LED

Ref cat (STD)

W1362.S2.37A

CW | NW | WW

Lamp type

1x powered 700mA max. 3W A - A+ 700mA

Dimensions

L70xB70xH17

Ø60 \perp 17,5

Options

S6.60 - PLASTERKIT

TR122234 - DRIVER

TR122400 - MULTI DRIVER - TRANSFO

built-in
especially for cooker hoods - bathrooms - showers - elevators
für Anwendung in Dunstabzugshauben - Badezimmern - Duschen - Aufzügen

W1365/.. - CESAR

IP20



built-up base for downlight
Aufbaubase für Einbaustrahler

Ref cat (STD)

W1365.37A

grey text ano

Dimensions

Ø75xH24,5


Materials

ALU ANODISE 37A

built-up
to combine with cesar recessed round
zu kombinieren mit cesar Einbau rund

W1366/.. - CESAR

IP20



built-up base for downlight - square
Aufbaubase für Einbaustrahler - viereckig

Ref cat (STD)

W1366.37A

grey text ano

Dimensions

L75xB75xH24,5

Materials

ALU ANODISE 37A

built-up
to combine with cesar recessed square
zu kombinieren mit cesar Einbau quadratisch

PICO.SLO/.. - Ø65 SLO - T1

=350mA    IP20      



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø75xH69 Δ 36
Ø65 Δ 75

Options

S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER


Ref cat (STD)

PICO.SLO.1	CW NW WW
PICO.SLO.1M	CW NW WW
PICO.SLO.2	CW NW WW
PICO.SLO.2M	CW NW WW
PICO.SLO.4	CW NW WW
PICO.SLO.11	CW NW WW
PICO.SLO.13	CW NW WW
PICO.SLO.14	CW NW WW
PICO.SLO.16	CW NW WW
PICO.SLO.23	CW NW WW
PICO.SLO.45	CW NW WW

built-in

PICOOUT.SLO/.. - Ø65 SLO - T1

=350mA    IP20     



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø75xH69 Δ 36
Ø65 Δ 75

Options

S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref

PICOOUT.SLO.5	CW NW WW
PICOOUT.SLO.5B	CW NW WW
PICOOUT.SLO.5BB	CW NW WW
PICOOUT.SLO.20	CW NW WW
PICOOUT.SLO.31MX	CW NW WW
PICOOUT.SLO.32X	CW NW WW

built-in

PICODOWN.SLO/.. - Ø65 SLO - T1

=350mA    IP20     



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

Ø75xH84 Δ 36
Ø65 Δ 90

Options

S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

PICODOWN.SLO.1	CW NW WW
PICODOWN.SLO.1M	CW NW WW
PICODOWN.SLO.2	CW NW WW
PICODOWN.SLO.2M	CW NW WW
PICODOWN.SLO.4	CW NW WW
PICODOWN.SLO.11	CW NW WW
PICODOWN.SLO.13	CW NW WW
PICODOWN.SLO.14	CW NW WW
PICODOWN.SLO.16	CW NW WW
PICODOWN.SLO.23	CW NW WW
PICODOWN.SLO.45	CW NW WW

built-in

DIVA.SLO/.. - Ø65 SLO - T1

=350mA    IP20      



downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type
1x LED 735lm CRI90 max. 6W 350mA

Dimensions
Ø75xH75 Δ 36
Ø65 \sphericalangle 80

Options
S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER


Ref cat (STD)

DIVA.SLO.1	CW	NW	WW
DIVA.SLO.1M	CW	NW	WW
DIVA.SLO.2	CW	NW	WW
DIVA.SLO.2M	CW	NW	WW
DIVA.SLO.4	CW	NW	WW
DIVA.SLO.11	CW	NW	WW
DIVA.SLO.13	CW	NW	WW
DIVA.SLO.14	CW	NW	WW
DIVA.SLO.16	CW	NW	WW
DIVA.SLO.23	CW	NW	WW
DIVA.SLO.45	CW	NW	WW

built-in

DIVAOUT.SLO/.. - Ø65 SLO - T1

=350mA    IP20      



downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type
1x LED 735lm CRI90 max. 6W 350mA

Dimensions
Ø75xH75 Δ 36
Ø65 \sphericalangle 80

Options
S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref

DIVAOUT.SLO.5	CW	NW	WW
DIVAOUT.SLO.5B	CW	NW	WW
DIVAOUT.SLO.5BB	CW	NW	WW
DIVAOUT.SLO.20	CW	NW	WW
DIVAOUT.SLO.31MX	CW	NW	WW
DIVAOUT.SLO.32X	CW	NW	WW

built-in

CANO.SLO/.. - Ø65 SLO - T1

=350mA    IP20     



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type
1x LED 735lm CRI90 max. 6W 350mA

Dimensions
Ø75xH55 Δ 36
Ø65 \sphericalangle 75

Options
S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

CANO.SLO.1	CW	NW	WW
CANO.SLO.1M	CW	NW	WW
CANO.SLO.2	CW	NW	WW
CANO.SLO.2M	CW	NW	WW
CANO.SLO.4	CW	NW	WW
CANO.SLO.11	CW	NW	WW
CANO.SLO.13	CW	NW	WW
CANO.SLO.14	CW	NW	WW
CANO.SLO.16	CW	NW	WW
CANO.SLO.23	CW	NW	WW
CANO.SLO.45	CW	NW	WW

semi built-in/up

SIRA.SLO/.. - Ø65 SLO - T1

=350mA    IP20     



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type
1x LED 735lm CRI90 max. 6W 350mA

Dimensions
Ø75xH92
Ø65 \sphericalangle 100

Options
S1 - SET TORSION SPRINGS
SLO_T1_D15 - LEDMODULE T1
SLO_T1_D30 - LEDMODULE T1
SLO_T1_D45 - LEDMODULE T1
TR127040 - DRIVER

Ref cat (STD)

SIRA.SLO.1M	CW	NW	WW
SIRA.SLO.2M	CW	NW	WW
SIRA.SLO.14	CW	NW	WW
SIRA.SLO.45	CW	NW	WW

built-in



VARIO.SLO/.. - Ø65 SLO - T1

=350mA IP20 0,5 m



downlight - square - directional - without LED driver
Einbaustrahler - viereckig - schwenkbar - ohne Driver LED

Lamp type

1x LED 735lm CRI90 max. 6W 350mA

Dimensions

L87xB87xH65

Ø65 75

Options

- S1 - SET TORSION SPRINGS
- SLO_T1_D15 - LEDMODULE T1
- SLO_T1_D30 - LEDMODULE T1
- SLO_T1_D45 - LEDMODULE T1
- TR127040 - DRIVER

Ref cat (STD)

VARIO.SLO.1	CW NW WW
VARIO.SLO.1M	CW NW WW
VARIO.SLO.2	CW NW WW
VARIO.SLO.2M	CW NW WW
VARIO.SLO.11	CW NW WW
VARIO.SLO.14	CW NW WW

built-in

VARIO2.SLO/.. - Ø65 SLO - T1

=350mA IP20 0,5 m



downlight - square - directional - without LED driver
Einbaustrahler - viereckig - schwenkbar - ohne Driver LED

Lamp type

2x LED 735lm CRI90 max. 6W 350mA

Dimensions

L162xB87xH65

2xØ65 75 [78]

Options

- S1 - SET TORSION SPRINGS
- SLO_T1_D15 - LEDMODULE T1
- SLO_T1_D30 - LEDMODULE T1
- SLO_T1_D45 - LEDMODULE T1
- TR127040 - DRIVER

Ref cat (STD)

VARIO2.SLO.1	CW NW WW
VARIO2.SLO.1M	CW NW WW
VARIO2.SLO.2	CW NW WW
VARIO2.SLO.2M	CW NW WW
VARIO2.SLO.11	CW NW WW
VARIO2.SLO.14	CW NW WW

built-in





1170.70.S1/.. - PIVOT

=350mA     S1 IP20    0,3600 0,5 m 05.20.50 





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

Ø87xH125  48° reflector
Ø80  100

Ref cat (STD)

1170.70.S1.1M	NW WW
1170.70.S1.2M	NW WW
1170.70.S1.29	NW WW
1170.70.S1.49	NW WW

semi built-in/up



1170.70.S2/.. - PIVOT

=350mA     S2 IP20    0,3300 0,5 m 05.20.50 





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

Ø87xH125  48° reflector
Ø80  100

Ref cat (STD)

1170.70.S2.1M	NW WW
1170.70.S2.2M	NW WW
1170.70.S2.29	NW WW
1170.70.S2.49	NW WW

semi built-in/up



1170.150.S1/.. - PIVOT

=350mA     S1 IP20    0,4600 0,5 m 05.20.50 





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

Ø87xH205  48° reflector
Ø80  100

Ref cat (STD)

1170.150.S1.1M	NW WW
1170.150.S1.2M	NW WW
1170.150.S1.29	NW WW
1170.150.S1.49	NW WW

semi built-in/up



1170.150.S2/.. - PIVOT

=350mA     S2 IP20    0,3900 0,5 m 05.20.50 





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

Ø87xH205  48° reflector
Ø80  100

Ref cat (STD)

1170.150.S2.1M	NW WW
1170.150.S2.2M	NW WW
1170.150.S2.29	NW WW
1170.150.S2.49	NW WW

semi built-in/up




1170.200.S1/.. - PIVOT

=350mA    IP20     0,5800  0,5 m  05.20.50 







downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 Ø87xH255  48° reflector
 Ø80  100

Ref cat (STD)

1170.200.S1.1M	NW WW
1170.200.S1.2M	NW WW
1170.200.S1.29	NW WW
1170.200.S1.49	NW WW

semi built-in/up




1170.200.S2/.. - PIVOT

=350mA    IP20     0,4200  0,5 m  05.20.50 







downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions

 Ø87xH255  48° reflector
 Ø80  100

Ref cat (STD)

1170.200.S2.1M	NW WW
1170.200.S2.2M	NW WW
1170.200.S2.29	NW WW
1170.200.S2.49	NW WW

semi built-in/up




1170.250.S1/.. - PIVOT

=350mA    IP20     0,6200  0,5 m  05.20.50 




downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions










 Ø87xH305  48° reflector
 Ø80  100

Ref cat (STD)

1170.250.S1.1M	NW WW
1170.250.S1.2M	NW WW
1170.250.S1.29	NW WW
1170.250.S1.49	NW WW

semi built-in/up




1170.250.S2/.. - PIVOT

=350mA    IP20     0,5 m  05.20.50 



downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

 1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions



 Ø87xH305  48° reflector
 Ø80  100

Ref cat (STD)

1170.250.S2.1M	NW WW
1170.250.S2.2M	NW WW
1170.250.S2.29	NW WW
1170.250.S2.49	NW WW

semi built-in/up



1170.300.S1/.. - PIVOT

=350mA    S1 IP20    0,5 m  





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

Dimensions









Ø87xH355  48° reflector
Ø80  100

Ref cat (STD)

1170.300.S1.1M	NW WW
1170.300.S1.2M	NW WW
1170.300.S1.29	NW WW
1170.300.S1.49	NW WW

semi built-in/up



1170.300.S2/.. - PIVOT

=350mA    S2 IP20    0,5 m  





downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type

1x led 467lm CRI80 max. 3,8W  -  350mA

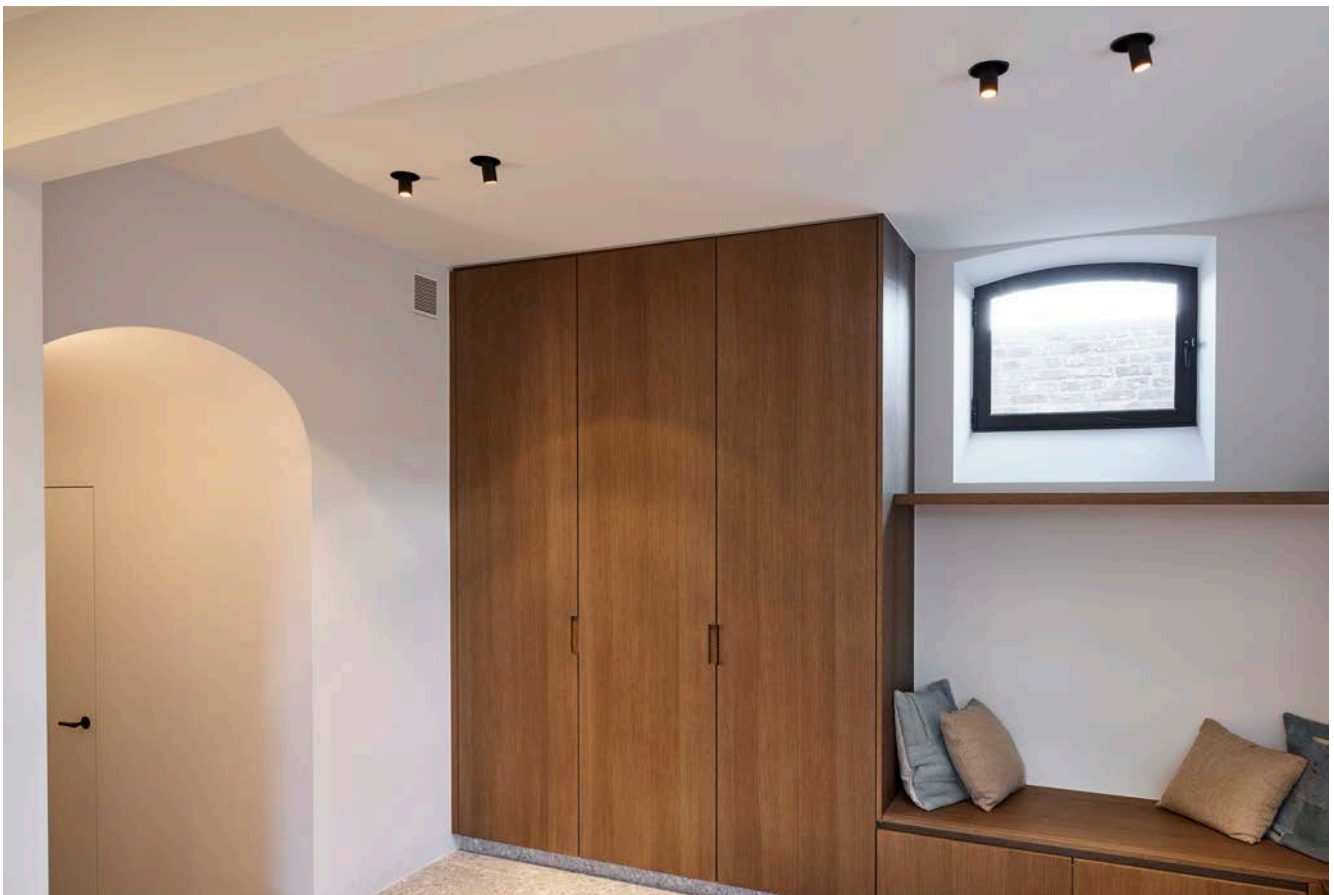
Dimensions

Ø87xH355  48° reflector
Ø80  100

Ref cat (STD)


1170.300.S2.1M	NW WW
1170.300.S2.2M	NW WW
1170.300.S2.29	NW WW
1170.300.S2.49	NW WW

semi built-in/up



DC.1200.10024/.. - NORA DC

=350mA IP20 0,3100 0,5 m 05.20.50



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø80xH75 38° reflector

70 85

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10024.1	NW WW
DC.1200.10024.1M	NW WW
DC.1200.10024.2	NW WW
DC.1200.10024.2M	NW WW
DC.1200.10024.4	NW WW
DC.1200.10024.11	NW WW
DC.1200.10024.13	NW WW
DC.1200.10024.14	NW WW
DC.1200.10024.16	NW WW
DC.1200.10024.21	NW WW
DC.1200.10024.23	NW WW
DC.1200.10024.45	NW WW

built-in

DC.1200.10026/.. - NORA DC

=350mA IP20 0,3100 0,5 m 05.20.50



downlight - round - directional - LED module - lens - without LED driver
Einbaustrahler - rund - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø80xH90 36° reflector

70 100

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10026.1	NW WW
DC.1200.10026.1M	NW WW
DC.1200.10026.2	NW WW
DC.1200.10026.2M	NW WW
DC.1200.10026.4	NW WW
DC.1200.10026.11	NW WW
DC.1200.10026.13	NW WW
DC.1200.10026.14	NW WW
DC.1200.10026.16	NW WW
DC.1200.10026.21	NW WW
DC.1200.10026.23	NW WW
DC.1200.10026.45	NW WW

built-in

DC.1200.10028/.. - NORA DC

=350mA IP20 0,3100 0,5 m 05.20.50



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø80xH90 38° reflector

70 100

Options







S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10028.1	NW WW
DC.1200.10028.1M	NW WW
DC.1200.10028.2	NW WW
DC.1200.10028.2M	NW WW
DC.1200.10028.4	NW WW
DC.1200.10028.11	NW WW
DC.1200.10028.13	NW WW
DC.1200.10028.14	NW WW
DC.1200.10028.16	NW WW
DC.1200.10028.21	NW WW
DC.1200.10028.23	NW WW
DC.1200.10028.45	NW WW

built-in

DC.1200.10025/.. - NORA DC

=350mA    IP20     





downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED





Ref cat (STD)

DC.1200.10025.1M	NW WW
DC.1200.10025.2M	NW WW
DC.1200.10025.14	NW WW

Lamp type

 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions









 L80xB80xH75  36° reflector
 70  85

Options

S1 - SET TORSION SPRINGS

built-in

DC.1200.10027/.. - NORA DC

=350mA    IP20     





downlight - square - directional - LED module - lens - without LED driver
 Einbaustrahler - viereckig - schwenkbar - LED Modul - Objektiv - ohne Driver LED





Ref cat (STD)

DC.1200.10027.1M	NW WW
DC.1200.10027.2M	NW WW
DC.1200.10027.14	NW WW

Lamp type

 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions



 L80xB80xH90  36° reflector
 70  100

Options

S1 - SET TORSION SPRINGS

built-in

DC.1200.10029/.. - NORA DC

=350mA    IP20     





downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED





Ref cat (STD)

DC.1200.10029.1M	NW WW
DC.1200.10029.2M	NW WW
DC.1200.10029.14	NW WW

Lamp type

 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions





 L80xB80xH90  36° reflector
 70  100

Options

S1 - SET TORSION SPRINGS

built-in


DC.1200.10010/.. - NORA DC

=350mA    IP20    






downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions

Ø89xH75  38° reflector

 80  85

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10010.1	NW WW
DC.1200.10010.1M	NW WW
DC.1200.10010.2	NW WW
DC.1200.10010.2M	NW WW
DC.1200.10010.4	NW WW
DC.1200.10010.11	NW WW
DC.1200.10010.13	NW WW
DC.1200.10010.14	NW WW
DC.1200.10010.16	NW WW
DC.1200.10010.21	NW WW
DC.1200.10010.23	NW WW
DC.1200.10010.45	NW WW

built-in


DC.1200.10011/.. - NORA DC

=350mA    IP20     






downlight - round - directional - LED module - lens - without LED driver
Einbaustrahler - rund - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions

Ø89xH80  36° reflector

 80  90

Options








S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10011.1	NW WW
DC.1200.10011.1M	NW WW
DC.1200.10011.2	NW WW
DC.1200.10011.2M	NW WW
DC.1200.10011.4	NW WW
DC.1200.10011.11	NW WW
DC.1200.10011.13	NW WW
DC.1200.10011.14	NW WW
DC.1200.10011.16	NW WW
DC.1200.10011.21	NW WW
DC.1200.10011.23	NW WW
DC.1200.10011.45	NW WW

built-in


DC.1200.10014/.. - NORA DC

=350mA    IP20    






downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions

Ø89xH85  36° reflector

 80  95

Options








S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10014.1M	NW WW
DC.1200.10014.2M	NW WW
DC.1200.10014.14	NW WW

built-in


DC.1200.10017/.. - NORA DC

=350mA    IP20    




downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions

Ø89xH90  36° reflector

 80  100

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.1200.10017.1M	NW WW
DC.1200.10017.2M	NW WW
DC.1200.10017.14	NW WW

built-in

DC.1200.10016/.. - NORA DC

=350mA IP20 0,5 m



downlight - round - fixed - LED module - lens - without LED driver
 Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

DC.1200.10016.1M	NW WW
DC.1200.10016.2M	NW WW
DC.1200.10016.14	NW WW

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø87xH115 36° reflector

80 DALI 125

Options

S1 - SET TORSION SPRINGS



built-in

DC.1200.10023/.. - NORA DC

=350mA IP20 0,5 m



downlight - round - fixed - LED module - lens - without LED driver
 Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

DC.1200.10023.1MA	NW WW
DC.1200.10023.2MA	NW WW
DC.1200.10023.11MA	NW WW

Lamp type

1x LED DC 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø89xH95 36° reflector

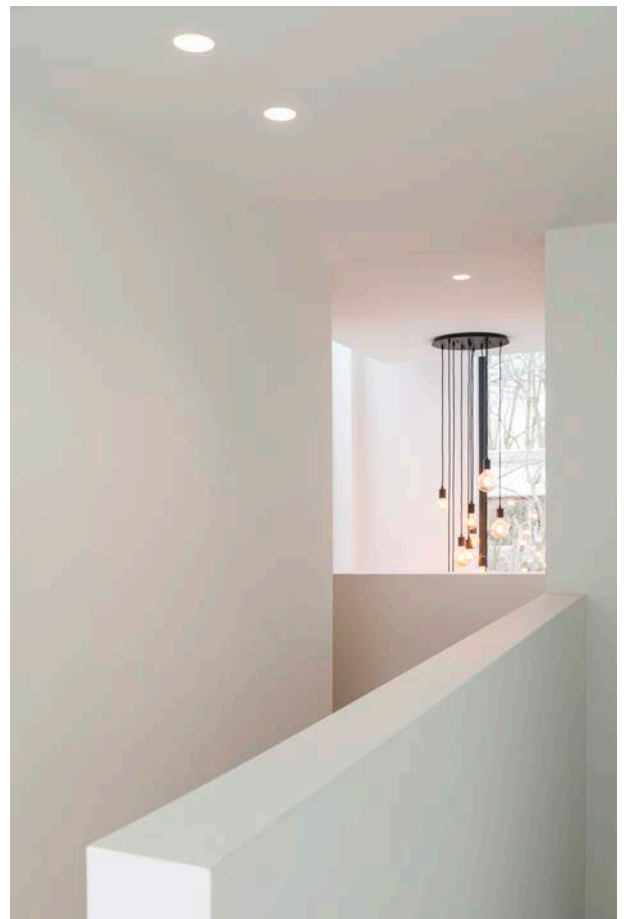
80 DALI 105

Options




S1 - SET TORSION SPRINGS



built-in



DC.1200.10012/.. - NORA DC



=350mA    IP20     



downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.1200.10012.1M	NW WW
DC.1200.10012.2M	NW WW
DC.1200.10012.14	NW WW





Lamp type
 1x LED DC 1200lm CRI92 max. 12,2W  350mA


Dimensions
 L100xB100xH75  36° reflector
 80 

Options
 S1 - SET TORSION SPRINGS

built-in

DC.1200.10013/.. - NORA DC



=350mA    IP20     



downlight - square - directional - LED module - lens - without LED driver
 Einbaustrahler - viereckig - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.1200.10013.1M	NW WW
DC.1200.10013.2M	NW WW
DC.1200.10013.14	NW WW

Lamp type
 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions
 L100xB100xH80  36° reflector
 80 

Options
 S1 - SET TORSION SPRINGS

built-in

DC.1200.10015/.. - NORA DC



=350mA    IP20     



downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.1200.10015.1M	NW WW
DC.1200.10015.2M	NW WW
DC.1200.10015.14	NW WW





Lamp type
 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions
 L100xB100xH85  36° reflector
 80 

Options
 S1 - SET TORSION SPRINGS

built-in

DC.1200.10018/.. - NORA DC



=350mA    IP20     



downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.1200.10018.1M	NW WW
DC.1200.10018.2M	NW WW
DC.1200.10018.14	NW WW

Lamp type
 1x LED DC 1200lm CRI92 max. 12,2W  350mA

Dimensions
 L100xB100xH90  36° reflector
 80 

Options
 S1 - SET TORSION SPRINGS

built-in

DC.700.10024/.. - NORA DC

=250mA IP20 0,3100 0,5 m 05.20.50



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

Ø80xH65 38° reflector

70 75

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.700.10024.1	NW WW
DC.700.10024.1M	NW WW
DC.700.10024.2	NW WW
DC.700.10024.2M	NW WW
DC.700.10024.4	NW WW
DC.700.10024.11	NW WW
DC.700.10024.13	NW WW
DC.700.10024.14	NW WW
DC.700.10024.16	NW WW
DC.700.10024.21	NW WW
DC.700.10024.23	NW WW
DC.700.10024.45	NW WW

built-in

DC.700.10026/.. - NORA DC

=250mA IP20 0,3100 0,5 m 05.20.50



downlight - round - directional - LED module - lens - without LED driver
Einbaustrahler - rund - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

Ø80xH80 36° reflector

70 90

Options

S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.700.10026.1	NW WW
DC.700.10026.1M	NW WW
DC.700.10026.2	NW WW
DC.700.10026.2M	NW WW
DC.700.10026.4	NW WW
DC.700.10026.11	NW WW
DC.700.10026.13	NW WW
DC.700.10026.14	NW WW
DC.700.10026.16	NW WW
DC.700.10026.21	NW WW
DC.700.10026.23	NW WW
DC.700.10026.45	NW WW

built-in

DC.700.10028/.. - NORA DC

=250mA IP20 0,3100 0,5 m 05.20.50



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

Ø80xH80 38° reflector

70 90

Options






S1 - SET TORSION SPRINGS

Ref cat (STD)

DC.700.10028.1	NW WW
DC.700.10028.1M	NW WW
DC.700.10028.2	NW WW
DC.700.10028.2M	NW WW
DC.700.10028.4	NW WW
DC.700.10028.11	NW WW
DC.700.10028.13	NW WW
DC.700.10028.14	NW WW
DC.700.10028.16	NW WW
DC.700.10028.21	NW WW
DC.700.10028.23	NW WW
DC.700.10028.45	NW WW

built-in

DC.700.10025/.. - NORA DC



=250mA    IP20     



downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.700.10025.1M	NW WW
DC.700.10025.2M	NW WW
DC.700.10025.14	NW WW









Lamp type
 1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions
 L80xB80xH65  36° reflector
 70  75

Options
 S1 - SET TORSION SPRINGS

built-in


DC.700.10027/.. - NORA DC



=250mA    IP20     



downlight - square - directional - LED module - lens - without LED driver
 Einbaustrahler - viereckig - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.700.10027.1M	NW WW
DC.700.10027.2M	NW WW
DC.700.10027.14	NW WW




Lamp type
 1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions
 L80xB80xH80  36° reflector
 70  90

Options
 S1 - SET TORSION SPRINGS

built-in


DC.700.10029/.. - NORA DC



=250mA    IP20     



downlight - square - fixed - LED module - lens - without LED driver
 Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)	
DC.700.10029.1M	NW WW
DC.700.10029.2M	NW WW
DC.700.10029.14	NW WW









Lamp type
 1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions
 L80xB80xH80  36° reflector
 70  90

Options
 S1 - SET TORSION SPRINGS

built-in

DC.700.10010/.. - NORA DC

=250mA    IP20     



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type
1x LED DC 700lm CRI92 max. 8,8W  250mA









Dimensions
Ø89xH65  38° reflector
80  75

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
DC.700.10010.1	NW WW
DC.700.10010.1M	NW WW
DC.700.10010.2	NW WW
DC.700.10010.2M	NW WW
DC.700.10010.4	NW WW
DC.700.10010.11	NW WW
DC.700.10010.13	NW WW
DC.700.10010.14	NW WW
DC.700.10010.16	NW WW
DC.700.10010.21	NW WW
DC.700.10010.23	NW WW
DC.700.10010.45	NW WW

built-in

DC.700.10011/.. - NORA DC

=250mA    IP20     



downlight - round - directional - LED module - lens - without LED driver
Einbaustrahler - rund - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Lamp type
1x LED DC 700lm CRI92 max. 8,8W  250mA







Dimensions
Ø89xH70  36° reflector
80  80

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
DC.700.10011.1	NW WW
DC.700.10011.1M	NW WW
DC.700.10011.2	NW WW
DC.700.10011.2M	NW WW
DC.700.10011.4	NW WW
DC.700.10011.11	NW WW
DC.700.10011.13	NW WW
DC.700.10011.14	NW WW
DC.700.10011.16	NW WW
DC.700.10011.21	NW WW
DC.700.10011.23	NW WW
DC.700.10011.45	NW WW


built-in



DC.700.10014/.. - NORA DC

=250mA    IP20     



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type
1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions
Ø89xH75  36° reflector
80  85


Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
DC.700.10014.1M	NW WW
DC.700.10014.2M	NW WW
DC.700.10014.14	NW WW


built-in

DC.700.10017/.. - NORA DC

=250mA    IP20     



downlight - round - fixed - LED module - lens - without LED driver
Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED

Lamp type
1x LED DC 700lm CRI92 max. 8,8W  250mA









Dimensions
Ø89xH75  36° reflector
80  85

Options
S1 - SET TORSION SPRINGS

Ref cat (STD)	
DC.700.10017.1M	NW WW
DC.700.10017.2M	NW WW
DC.700.10017.14	NW WW

built-in

DC.700.10016/.. - NORA DC

=250mA    IP20     




downlight - round - fixed - LED module - lens - without LED driver
 Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED


Ref cat (STD)

DC.700.10016.1M	NW WW
DC.700.10016.2M	NW WW
DC.700.10016.14	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions

Ø87xH115  36° reflector

80 








Options

S1 - SET TORSION SPRINGS



built-in

DC.700.10023/.. - NORA DC

=250mA    IP20     




downlight - round - fixed - LED module - lens - without LED driver
 Einbaustrahler - rund - fest - LED Modul - Objektiv - ohne Driver LED


Ref cat (STD)


DC.700.10023.1MA	NW WW
DC.700.10023.2MA	NW WW
DC.700.10023.11MA	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W  250mA

Dimensions

Ø89xH85  36° reflector

80 

Options

S1 - SET TORSION SPRINGS



built-in



DC.700.10012/.. - NORA DC

=250mA IP20 0,5 m



downlight - square - fixed - LED module - lens - without LED driver
Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

DC.700.10012.1M	NW WW
DC.700.10012.2M	NW WW
DC.700.10012.14	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

L100xB100xH65 36° reflector
 80 75

Options

S1 - SET TORSION SPRINGS

built-in

DC.700.10013/.. - NORA DC

=250mA IP20 0,5 m



downlight - square - directional - LED module - lens - without LED driver
Einbaustrahler - viereckig - schwenkbar - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

DC.700.10013.1M	NW WW
DC.700.10013.2M	NW WW
DC.700.10013.14	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

L100xB100xH70 36° reflector
 80 80

Options

S1 - SET TORSION SPRINGS

built-in

DC.700.10015/.. - NORA DC

=250mA IP20 0,5 m



downlight - square - fixed - LED module - lens - without LED driver
Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref cat (STD)

DC.700.10015.1M	NW WW
DC.700.10015.2M	NW WW
DC.700.10015.14	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions

L100xB100xH75 36° reflector
 80 85

Options

S1 - SET TORSION SPRINGS

built-in

DC.700.10018/.. - NORA DC

=250mA IP20 0,5 m



downlight - square - fixed - LED module - lens - without LED driver
Einbaustrahler - viereckig - fest - LED Modul - Objektiv - ohne Driver LED

Ref

DC.700.10018.1M	NW WW
DC.700.10018.2M	NW WW
DC.700.10018.14	NW WW

Lamp type

1x LED DC 700lm CRI92 max. 8,8W 250mA

Dimensions










L100xB100xH75 36° reflector
 80 85

Options

S1 - SET TORSION SPRINGS


built-in

444.10024/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA

Dimensions
Ø80xH30  36° reflector
70  40

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10024.1	NW WW
444.10024.1M	NW WW
444.10024.2	NW WW
444.10024.2M	NW WW
444.10024.4	NW WW
444.10024.11	NW WW
444.10024.13	NW WW
444.10024.14	NW WW
444.10024.16	NW WW
444.10024.21	NW WW
444.10024.23	NW WW
444.10024.45	NW WW


built-in



444.10026/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - directional - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA










Dimensions
Ø80xH30  36° reflector
70  40

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10026.1	NW WW
444.10026.1M	NW WW
444.10026.2	NW WW
444.10026.2M	NW WW
444.10026.4	NW WW
444.10026.11	NW WW
444.10026.13	NW WW
444.10026.14	NW WW
444.10026.16	NW WW
444.10026.21	NW WW
444.10026.23	NW WW
444.10026.45	NW WW


built-in



444.10028/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA





Dimensions
Ø80xH40  36° reflector
70  50

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10028.1	NW WW
444.10028.1M	NW WW
444.10028.2	NW WW
444.10028.2M	NW WW
444.10028.4	NW WW
444.10028.11	NW WW
444.10028.13	NW WW
444.10028.14	NW WW
444.10028.16	NW WW
444.10028.21	NW WW
444.10028.23	NW WW
444.10028.45	NW WW

built-in

444.10025/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10025.1M	NW WW
444.10025.2M	NW WW
444.10025.14	NW WW










Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 Ø80xH45  36° reflector
 70  55

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


444.10027/.. - NOVA FLAT LED + DRIVER



~230V   S2  IP20      



downlight - square - directional - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10027.1M	NW WW
444.10027.2M	NW WW
444.10027.14	NW WW


Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L80xB80xH45  36° reflector
 70  55

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


444.10029/.. - NOVA FLAT LED + DRIVER



~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10029.1M	NW WW
444.10029.2M	NW WW
444.10029.14	NW WW






Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L80xB80xH40  36° reflector
 70  50

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

444.10010/.. - NOVA FLAT LED + DRIVER

~230V   IP20   0,3100 0,5 m 05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA




Dimensions
Ø89xH35  38° reflector
80 

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10010.1	NW WW
444.10010.1M	NW WW
444.10010.2	NW WW
444.10010.2M	NW WW
444.10010.4	NW WW
444.10010.11	NW WW
444.10010.13	NW WW
444.10010.14	NW WW
444.10010.16	NW WW
444.10010.21	NW WW
444.10010.23	NW WW
444.10010.45	NW WW

built-in

444.10011/.. - NOVA FLAT LED + DRIVER

~230V   IP20   0,3100 0,5 m 05.20.50 



downlight - round - directional - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA




Dimensions
Ø89xH35  36° reflector
80 

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10011.1	NW WW
444.10011.1M	NW WW
444.10011.2	NW WW
444.10011.2M	NW WW
444.10011.4	NW WW
444.10011.11	NW WW
444.10011.13	NW WW
444.10011.14	NW WW
444.10011.16	NW WW
444.10011.21	NW WW
444.10011.23	NW WW
444.10011.45	NW WW

built-in

444.10014/.. - NOVA FLAT LED + DRIVER

~230V   IP20   0,3100 0,5 m 05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA




Dimensions
Ø89xH40  36° reflector
80 

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10014.1M	NW WW
444.10014.2M	NW WW
444.10014.14	NW WW


built-in

444.10017/.. - NOVA FLAT LED + DRIVER

~230V   IP20   0,2800 0,5 m 05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 450lm CRI98 max. 6W  120mA






Dimensions
Ø89xH40  36° reflector
80 

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
444.10017.1M	NW WW
444.10017.2M	NW WW
444.10017.14	NW WW

built-in

444.10016/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



built-in





downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED





Ref cat (STD)

444.10016.1M	NW WW
444.10016.2M	NW WW
444.10016.14	NW WW

Lamp type

 1x LED 450lm CRI98 max. 6W  120mA

Dimensions

 Ø87xH70  36° reflector
 80  80

Options

NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

444.10023/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP44      



built-in





downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED





Ref cat (STD)

444.10023.1MA	NW WW
444.10023.2MA	NW WW
444.10023.11MA	NW WW

Lamp type

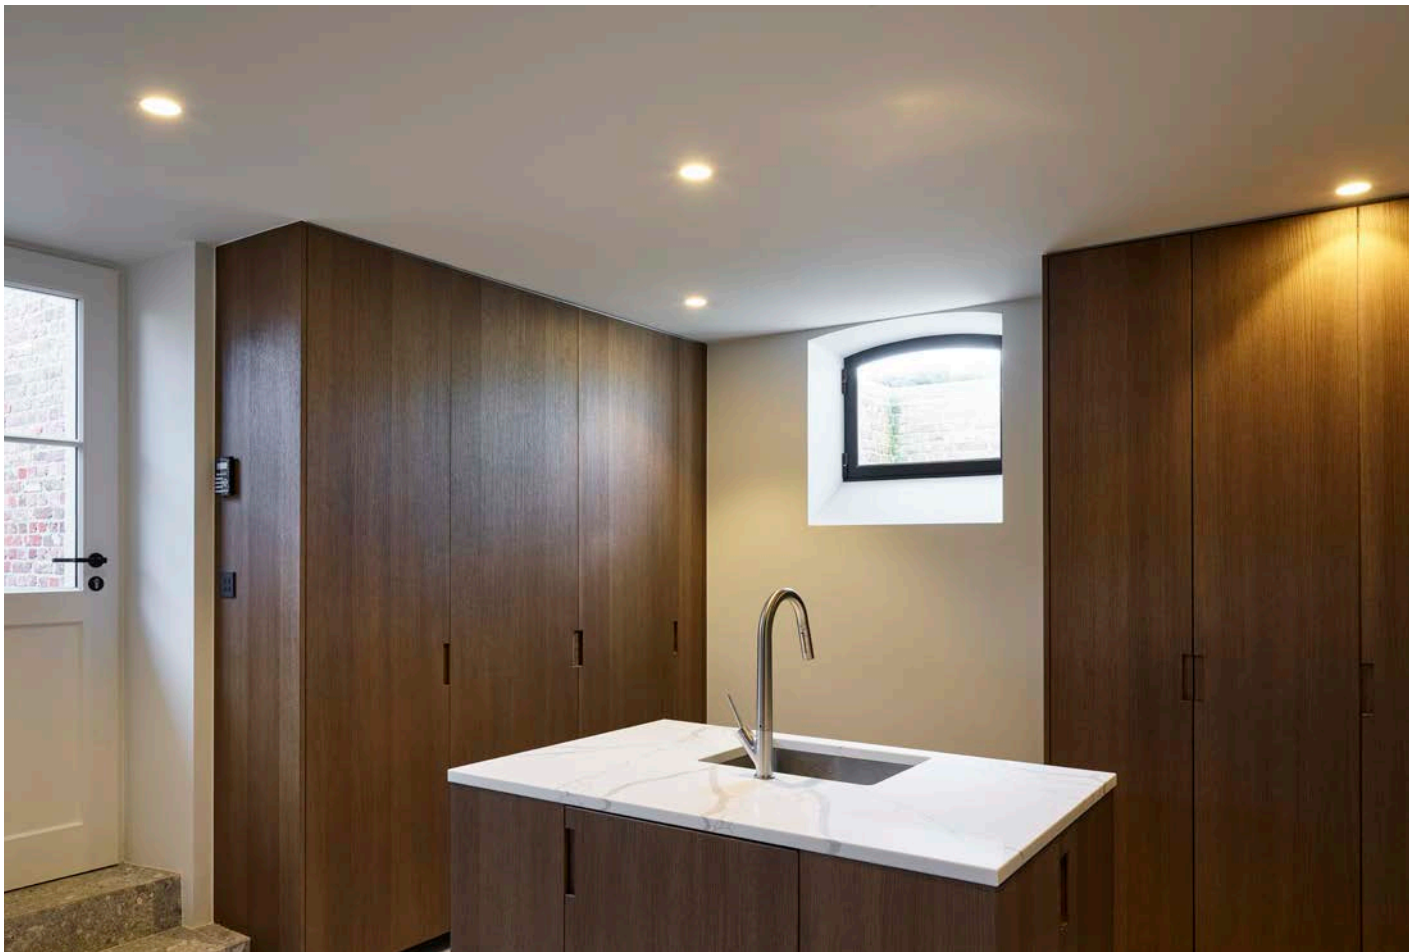
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions








 Ø89xH50  36° reflector
 80  60

Options

NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS




444.10012/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10012.1M	NW WW
444.10012.1MA	WW
444.10012.2M	NW WW
444.10012.14	NW WW








Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L100xB100xH35 \wedge 36° reflector
 80 \sqrt{L} 45

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

444.10013/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



downlight - square - directional - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10013.1M	NW WW
444.10013.2M	NW WW
444.10013.14	NW WW





Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L100xB100xH35 \wedge 36° reflector
 80 \sqrt{L} 45

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


444.10015/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10015.1M	NW WW
444.10015.2M	NW WW
444.10015.14	NW WW

Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L100xB100xH40 \wedge 36° reflector
 80 \sqrt{L} 50

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


444.10018/.. - NOVA FLAT LED + DRIVER

~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
444.10018.1M	NW WW
444.10018.2M	NW WW
444.10018.14	NW WW










Lamp type
 1x LED 450lm CRI98 max. 6W  120mA

Dimensions
 L100xB100xH40 \wedge 36° reflector
 80 \sqrt{L} 50

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS


built-in

555.10024/.. - NOVA LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 670lm CRI98 max. 8W  180mA

Dimensions
Ø80xH55  38° reflector
70  65

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
555.10024.1	NW WW
555.10024.1M	NW WW
555.10024.2	NW WW
555.10024.2M	NW WW
555.10024.4	NW WW
555.10024.11	NW WW
555.10024.13	NW WW
555.10024.14	NW WW
555.10024.16	NW WW
555.10024.21	NW WW
555.10024.23	NW WW
555.10024.45	NW WW


built-in



555.10026/.. - NOVA LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - directional - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 670lm CRI98 max. 8W  180mA










Dimensions
Ø80xH70  36° reflector
70  80

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
555.10026.1	NW WW
555.10026.1M	NW WW
555.10026.2	NW WW
555.10026.2M	NW WW
555.10026.4	NW WW
555.10026.11	NW WW
555.10026.13	NW WW
555.10026.14	NW WW
555.10026.16	NW WW
555.10026.21	NW WW
555.10026.23	NW WW
555.10026.45	NW WW


built-in



555.10028/.. - NOVA LED + DRIVER

~230V   S2  IP20    0,3100  0,5 m  05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type
1x LED 670lm CRI98 max. 8W  180mA








Dimensions
Ø80xH70  38° reflector
70  80

Options
NOVA.D15 - NOVA LED LENS
NOVA.D60 - NOVA LED LENS
S1 - SET TORSION SPRINGS

Ref cat (STD)	
555.10028.1	NW WW
555.10028.1M	NW WW
555.10028.2	NW WW
555.10028.2M	NW WW
555.10028.4	NW WW
555.10028.11	NW WW
555.10028.13	NW WW
555.10028.14	NW WW
555.10028.16	NW WW
555.10028.21	NW WW
555.10028.23	NW WW
555.10028.45	NW WW

built-in


555.10025/.. - NOVA LED + DRIVER



~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10025.1M	NW WW
555.10025.2M	NW WW
555.10025.14	NW WW









Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L80xB80xH55  36° reflector
 70  65

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

555.10027/.. - NOVA LED + DRIVER



~230V   S2  IP20     



downlight - square - directional - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - schwenkbar - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10027.1M	NW WW
555.10027.2M	NW WW
555.10027.14	NW WW




Lamp type
 1x LED 670lm CRI98 max. 8W  180mA


Dimensions
 L80xB80xH70  36° reflector
 70  80

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


555.10029/.. - NOVA LED + DRIVER



~230V   S2  IP20     



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10029.1M	NW WW
555.10029.2M	NW WW
555.10029.14	NW WW

Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L80xB80xH70  36° reflector
 70  80

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


555.10010/.. - NOVA LED + DRIVER

~230V   IP20   0,4000 0,5 m 05.20.50 



downlight - round - fixed - down - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type

1x LED 670lm CRI98 max. 8W  180mA

Dimensions

Ø89xH60 36° reflector

80 70

Options

NOVA.D15 - NOVA LED LENS

NOVA.D60 - NOVA LED LENS

S1 - SET TORSION SPRINGS

Ref cat (STD)

555.10010.1	NW WW
555.10010.1M	NW WW
555.10010.2	NW WW
555.10010.2M	NW WW
555.10010.4	NW WW
555.10010.11	NW WW
555.10010.13	NW WW
555.10010.14	NW WW
555.10010.16	NW WW
555.10010.21	NW WW
555.10010.23	NW WW
555.10010.45	NW WW

built-in


555.10011/.. - NOVA LED + DRIVER

~230V   IP20   0,4000 0,5 m 05.20.50 



downlight - round - directional - down - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - schwenkbar - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type

1x LED 670lm CRI98 max. 8W  180mA

Dimensions

Ø89xH65 36° reflector

80 75

Options

NOVA.D15 - NOVA LED LENS

NOVA.D60 - NOVA LED LENS

S1 - SET TORSION SPRINGS

Ref cat (STD)

555.10011.1	NW WW
555.10011.1M	NW WW
555.10011.2	NW WW
555.10011.2M	NW WW
555.10011.4	NW WW
555.10011.11	NW WW
555.10011.13	NW WW
555.10011.14	NW WW
555.10011.16	NW WW
555.10011.21	NW WW
555.10011.23	NW WW
555.10011.45	NW WW

built-in


555.10014/.. - NOVA LED + DRIVER

~230V   IP20   0,4000 0,5 m 05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type

1x LED 670lm CRI98 max. 8W  180mA

Dimensions

Ø89xH70 36° reflector

80 80

Options

NOVA.D15 - NOVA LED LENS

NOVA.D60 - NOVA LED LENS

S1 - SET TORSION SPRINGS

Ref cat (STD)

555.10014.1M	NW WW
555.10014.2M	NW WW
555.10014.14	NW WW

built-in


555.10017/.. - NOVA LED + DRIVER

~230V   IP20   0,5 m 05.20.50 



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Lamp type

1x LED 670lm CRI98 max. 8W  180mA

Dimensions

Ø89xH70 36° reflector

80 80

Options

NOVA.D15 - NOVA LED LENS

NOVA.D60 - NOVA LED LENS

S1 - SET TORSION SPRINGS

Ref cat (STD)

555.10017.1M	NW WW
555.10017.2M	NW WW
555.10017.14	NW WW

built-in

555.10016/.. - NOVA LED + DRIVER

~230V



IP20



downlight - round - fixed - down - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - rund - fest - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)

555.10016.1M	NW WW
555.10016.2M	NW WW
555.10016.14	NW WW

Lamptype

1x LED 670lm CRI98 max. 8W **A+** 180mA

Dimensions

Ø87xH100 36° reflector

80 110

Options

- NOVA.D15 - NOVA LED LENS
- NOVA.D60 - NOVA LED LENS
- S1 - SET TORSION SPRINGS



built-in

555.10023/.. - NOVA LED + DRIVER

~230V



IP44



downlight - round - fixed - dimmable - set (driver + led + spotlight) - with LED driver
 Einbaustrahler - rund - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)

555.10023.1MA	NW WW
555.10023.2MA	NW WW
555.10023.11MA	NW WW

Lamptype

1x LED 670lm CRI98 max. 8W **A+** 180mA

Dimensions

Ø89xH85 36° reflector

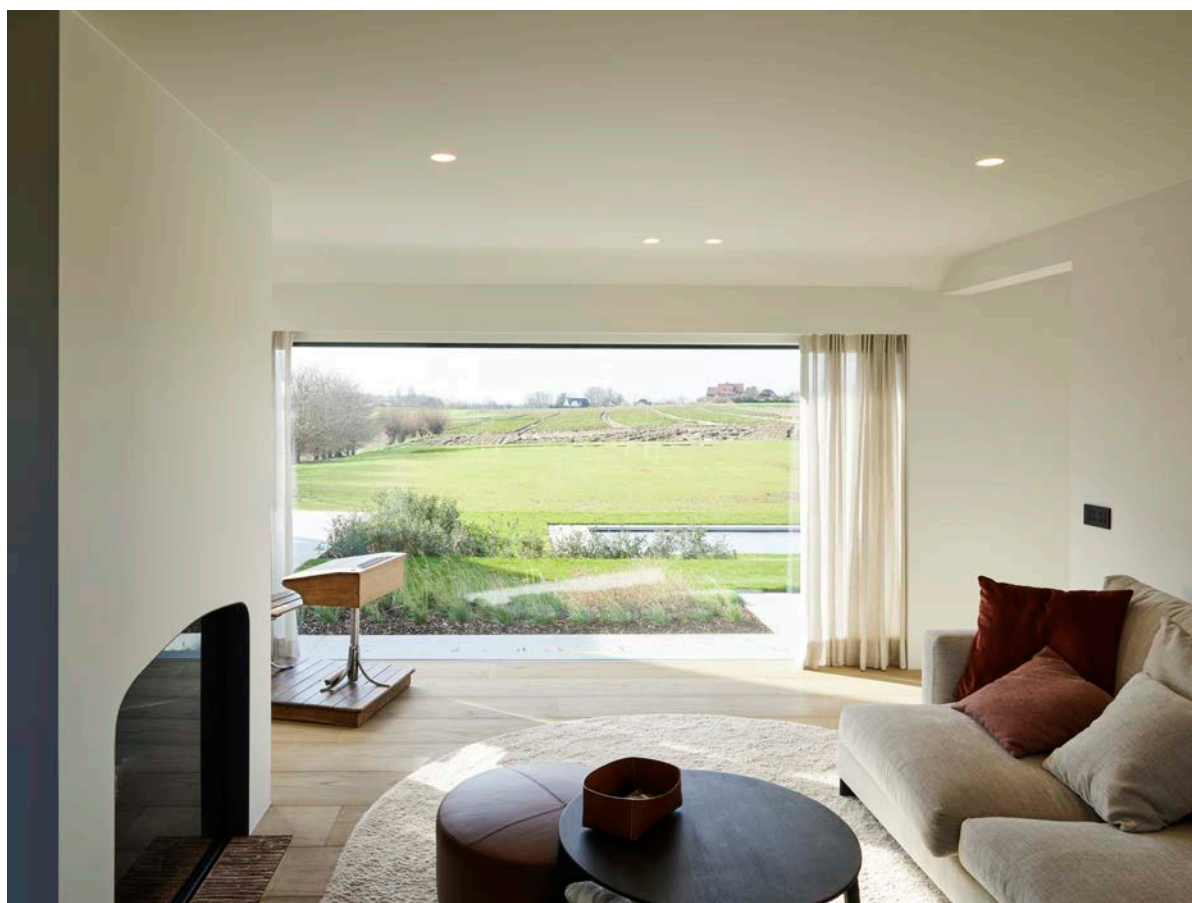
80 95

Options

- NOVA.D15 - NOVA LED LENS
- NOVA.D60 - NOVA LED LENS
- S1 - SET TORSION SPRINGS



built-in



555.10012/.. - NOVA LED + DRIVER





~230V   S2  IP20    0,3550  0,5 m  05.20.50 



downlight - square - fixed - down - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - viereckig - fest - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10012.1M	NW WW
555.10012.2M	NW WW
555.10012.14	NW WW

Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L100xB100xH60  36° reflector
 80  70

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

555.10013/.. - NOVA LED + DRIVER





~230V   S2  IP20    0,3600  0,5 m  05.20.50 



downlight - square - directional - down - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - viereckig - schwenkbar - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10013.1M	NW WW
555.10013.2M	NW WW
555.10013.14	NW WW


Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L100xB100xH65  36° reflector
 80  75

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in


555.10015/.. - NOVA LED + DRIVER





~230V   S2  IP20    0,3850  0,5 m  05.20.50 



downlight - square - fixed - down - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - viereckig - fest - down - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10015.1M	NW WW
555.10015.2M	NW WW
555.10015.14	NW WW



Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L100xB100xH70  36° reflector
 80  80

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

555.10018/.. - NOVA LED + DRIVER





~230V   S2  IP20    0,5 m  05.20.50 



downlight - square - fixed - dimmable - set (driver + led + spotlight) - with LED driver
Einbaustrahler - viereckig - fest - dimmbar - Set (Treiber + LED + Strahler) - mit Driver LED

Ref cat (STD)	
555.10018.1M	NW WW
555.10018.2M	NW WW
555.10018.14	NW WW




Lamp type
 1x LED 670lm CRI98 max. 8W  180mA

Dimensions
 L100xB100xH70  36° reflector
 80  80

Options
 NOVA.D15 - NOVA LED LENS
 NOVA.D60 - NOVA LED LENS
 S1 - SET TORSION SPRINGS

built-in

666.10024/.. - NOVA SOFT DIM + DRIVER

~230V  S2      



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
1x Led 475lm CRI95 max. 9W   180mA

Dimensions
Ø80xH65  36° reflector
70 

Options
S1 - SET TORSION SPRINGS




Materials
aluminium 1 | 2 | 11 | 14 | 1M | 21 | 2M | 45
brass 4 | 13 | 16 | 23

Ref cat (STD)

666.10024.1.WW	white
666.10024.1M.WW	white tex
666.10024.2.WW	black
666.10024.2M.WW	black tex
666.10024.4.WW	shiny gold
666.10024.11.WW	alu grey
666.10024.13.WW	bronze
666.10024.14.WW	alu satin
666.10024.16.WW	satin gold
666.10024.21.WW	rust
666.10024.23.WW	dark bronze
666.10024.45.WW	sun gold

built-in



666.10026/.. - NOVA SOFT DIM + DRIVER

~230V  S2      



downlight - round - directional - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
1x Led 475lm CRI95 max. 9W   180mA

Dimensions
Ø80xH65  36° reflector
70 

Options
S1 - SET TORSION SPRINGS


Materials
aluminium 1 | 2 | 11 | 14 | 1M | 21 | 2M | 45
brass 4 | 13 | 16 | 23

Ref cat (STD)

666.10026.1.WW	white
666.10026.1M.WW	white tex
666.10026.2.WW	black
666.10026.2M.WW	black tex
666.10026.4.WW	shiny gold
666.10026.11.WW	alu grey
666.10026.13.WW	bronze
666.10026.14.WW	alu satin
666.10026.16.WW	satin gold
666.10026.21.WW	rust
666.10026.23.WW	dark bronze
666.10026.45.WW	sun gold

built-in



666.10028/.. - NOVA SOFT DIM + DRIVER

~230V  S2      



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
1x Led 475lm CRI95 max. 9W   180mA

Dimensions
Ø80xH75  36° reflector
70 

Options
S1 - SET TORSION SPRINGS

Materials
aluminium 1 | 2 | 11 | 14 | 1M | 21 | 2M | 45
brass 4 | 13 | 16 | 23

Ref cat (STD)

666.10028.1.WW	white
666.10028.1M.WW	white tex
666.10028.2.WW	black
666.10028.2M.WW	black tex
666.10028.4.WW	shiny gold
666.10028.11.WW	alu grey
666.10028.13.WW	bronze
666.10028.14.WW	alu satin
666.10028.16.WW	satin gold
666.10028.21.WW	rust
666.10028.23.WW	dark bronze
666.10028.45.WW	sun gold

built-in

666.10025/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     





built-in

downlight - square - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED




Ref cat (STD)

666.10025.1M.WW white tex
666.10025.2M.WW black tex
666.10025.14.WW alu satin

Lamp type

 1x LED 670lm CRI98 max. 8W  180mA

Dimensions

 L80xB80xH65  36° reflector
 70  75

Options

S1 - SET TORSION SPRINGS

Materials

aluminium 14 | 1M | 2M

666.10027/.. - NOVA SOFT DIM + DRIVER

~230V   S2 IP20     






built-in

downlight - square - directional - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10027.1M.WW white tex
666.10027.2M.WW black tex
666.10027.14.WW alu satin

Lamp type

 1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions

 L80xB80xH75  36° reflector
 70  85


Options

S1 - SET TORSION SPRINGS

Materials

aluminium 14 | 1M | 2M

666.10029/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     





built-in

downlight - square - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10029.1M.WW white tex
666.10029.2M.WW black tex
666.10029.14.WW alu satin

Lamp type

 1x LED 670lm CRI98 max. 8W  180mA

Dimensions

 L80xB80xH75  36° reflector
 70  85

Options

S1 - SET TORSION SPRINGS

Materials



aluminium 14 | 1M | 2M

666.10010/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20    0,5 m  05.20.50 



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
 Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
 1x Led 475lm CRI95 max. 9W   180mA

Dimensions
 Ø89xH65  36° reflector
 80  75

Options
 S1 - SET TORSION SPRINGS

Materials
 aluminium 1 | 2 | 11 | 14 | 1M | 21 | 2M | 45
 brass 4 | 13 | 16 | 23

Ref cat (STD)

666.10010.1.WW	white
666.10010.1M.WW	white tex
666.10010.2.WW	black
666.10010.2M.WW	black tex
666.10010.4.WW	shiny gold
666.10010.11.WW	alu grey
666.10010.13.WW	bronze
666.10010.14.WW	alu satin
666.10010.16.WW	satin gold
666.10010.21.WW	rust
666.10010.23.WW	dark bronze
666.10010.45.WW	sun gold



built-in



666.10011/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20    0,5 m  05.20.50 



downlight - round - directional - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
 Einbaustrahler - rund - schwenkbar - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
 1x Led 475lm CRI95 max. 9W   180mA

Dimensions
 Ø89xH70  36° reflector
 80  80

Options
 S1 - SET TORSION SPRINGS

Materials
 aluminium 1 | 2 | 11 | 14 | 1M | 21 | 2M | 45
 brass 4 | 13 | 16 | 23

Ref cat (STD)

666.10011.1.WW	white
666.10011.1M.WW	white tex
666.10011.2.WW	black
666.10011.2M.WW	black tex
666.10011.4.WW	shiny gold
666.10011.11.WW	alu grey
666.10011.13.WW	bronze
666.10011.14.WW	alu satin
666.10011.16.WW	satin gold
666.10011.21.WW	rust
666.10011.23.WW	dark bronze
666.10011.45.WW	sun gold



built-in



666.10014/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20    0,3700 0,5 m  05.20.50 



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
 Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Lamp type
 1x Led 475lm CRI95 max. 9W   180mA

Dimensions
 Ø90xH70  36° reflector
 80  80

Options
 S1 - SET TORSION SPRINGS

Materials
 aluminium 14 | 1M | 2M

Ref cat (STD)

666.10014.1M.WW	white tex
666.10014.2M.WW	black tex
666.10014.14.WW	alu satin

built-in



666.10016/.. - NOVA SOFT DIM + DRIVER



~230V   IP20    0,3700 0,5 m 05.20.50 



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Ref cat (STD)	
666.10016.1M.WW	white tex
666.10016.2M.WW	black tex
666.10016.14.WW	alu satin

Lamp type
1x Led 475lm CRI95 max. 9W  -  180mA


Dimensions
Ø87xH100  36° reflector
80  110


Options
S1 - SET TORSION SPRINGS

Materials
aluminium 14 | 1M | 2M

built-in



666.10017/.. - NOVA SOFT DIM + DRIVER



~230V   IP20    0,3700 0,5 m 05.20.50 



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Ref cat (STD)	
666.10017.1M.WW	white tex
666.10017.2M.WW	black tex
666.10017.14.WW	alu satin

Lamp type
1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions
Ø89xH80  36° reflector
80  90

Options
S1 - SET TORSION SPRINGS

Materials
aluminium 14 | 1M | 2M

built-in



666.10023/.. - NOVA SOFT DIM + DRIVER



~230V   IP20    0,3700 0,5 m 05.20.50 



downlight - round - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - rund - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED

Ref cat (STD)	
666.10023.1M.WW	white tex
666.10023.2M.WW	black tex
666.10023.14.WW	alu satin

Lamp type
1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions
Ø89xH80  36° reflector
80  90

Options
S1 - SET TORSION SPRINGS

Materials
aluminium 14 | 1M | 2M

built-in

666.10012/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     






downlight - square - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10012.1M.WW white tex
666.10012.2M.WW black tex
666.10012.14.WW alu satin

Lamp type

 1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions

 L100xB100xH65  36° reflector
 80  75

Options

S1 - SET TORSION SPRINGS

Materials

aluminium 14 | 1M | 2M

built-in

666.10013/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     






downlight - square - directional - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - schwenkbar - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10013.1M.WW white tex
666.10013.2M.WW black tex
666.10013.14.WW alu satin

Lamp type

 1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions

 L100xB100xH70  36° reflector
 80  80

Options

S1 - SET TORSION SPRINGS

Materials

aluminium 14 | 1M | 2M

built-in

666.10015/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     






downlight - square - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10015.1M.WW white tex
666.10015.2M.WW black tex
666.10015.14.WW alu satin

Lamp type

 1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions

 L100xB100xH70  36° reflector
 80  80

Options








S1 - SET TORSION SPRINGS

Materials

aluminium 14 | 1M | 2M

built-in

666.10018/.. - NOVA SOFT DIM + DRIVER

~230V   S2  IP20     






downlight - square - fixed - dimmable phase-cut - set (driver + led + spot) 1800K>2800K - with LED driver
Einbaustrahler - viereckig - fest - dimmbar Phasenabschnitt - Set (Treiber + Led + Strahler) 1800K > 2800K - mit Driver LED





Ref cat (STD)

666.10018.1MA.WW white tex ano
666.10018.2MA.WW black tex ano
666.10018.11MA.WW grey tex ano

Lamp type

 1x Led 475lm CRI95 max. 9W  -  180mA

Dimensions

 L100xB100xH80  36° reflector
 80  90

Options

S1 - SET TORSION SPRINGS


Materials

ALU ANODISE 1MA | 2MA | 11MA

built-in



NOVA.D15/.. - NOVA LED LENS

IP20  



Lens 15°
Lens 15°


Dimensions

 Ø50  15

Ref cat (STD)
NOVA.D15


NOVA.D60/.. - NOVA LED LENS

IP20  



Lens 60°
Lens 60°

Dimensions

 Ø50  60

Ref cat (STD)
NOVA.D60

350mA

Code	Input voltage	Output voltage	Output power	Max power factor	Dimensions	0-10V	1-10V	PUSH	DALI	Phase cut-on	Phase cut-off	Casambi	Not dimmable	Price
VLMPTDCC3.350MA/..	230V 50Hz	8,5V	3.00W	0,86	L40xB42xH21									€23,28
RSD35005E/..	230V 50Hz	8-14V	5.00W	0,95	Ø53xH22									€25,00
LTLLED6CC.350mA/..	230V 50Hz	2-17V	6.00W	0,90	L45xB45xH25									€35,26
OT9D.350MA/..	230V 50Hz	10-26V	9.00W	0,90	L108xB53xH33									€43,74
TR127040/..	230V 50Hz	8,5-28V	10.00W	0,96	L102xB38xH21,2									€27,95
TR122790/..	230V 50Hz	2-31V	12.00W	0,54	L66xB50xH22									€32,24
TR28002403/..	230V 50Hz	21-40V	14.00W	0,90	Ø42xH20									€18,90
TR89800255/..	230V 50Hz	21-46V	15.00W	0,97	L139xB30xH21									€25,50
TR123403/..	230V 50Hz	2-43V	15.00W	0,92	L111xB52xH22									€50,35
TR123400/..	230V 50Hz	2-43V	15.00W	0,95	L111xB52xH22									€40,57
TR87500386/..	230V 50Hz	21-42V	15.00W	0,97	L102xB51xH30									€24,75
TR122200/..	230V 50Hz	2-47V	17.00W	0,98	L103xB67xH21									€48,90
TR122246/..	230V 50Hz	3-47V	17.00W	0,55	L122xB38xH28									€31,15
TR122260/..	230V 50Hz	2-47V	17.00W	0,97	L166xB46xH34									€64,84
VLMPTDCC15.350MA/..	230V 50Hz	48V	17.00W	0,90	L124xB40xH20									€32,40
TR123424/..	230V 50Hz	5-48V	17.00W	0,95	L103xB67xH21									€49,70
TR127556/..	230V 50Hz	10-48V	17.00W	0,85	L110xB52xH22									€44,52
TRLCM25/..	230V 50Hz	6-54V	18.00W	0,94	L105xB68xH23									€62,99
TR123680/..	230V 50Hz	2-53V	18.00W	0,96	L124xB79xH22									€59,15
TR127630/..	230V 50Hz	10-54V	18.50W	0,95	L124xB79xH22									€97,65
LPC20-350/..	230V 50Hz	9-48V	20.00W	0,83	L118xB35xH26									€20,19
TR122204/..	230V 50Hz	2-72V	25.00W	0,95	L124xB79xH22									€64,84
TR127411/..	230V 50Hz	2-74V	25.00W	0,95	L124xB79xH22									€93,82
TR127413/..	230V 50Hz	2-74V	25.00W	0,95	L124xB79xH22									€91,08
TRLCM40/..	230V 50Hz	2-100V	40.00W	0,91	L123,5xB81,5xH23									€60,20

500mA

Code	Input voltage	Output voltage	Output power	Max power factor	Dimensions	0-10V	1-10V	PUSH	DALI	Phase cut-on	Phase cut-off	Casambi	Not dimmable	Price
RSD50007E/..	230V 50Hz	8-14V	7.00W	0,90	Ø53xH22									€27,00
TR127042/..	230V 50Hz	6-20V	10.00W	0,96	L102xB38xH21									€27,95
TR122794/..	230V 50Hz	2-24V	12.00W	0,54	L66xB50xH22									€32,24
TR87500320/..	230V 50Hz	13,5-30V	15.00W	0,97	L102xB51xH30									€24,75
TR89800256/..	230V 50Hz	13,5-30V	15.00W	0,97	L139xB30xH21									€25,50
TR122248/..	230V 50Hz	3-40V	20.00W	0,57	L122xB38xH28									€36,95
TR123403/..	230V 50Hz	2-40V	20.00W	0,92	L111xB52xH22									€50,35
TR123400/..	230V 50Hz	2-43V	20.00W	0,95	L111xB52xH22									€40,57
TR127556/..	230V 50Hz	5-40V	20.00W	0,85	L110xB52xH22									€44,52
TR122200/..	230V 50Hz	2-47V	24.00W	0,98	L103xB67xH21									€48,90
TR122260/..	230V 50Hz	2-47V	24.00W	0,97	L166xB46xH34									€64,84
TR123424/..	230V 50Hz	5-48V	24.00W	0,95	L103xB67xH21									€49,70
TRLCM25/..	230V 50Hz	6-50V	25.00W	0,94	L105xB68xH23									€62,99
TR123680/..	230V 50Hz	2-46V	26.00W	0,96	L124xB79xH22									€59,15
TR127630/..	230V 50Hz	10-54V	27.00W	0,95	L124xB79xH22									€97,65
TR122204/..	230V 50Hz	2-72V	35.00W	0,95	L124xB79xH22									€64,84
TR127411/..	230V 50Hz	2,72V	35.00W	0,95	L124xB79xH22									€93,82
TR127413/..	230V 50Hz	2-72V	35.00W	0,95	L124xB79xH22									€91,08
TRLCM40/..	230V 50Hz	2-80V	40.00W	0,91	L123,5xB81,5xH23									€60,20

700mA

Code	Input voltage	Output voltage	Output power	Max power factor	Dimensions	0-10V	1-10V	PUSH	DALI	Phase cut-on	Phase cut-off	Casambi	Not dimmable	Price
LTLLED6CC.700MA/..	230V 50Hz	2-9V	6.00W	0,90	L45xB45xH25									€37,50
TR127046/..	230V 50Hz	3-14V	10.00W	0,96	L102xB38xH21									€27,95
TR122792/..	230V 50Hz	2-16V	12.00W	0,54	L66xB50xH22									€32,24
TR87500387/..	230V 50Hz	10-20V	14.00W	0,97	L102xB51xH30									€24,75
TR89800257/..	230V 50Hz	10-21,5V	15.00W	0,97	L139xB30xH21									€25,50
TR122234/..	230V 50Hz	2-24V	17.00W	0,60	L122xB38xH28									€36,95
VLMPTDCC15.700B/..	230V 50Hz	24V	17.00W	0,90	L124xB38xH20									€32,40
OT18D.700MA/..	230V 50Hz	2-25V	18.00W	0,52	L108xB53xH33									€70,37
RN1408/..	230V 50Hz	6-26V	18.00W	0,90	L133xB44xH28									€43,83
TR123403/..	230V 50Hz	2-28V	20.00W	0,92	L111xB52xH22									€50,35
TR123400/..	230V 50Hz	2-29V	20.00W	0,95	L111xB52xH22									€40,57
TR127556/..	230V 50Hz	5-29V	20.00W	0,85	L110xB52xH22									€44,52
LPC20-700/..	230V 50Hz	9-30V	20.00W	0,83	L118xB35xH26									€20,19
TRLCM25/..	230V 50Hz	6-36V	25.00W	0,94	L105xB68xH23									€62,99
TR122200/..	230V 50Hz	2-46V	32.00W	0,98	L103xB67xH21									€48,90
TR122260/..	230V 50Hz	2-46V	32.00W	0,97	L166xB46xH34									€64,84
TR123424/..	230V 50Hz	3-46V	32.00W	0,95	L103xB67xH21									€49,70
TR123680/..	230V 50Hz	2-46V	32.00W	0,96	L124xB79xH22									€59,15
OT35.700MA/..	230V 50Hz	24-50V	36.00W	0,95	L123xB79xH33									€157,09
LPC35-700/..	230V 50Hz	9-48V	35.00W	0,85	L148xB40xH30									€29,05
TR127630/..	230V 50Hz	10-20V	36.00W	0,95	L124xB79xH22									€97,65
TRLCM40/..	230V 50Hz	2-57V	40.00W	0,91	L123,5xB81,5xH23									€60,20
TR122204/..	230V 50Hz	2-71V	50.00W	0,95	L124xB79xH22									€64,84
TR127411/..	230V 50Hz	2,72V	50.00W	0,95	L124xB79xH22									€93,82
TR127413/..	230V 50Hz	2-72V	50.00W	0,95	L124xB79xH22									€91,08



PLEASE PAY ATTENTION TO THE FOLLOWING WHEN INSTALLING LEDMODULES:

1. The connection, testing and installation of the fixtures should always be carried out by a **registered electrician** in compliance with current local regulations!
2. Do not touch the yellow surface of the led (phosphorus) with your hands both in cooled as well as in heated condition.
3. **When installing the spots please first cut off the power supply!** Then, connect the cables, the led module and the driver. Finally, reconnect the power supply.
4. Provide enough space around the led module because overheating= less life span and other colour rendering!

A. BUILD-IN SPOTS FOR SUSPENDED CEILING:

Make sure that the spots and the cooling fins are not covered with insulation because these cooling fins optimize the performance and the thermal dispersion.

B. BUILD-IN SPOTS FOR VAULT OR CONCRETE CEILING:

Make sure that there is enough space above the spotlight in order to have enough circulation of air around the cooling fins.

If necessary, drivers can be put at a distance (see p. 4 max. distance driver led)

5. The luminary is guaranteed for an ambient temperature Ta of 40°C

6. The technical data in the instruction leaflet has priority over the technical data in the catalogue or brochures.
7. Xicato gives a 5 year warranty on these led modules when used and connected correctly.

AANDACHTSPUNTEN BIJ INSTALLATIE LEDMODULES

1. Onze spots dienen geplaatst te worden door een **erkend installateur!**
2. Het gele oppervlak van de led module (fosforlaag) niet aanraken met de vingers zowel in afgekoelde als warme toestand!
3. **Bij aansluiting van de spots steeds spanning uitschakelen!** Eerst de volledige bekabeling, de led modules en de led driver aanschakelen, pas daarna de schakelaar terug aanzetten op netstroom.
4. Zorg voor voldoende ruimte rondom de led module, want oververhitting= vermindering levensduur en andere kleurweergave!

A. INBOUWSPOTS IN VALS PLAFOND:

Zorg ervoor dat de spot op voldoende afstand zit van de isolatie en dat de koelvinnen niet bedekt worden. Deze laatste zorgen immers voor de afkoeling van de led module.

B. INBOUWSPOTS IN GEWELVEN OF VOLLE BETON:

Zorg ervoor dat er voldoende ruimte boven de spot wordt voorzien zodanig dat er voldoende luchtcirculatie is rondom de koelvinnen.

Drivers kunnen eventueel op afstand geplaatst worden. (zie pg 4 max. distance driver led)

5. Toestellen zijn gewaarborgd tot een omgevings-temperatuur Ta van 40°C

6. De technische gegevens in de bijsluiters hebben altijd voorrang op de technische gegevens in de catalogoog.
7. Xicato geeft 5 jaar garantie op de ledmodules bij correcte uitvoering en aansluiting!

Xicato

Datasheet: XTM LED Module, Standaard

SERIES	Modules	Drive current	Forward Voltage			Power Consumption	Lumen Output	Efficacy (Typical)	Module thermal power
		mA	Min	Typical	Max	W	Lm	Lm/W	W
	1300lm XTM1980xx13CCA XTM19V83013CCA	700	12.3	13.6	18.0	9.5	1300	137	5.4
		500	12.0	13.2	17.5	6.6	965	146	3.5
		350	11.7	12.9	17.2	4.5	720	159	2.2
	2000 lm XTM1980xx20CCA XTM19V83020CCA	700	19.8	21.7	27.0	15.2	2000	132	8.8
		500	19.2	21.1	26.3	10.6	1490	141	5.8
		350	18.7	20.6	25.8	7.2	1105	153	3.7

DRIVER CONSTANT VOLTAGE (MAX. 70W -24V-DC)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	0,75 mm ²	1 mm ²	1,5 mm ²	2,5 mm ²
DRIVER CONSTANT VOLTAGE (MAX. 150W -24V-DC/ 70W 12V)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	1,5 mm ²	2,5 mm ²	4 mm ²	4 mm ²
DRIVER CONSTANT CURRENT (350mA - 500mA)				
DISTANCE	5 m	10 m	20 m	50 m
CABLE SECTIE	0,25 mm ²	0,25 mm ²	0,5 mm ²	1 mm ²
DRIVER CONSTANT CURRENT (700mA - 1A)				
DISTANCE	5 m	10 m	20 m	50 m
CABLE SECTIE	0,5 mm ²	0,5 mm ²	1 mm ²	2,5 mm ²
DRIVER CONSTANT CURRENT (1,2A - 2A)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	0,75 mm ²	1 mm ²	1,5 mm ²	2,5 mm ²
DRIVER CONSTANT CURRENT (350mA - 500mA)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	0,25 mm ²	0,25 mm ²	0,5 mm ²	-
DIMMABLE DRIVER (700mA - 1A)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	0,5 mm ²	0,5 mm ²	1 mm ²	-
DIMMABLE DRIVER (1,2A - 2A)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	1 mm ²	1 mm ²	2,5 mm ²	-




1229.1300.S1/.. - PIVOT XICATO





=700mA    IP20    0,5 m  



semi built-in/up









downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED

Lamp type
 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
 Ø126  38° reflector
 120  75

Ref cat (STD)	
1229.1300.S1.1M	NW WW
1229.1300.S1.2M	NW WW
1229.1300.S1.29	NW WW




1229.1300.S2/.. - PIVOT XICATO

=700mA    IP20    0,5 m  



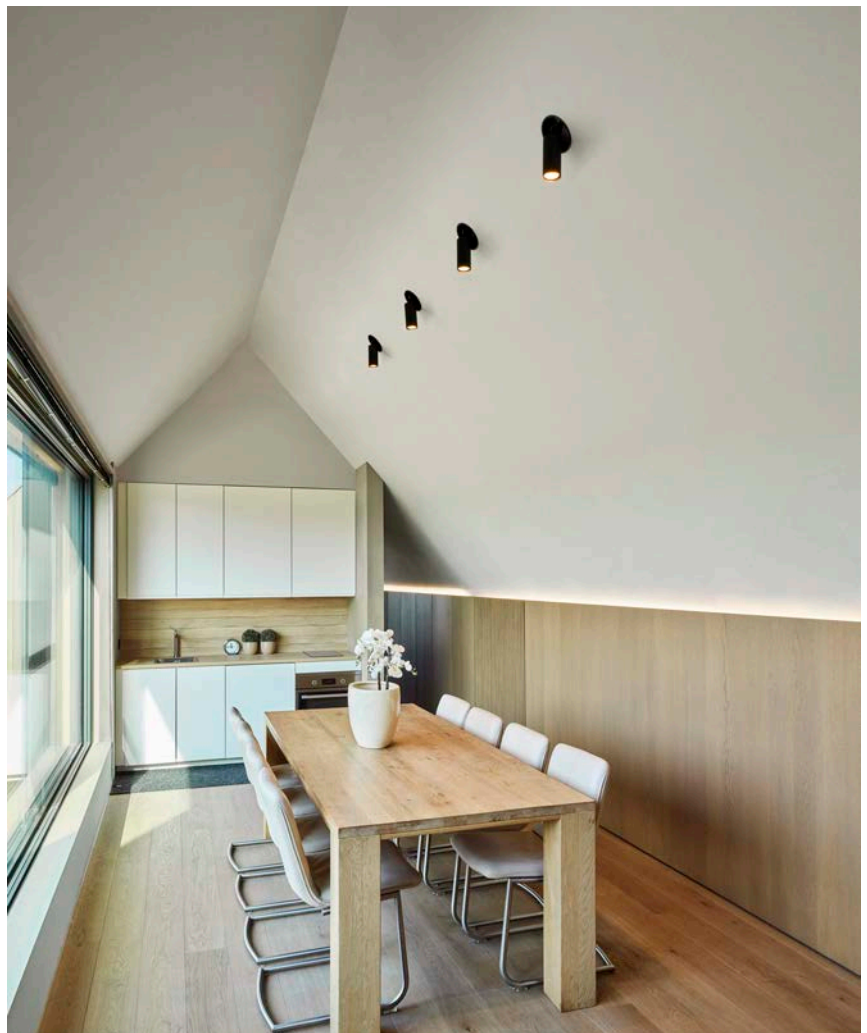
semi built-in/up

downlight - round - directional - without LED driver
Einbaustrahler - rund - schwenkbar - ohne Driver LED




Lamp type
 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
 Ø126  38° reflector
 120  75

Ref cat (STD)	
1229.1300.S2.1M	NW WW
1229.1300.S2.2M	NW WW
1229.1300.S2.29	NW WW





1571.S1/.. - CAMELEON XICATO LED

=700mA    S1 IP20    0,3500 0,5 m  05.20.50 



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED






Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø89xH120  90° reflector
Ø80  125

Ref cat (STD)	
1571.S1.1M	NW WW
1571.S1.2M	NW WW
1571.S1.14	NW WW
1571.S1.28	NW WW
1571.S1.45	NW WW



built-in

1571.S2/.. - CAMELEON XICATO LED

=700mA    S2 IP20    0,3100 0,5 m  05.20.50 



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED






Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø89xH120  90° reflector
Ø80  125

Ref cat (STD)	
1571.S2.1M	NW WW
1571.S2.2M	NW WW
1571.S2.14	NW WW
1571.S2.28	NW WW
1571.S2.45	NW WW



built-in

1572.S1/.. - CAMELEON XICATO LED

=700mA    S1 IP20    0,2800 0,5 m  05.20.50 



downlight - round - fixed - down - conical - without LED driver
Einbaustrahler - rund - fest - down - konisch - ohne Driver LED






Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø89xH120  90° reflector
Ø80  125

Ref cat (STD)	
1572.S1.1M	NW WW
1572.S1.2M	NW WW
1572.S1.14	NW WW
1572.S1.28	NW WW
1572.S1.45	NW WW



built-in



1572.S2/.. - CAMELEON XICATO LED

=700mA    S2 IP20    0,3100 0,5 m  05.20.50 



downlight - round - fixed - down - conical - without LED driver
Einbaustrahler - rund - fest - down - konisch - ohne Driver LED

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø89xH120  90° reflector
Ø80  125

Options
TR122260 - MULTI DRIVER

Ref cat (STD)	
1572.S2.1M	NW WW
1572.S2.2M	NW WW
1572.S2.14	NW WW
1572.S2.28	NW WW
1572.S2.45	NW WW

built-in




1573.S1/.. - CAMELEON XICATO LED

=700mA    IP20     







downlight - round - fixed - down - conical - without LED driver
Einbaustrahler - rund - fest - down - konisch - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions

 Ø89xH120  95° reflector
 Ø80  125


Ref cat (STD)

1573.S1.1M	NW WW
1573.S1.2M	NW WW
1573.S1.14	NW WW
1573.S1.28	NW WW
1573.S1.45	NW WW

built-in




1573.S2/.. - CAMELEON XICATO LED

=700mA    IP20     







downlight - round - fixed - down - conical - without LED driver
Einbaustrahler - rund - fest - down - konisch - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions









 Ø89xH120  95° reflector
 Ø80  125


Ref cat (STD)

1573.S2.1M	NW WW
1573.S2.2M	NW WW
1573.S2.14	NW WW
1573.S2.28	NW WW
1573.S2.45	NW WW

built-in




1574.S1/.. - CAMELEON XICATO LED

=700mA    IP44      







downlight - round - fixed - down - with plexiglass - without LED driver
Einbaustrahler - rund - fest - down - mit Plexiglas - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions

 Ø89xH120  120° reflector
 Ø80  125









Ref cat (STD)


1574.S1.1M	NW WW
1574.S1.2M	NW WW
1574.S1.14	NW WW
1574.S1.28	NW WW
1574.S1.45	NW WW

built-in

color 14 not in humid environment
Farbe 14 nicht geeignet für feuchte Umgebung



1574.S2/.. - CAMELEON XICATO LED

=700mA    IP44      







downlight - round - fixed - down - with plexiglass - without LED driver
Einbaustrahler - rund - fest - down - mit Plexiglas - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions

 Ø89xH120  120° reflector
 Ø80  125

Ref cat (STD)

1574.S2.1M	NW WW
1574.S2.2M	NW WW
1574.S2.14	NW WW
1574.S2.28	NW WW
1574.S2.45	NW WW

Options


87500387 - TRIDONIC DRIVER

built-in

color 14 not in humid environment
Farbe 14 nicht geeignet für feuchte Umgebung

1576.S1/.. - CAMELEON XICATO LED

=700mA    IP20     







downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions

 Ø89xH120  70° reflector
 Ø80  125


Ref cat (STD)

1576.S1.1M	NW WW
1576.S1.2M	NW WW
1576.S1.14	NW WW
1576.S1.28	NW WW
1576.S1.45	NW WW

built-in




1576.S2/.. - CAMELEON XICATO LED

=700mA    IP20     







downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

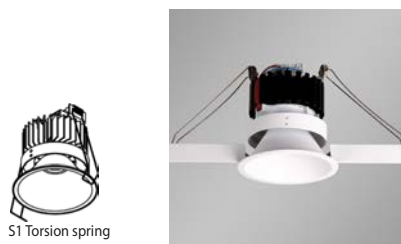
Dimensions

 Ø89xH120  70° reflector
 Ø80  125

Ref cat (STD)

1576.S2.1M	NW WW
1576.S2.2M	NW WW
1576.S2.14	NW WW
1576.S2.28	NW WW
1576.S2.45	NW WW

built-in







1575.S1/.. - CAMELEON XICATO LED

=700mA    S1 IP20    0,3500  0,5 m  



downlight - round - directional - down - without LED driver
Einbaustrahler - rund - schwenkbar - down - ohne Driver LED

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA


Dimensions
Ø89xH120  60° reflector
Ø80  125

Ref cat (STD)	
1575.S1.1M	NW WW
1575.S1.2M	NW WW
1575.S1.14	NW WW
1575.S1.29	NW WW
1575.S1.45	NW WW
1575.S1.55	NW WW
1575.S1.59	NW WW



built-in



1575.S2/.. - CAMELEON XICATO LED

=700mA    S2 IP20    0,3500  0,5 m  



downlight - round - directional - down - without LED driver
Einbaustrahler - rund - schwenkbar - down - ohne Driver LED

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø89xH120  60° reflector
Ø80  125

Ref cat (STD)	
1575.S2.1M	NW WW
1575.S2.2M	NW WW
1575.S2.14	NW WW
1575.S2.29	NW WW
1575.S2.45	NW WW
1575.S2.55	NW WW
1575.S2.59	NW WW

built-in





5221.S1/.. - FLOU XICATO

=700mA IP20 0,4100 0,5 m



downlight - round - fixed - down - with led - without LED driver
 Einbaustrahler - rund - fest - down - mit Led - ohne Driver LED

Lamp type
 1x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions
 Ø90xH105 30° reflector
 Ø80 110

Ref cat (STD)	
5221.S1.1M	NW WW
5221.S1.2M	NW WW
5221.S1.14	NW WW
5221.S1.45	NW WW

built-in

5221.S2/.. - FLOU XICATO

=700mA IP20 0,4100 0,5 m



downlight - round - fixed - down - with led - without LED driver
 Einbaustrahler - rund - fest - down - mit Led - ohne Driver LED

Lamp type
 1x Led 1300lm CRI80 max. 9,5W - 700mA

Dimensions
 Ø90xH105 30° reflector
 Ø80 110

Ref cat (STD)	
5221.S2.1M	NW WW
5221.S2.2M	NW WW
5221.S2.14	NW WW
5221.S2.45	NW WW

built-in

Xicato

Datasheet: XTM LED Module, Designer Series

LES	Module	Current	Forward Voltage			Typ. Power Consumption	Lumen Output	Efficacy (Typical)
		mA	Min	Typical	Max	W	Lm	Lm/W
19mm	1300lm	700	14.8	16.3	18.0	11.4	1300	114
		500	14.4	15.8	17.5	7.9	965	122
		350	14.0	15.5	17.2	5.4	720	133
	2000 lm	700	22.2	24.4	30.0	17.1	2000	117
		500	21.6	25.8	31.5	12.9	1490	116
		350	21.0	23.2	28.6	8.1	1105	136
	3000 lm	1050	22.2	24.4	30.0	25.7	3000	117
		700	21.5	23.6	29.1	16.5	2100	127
		500	21.0	23.1	28.6	11.6	1585	137
		350	20.6	22.8	28.1	8.0	1195	150
	4500 lm	1400	28.6	29.9	36.0	41.8	4500	108
		1050	27.7	29.0	35.1	30.5	3465	114
		700	27.1	28.4	34.3	19.9	2430	122
		500	26.6	27.9	33.8	13.9	1827	131

DRIVER CONSTANT VOLTAGE (MAX. 70W -24V-DC)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	0,75 mm ²	1 mm ²	1,5 mm ²	2,5 mm ²
DRIVER CONSTANT VOLTAGE (MAX. 150W -24V-DC/ 70W 12V)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	1,5 mm ²	2,5 mm ²	4 mm ²	4 mm ²
DRIVER CONSTANT CURRENT (350mA - 500mA)				
DISTANCE	5 m	10 m	20 m	50 m
CABLE SECTIE	0,25 mm ²	0,25 mm ²	0,5 mm ²	1 mm ²
DRIVER CONSTANT CURRENT (700mA - 1A)				
DISTANCE	5 m	10 m	20 m	50 m
CABLE SECTIE	0,5 mm ²	0,5 mm ²	1 mm ²	2,5 mm ²
DRIVER CONSTANT CURRENT (1,2A - 2A)				
DISTANCE	5 m	10 m	20 m	30 m
CABLE SECTIE	0,75 mm ²	1 mm ²	1,5 mm ²	2,5 mm ²
DRIVER CONSTANT CURRENT (350mA - 500mA)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	0,25 mm ²	0,25 mm ²	0,5 mm ²	-
DIMMABLE DRIVER (700mA - 1A)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	0,5 mm ²	0,5 mm ²	1 mm ²	-
DIMMABLE DRIVER (1,2A - 2A)				
DISTANCE	5 m	10 m	15 m	-
CABLE SECTIE	1 mm ²	1 mm ²	2,5 mm ²	-

XTM.1300.10024.S1/.. - LUXOR Ø70

=700mA IP20 0,5 m



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø80xH90-100 40° reflector

Ø70

Reflector - Ø50

Ref

XTM.1300.10024.S1.1M NW | WW
XTM.1300.10024.S1.1M.2M NW | WW
XTM.1300.10024.S1.2M NW | WW
XTM.1300.10024.S1.14 NW | WW

built-in

XTM.1300.10024.S2/.. - LUXOR Ø70

=700mA IP20 0,2500



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø80xH90-100 40° reflector

Ø70

Reflector - Ø50

Ref

XTM.1300.10024.S2.1M NW | WW
XTM.1300.10024.S2.1M.2M NW | WW
XTM.1300.10024.S2.2M NW | WW
XTM.1300.10024.S2.14 NW | WW

built-in

XTM.1300.10028.S1/.. - LUXOR Ø70

=700mA IP20 0,5 m



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø80xH120 40° reflector

Ø70

Reflector - Ø50

Ref

XTM.1300.10028.S1.1M NW | WW
XTM.1300.10028.S1.1M.2M NW | WW
XTM.1300.10028.S1.2M NW | WW
XTM.1300.10028.S1.14 NW | WW

built-in

XTM.1300.10028.S2/.. - LUXOR Ø70

=700mA IP20 0,5 m



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø80xH120 40° reflector

Ø70











Reflector - Ø50

Ref

XTM.1300.10028.S2.1M NW | WW
XTM.1300.10028.S2.1M.2M NW | WW
XTM.1300.10028.S2.2M NW | WW
XTM.1300.10028.S2.14 NW | WW

built-in

XTM.1300.10026.S1/.. - LUXOR Ø70

=700mA    S1 IP20     0,5 m  05.20.50  





downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver
LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø80xH100-120  40° reflector

 Ø70











Reflector - Ø50

Ref

XTM.1300.10026.S1.1M	NW WW
XTM.1300.10026.S1.1M.2M	NW WW
XTM.1300.10026.S1.2M	NW WW
XTM.1300.10026.S1.14	NW WW

built-in



XTM.1300.10026.S2/.. - LUXOR Ø70

=700mA    S2 IP20     0,5 m  05.20.50  





downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver
LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø80xH100-120  40° reflector

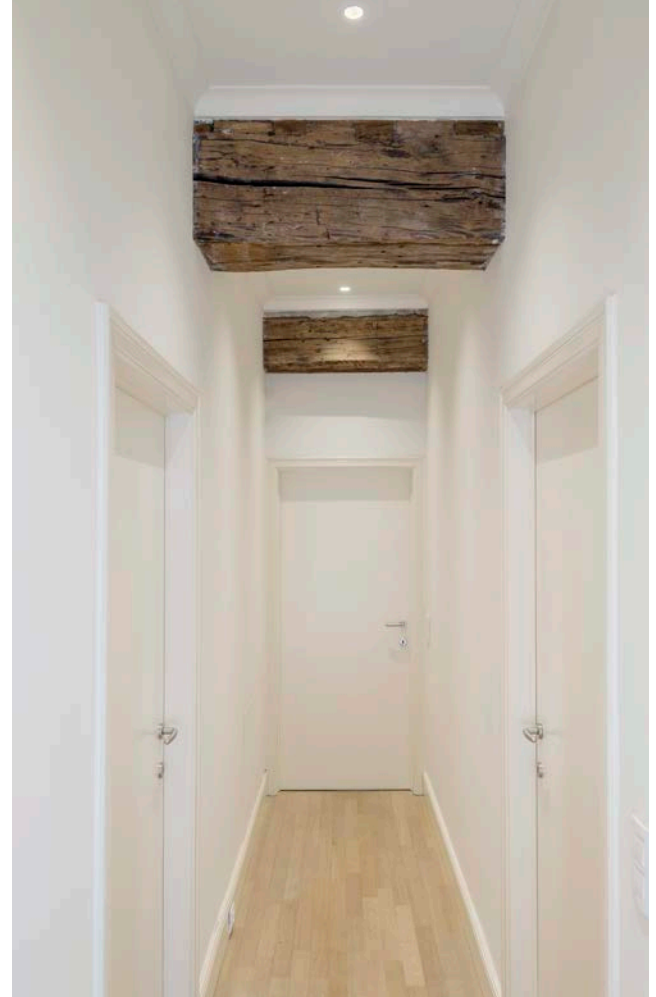
 Ø70

Reflector - Ø50

Ref


XTM.1300.10026.S2.1M	NW WW
XTM.1300.10026.S2.1M.2M	NW WW
XTM.1300.10026.S2.2M	NW WW
XTM.1300.10026.S2.14	NW WW

built-in



XTM.1300.10025.S1/.. - LUXOR Ø70

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
 1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions
 L80xB80xH90-100 40° reflector
 Ø70
 Reflector - Ø50


Ref

XTM.1300.10025.S1.1M	NW WW
XTM.1300.10025.S1.1M.2M	NW WW
XTM.1300.10025.S1.2M	NW WW
XTM.1300.10025.S1.14	NW WW

built-in

XTM.1300.10025.S2/.. - LUXOR Ø70

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
 1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions
 L80xB80xH90-100 40° reflector
 Ø70
 Reflector - Ø50

Ref

XTM.1300.10025.S2.1M	NW WW
XTM.1300.10025.S2.1M.2M	NW WW
XTM.1300.10025.S2.2M	NW WW
XTM.1300.10025.S2.14	NW WW

built-in

XTM.1300.10029.S1/.. - LUXOR Ø70

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
 1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions
 L80xB80xH120 40° reflector
 Ø70
 Reflector - Ø50

Ref

XTM.1300.10029.S1.1M	NW WW
XTM.1300.10029.S1.1M.2M	NW WW
XTM.1300.10029.S1.2M	NW WW
XTM.1300.10029.S1.14	NW WW

built-in

XTM.1300.10029.S2/.. - LUXOR Ø70

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
 1x LED 1300lm CRI90 max. 11,4W 700mA










Dimensions
 L80xB80xH120 40° reflector
 Ø70
 Reflector - Ø50

Ref

XTM.1300.10029.S2.1M	NW WW
XTM.1300.10029.S2.1M.2M	NW WW
XTM.1300.10029.S2.2M	NW WW
XTM.1300.10029.S2.14	NW WW

built-in

XTM.1300.10027.S1/.. - LUXOR Ø70

=700mA    S1 IP20     1 m  05.20.50 





downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L80xB80xH120  40° reflector

 Ø70










Reflector - Ø50

Ref

XTM.1300.10027.S1.1M NW | WW
XTM.1300.10027.S1.1M.2M NW | WW
XTM.1300.10027.S1.2M NW | WW
XTM.1300.10027.S1.14 NW | WW

built-in

XTM.1300.10027.S2/.. - LUXOR Ø70

=700mA    S2 IP20     1 m  05.20.50 





downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L80xB80xH120  40° reflector

 Ø70

Reflector - Ø50

Ref

XTM.1300.10027.S2.1M NW | WW
XTM.1300.10027.S2.1M.2M NW | WW
XTM.1300.10027.S2.2M NW | WW
XTM.1300.10027.S2.14 NW | WW

built-in




XTM.1300.10033.S1/.. - LUXOR Ø70

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L155xB80xH100  40° reflector
Ø2X70  78
Reflector - Ø50

Ref

XTM.1300.10033.S1.1M	NW WW
XTM.1300.10033.S1.1M.2M	NW WW
XTM.1300.10033.S1.2M	NW WW
XTM.1300.10033.S1.14	NW WW


built-in



XTM.1300.10034.S1/.. - LUXOR Ø70

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA






Dimensions
L155xB80xH100  40° reflector
Ø2X70  78
Reflector - Ø50

Ref

XTM.1300.10034.S1.1M	NW WW
XTM.1300.10034.S1.1M.2M	NW WW
XTM.1300.10034.S1.2M	NW WW
XTM.1300.10034.S1.14	NW WW


built-in



XTM.1300.10035.S1/.. - LUXOR Ø70

=700mA    IP20     



downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L155xB80xH120  40° reflector
Ø2X70  78
Reflector - Ø50

Ref

XTM.1300.10035.S1.1M	NW WW
XTM.1300.10035.S1.1M.2M	NW WW
XTM.1300.10035.S1.2M	NW WW
XTM.1300.10035.S1.14	NW WW

built-in

XTM.1300.10010.S1/.. - LUXOR Ø80

=700mA IP20



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø90xH100 40° reflector

Ø80

Reflector - Ø50

Ref

XTM.1300.10010.S1.1M NW | WW
XTM.1300.10010.S1.1M.2M NW | WW
XTM.1300.10010.S1.2M NW | WW
XTM.1300.10010.S1.14 NW | WW

built-in

XTM.1300.10010.S2/.. - LUXOR Ø80

=700mA IP20



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø90xH100 40° reflector

Ø80

Reflector - Ø50

Ref cat (STD)

XTM.1300.10010.S2.1M NW | WW
XTM.1300.10010.S2.1M.2M NW | WW
XTM.1300.10010.S2.2M NW | WW
XTM.1300.10010.S2.14 NW | WW

built-in

XTM.1300.10017.S1/.. - LUXOR Ø80

=700mA IP20



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø90xH100 40° reflector

Ø80 120

Reflector - Ø50

Ref cat (STD)

XTM.1300.10017.S1.1M NW | WW
XTM.1300.10017.S1.2M NW | WW
XTM.1300.10017.S1.14 NW | WW

built-in

XTM.1300.10017.S2/.. - LUXOR Ø80

=700mA IP20



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

Ø90xH100 40° reflector

Ø80 120






Reflector - Ø50

Ref cat (STD)

XTM.1300.10017.S2.1M NW | WW
XTM.1300.10017.S2.2M NW | WW
XTM.1300.10017.S2.14 NW | WW

built-in

XTM.1300.10014.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø90xH100  40° reflector

 Ø80  120


Reflector - Ø50

Ref

XTM.1300.10014.S1.1M	NW WW
XTM.1300.10014.S1.2M	NW WW
XTM.1300.10014.S1.14	NW WW

built-in

XTM.1300.10014.S2/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamptype

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø90xH100  40° reflector

 Ø80  120







Reflector - Ø50

Ref

XTM.1300.10014.S2.1M	NW WW
XTM.1300.10014.S2.2M	NW WW
XTM.1300.10014.S2.14	NW WW

built-in


XTM.1300.10011.S1/.. - LUXOR Ø80

=700mA    IP20      



downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver LED

Lamptype

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø90xH120  40° reflector

 Ø80









Reflector - Ø50

Ref

XTM.1300.10011.S1.1M	NW WW
XTM.1300.10011.S1.1M.2M	NW WW
XTM.1300.10011.S1.2M	NW WW
XTM.1300.10011.S1.14	NW WW

built-in

XTM.1300.10011.S2/.. - LUXOR Ø80

=700mA    IP20      





downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver LED

Lamptype

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 Ø90xH120  40° reflector

 Ø80

Reflector - Ø50


Ref

XTM.1300.10011.S2.1M	NW WW
XTM.1300.10011.S2.1M.2M	NW WW
XTM.1300.10011.S2.2M	NW WW
XTM.1300.10011.S2.14	NW WW

built-in

XTM.1300.10012.S1/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamptype
 1x LED 1300lm CRI90 max. 11,4W 700mA


Dimensions
 L100xB100xH100 40° reflector
 Ø80
 Reflector - Ø50

Ref
 XTM.1300.10012.S1.1M NW | WW
 XTM.1300.10012.S1.1M.2M NW | WW
 XTM.1300.10012.S1.2M NW | WW
 XTM.1300.10012.S1.14 NW | WW

built-in

XTM.1300.10012.S2/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamptype
 1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions
 L100xB100xH100 40° reflector
 Ø80
 Reflector - Ø50

Ref
 XTM.1300.10012.S2.1M NW | WW
 XTM.1300.10012.S2.1M.2M NW | WW
 XTM.1300.10012.S2.2M NW | WW
 XTM.1300.10012.S2.14 NW | WW

built-in

XTM.1300.10018.S1/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamptype
 1x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions
 L100xB100xH100 40° reflector
 Ø80 120
 Reflector - Ø50

Ref cat (STD)
 XTM.1300.10018.S1.1M NW | WW
 XTM.1300.10018.S1.2M NW | WW
 XTM.1300.10018.S1.14 NW | WW

built-in

XTM.1300.10018.S2/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED







Lamptype
 1x LED 1300lm CRI90 max. 11,4W 700mA


Dimensions
 L100xB100xH100 40° reflector
 Ø80 120
 Reflector - Ø50

Ref cat (STD)
 XTM.1300.10018.S2.1M NW | WW
 XTM.1300.10018.S2.2M NW | WW
 XTM.1300.10018.S2.14 NW | WW


built-in



XTM.1300.10015.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L100xB100xH100  40° reflector
Ø80  120
Reflector - Ø50

Ref
XTM.1300.10015.S1.1M NW | WW
XTM.1300.10015.S1.2M NW | WW
XTM.1300.10015.S1.14 NW | WW


built-in



XTM.1300.10015.S2/.. - LUXOR Ø80

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED





Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L100xB100xH100  40° reflector
Ø80  120
Reflector - Ø50

Ref
XTM.1300.10015.S2.1M NW | WW
XTM.1300.10015.S2.2M NW | WW
XTM.1300.10015.S2.14 NW | WW


built-in


XTM.1300.10013.S1/.. - LUXOR Ø80

=700mA    IP20      



downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED








Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L100xB100xH120  40° reflector
Ø80
Reflector - Ø50

Ref
XTM.1300.10013.S1.1M NW | WW
XTM.1300.10013.S1.1M.2M NW | WW
XTM.1300.10013.S1.2M NW | WW
XTM.1300.10013.S1.14 NW | WW


built-in


XTM.1300.10013.S2/.. - LUXOR Ø80

=700mA    IP20      



downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA


Dimensions
L100xB100xH120  40° reflector
Ø80
Reflector - Ø50

Ref
XTM.1300.10013.S2.1M NW | WW
XTM.1300.10013.S2.1M.2M NW | WW
XTM.1300.10013.S2.2M NW | WW
XTM.1300.10013.S2.14 NW | WW

built-in

XTM.1300.10036.S1/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

2x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

L180xB100xH100 40° reflector

2xØ80 85

Reflector - Ø50


Ref

XTM.1300.10036.S1.1M NW | WW
XTM.1300.10036.S1.1M.2M NW | WW
XTM.1300.10036.S1.2M NW | WW
XTM.1300.10036.S1.14 NW | WW

built-in

XTM.1300.10036.S2/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

2x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

L180xB100xH100 40° reflector

2xØ80 85

Reflector - Ø50

Ref

XTM.1300.10036.S2.1M NW | WW
XTM.1300.10036.S2.1M.2M NW | WW
XTM.1300.10036.S2.2M NW | WW
XTM.1300.10036.S2.14 NW | WW

built-in

XTM.1300.10043.S1/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

2x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

L180xB100xH100 40° reflector

2xØ80 85

Reflector - Ø50

Ref cat (STD)

XTM.1300.10043.S1.1M NW | WW
XTM.1300.10043.S1.1M.2M NW | WW
XTM.1300.10043.S1.2M NW | WW
XTM.1300.10043.S1.14 NW | WW

built-in

XTM.1300.10043.S2/.. - LUXOR Ø80

=700mA IP20



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

2x LED 1300lm CRI90 max. 11,4W 700mA

Dimensions

L180xB100xH100 40° reflector

2xØ80 85




Reflector - Ø50

Ref cat (STD)

XTM.1300.10043.S2.1M NW | WW
XTM.1300.10043.S2.1M.2M NW | WW
XTM.1300.10043.S2.2M NW | WW
XTM.1300.10043.S2.14 NW | WW


built-in



XTM.1300.10038.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L180xB100xH100  40° reflector
2xØ80  85
Reflector - Ø50

Ref cat (STD)

XTM.1300.10038.S1.1M	NW WW
XTM.1300.10038.S1.1M.2M	NW WW
XTM.1300.10038.S1.2M	NW WW
XTM.1300.10038.S1.14	NW WW


built-in



XTM.1300.10038.S2/.. - LUXOR Ø80

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA





Dimensions
L180xB100xH100  40° reflector
2xØ80  85
Reflector - Ø50

Ref cat (STD)

XTM.1300.10038.S2.1M	NW WW
XTM.1300.10038.S2.1M.2M	NW WW
XTM.1300.10038.S2.2M	NW WW
XTM.1300.10038.S2.14	NW WW


built-in



XTM.1300.10037.S1/.. - LUXOR Ø80

=700mA    IP20      



downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA





Dimensions
L180xB100xH120  40° reflector
2xØ80  85
Reflector - Ø50

Ref

XTM.1300.10037.S1.1M	NW WW
XTM.1300.10037.S1.1M.2M	NW WW
XTM.1300.10037.S1.2M	NW WW
XTM.1300.10037.S1.14	NW WW

built-in



XTM.1300.10037.S2/.. - LUXOR Ø80

=700mA    IP20      



downlight - square - directional - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA





Dimensions
L180xB100xH120  40° reflector
2xØ80  85
Reflector - Ø50


Ref

XTM.1300.10037.S2.1M	NW WW
XTM.1300.10037.S2.1M.2M	NW WW
XTM.1300.10037.S2.2M	NW WW
XTM.1300.10037.S2.14	NW WW

built-in


XTM.1300.10046.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L180xB100xH100  40° reflector

 2xØ80  85


Reflector - Ø50

Ref cat (STD)

XTM.1300.10046.S1.1M	NW WW
XTM.1300.10046.S1.1M.2M	NW WW
XTM.1300.10046.S1.2M	NW WW
XTM.1300.10046.S1.14	NW WW

built-in

XTM.1300.10046.S2/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L180xB100xH100  40° reflector

 2xØ80  85


Reflector - Ø50

Ref cat (STD)

XTM.1300.10046.S2.1M	NW WW
XTM.1300.10046.S2.1M.2M	NW WW
XTM.1300.10046.S2.2M	NW WW
XTM.1300.10046.S2.14	NW WW

built-in



XTM.1300.10044.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L180xB100xH100  40° reflector

 2xØ80  85

Reflector - Ø50

Ref cat (STD)

XTM.1300.10044.S1.1M	NW WW
XTM.1300.10044.S1.1M.2M	NW WW
XTM.1300.10044.S1.2M	NW WW
XTM.1300.10044.S1.14	NW WW

built-in

XTM.1300.10044.S2/.. - LUXOR Ø80

=700mA    IP20     





downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L180xB100xH100  40° reflector

 2xØ80  85





Reflector - Ø50

Ref cat (STD)

XTM.1300.10044.S2.1M	NW WW
XTM.1300.10044.S2.1M.2M	NW WW
XTM.1300.10044.S2.2M	NW WW
XTM.1300.10044.S2.14	NW WW


built-in



XTM.1300.10048.S1/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L180xB100xH100  40° reflector
2xØ80  85
Reflector - Ø50

Ref cat (STD)

XTM.1300.10048.S1.1M	NW WW
XTM.1300.10048.S1.1M.2M	NW WW
XTM.1300.10048.S1.2M	NW WW
XTM.1300.10048.S1.14	NW WW


built-in



XTM.1300.10048.S2/.. - LUXOR Ø80

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA







Dimensions
L180xB100xH100  40° reflector
2xØ80  85
Reflector - Ø50

Ref cat (STD)

XTM.1300.10048.S2.1M	NW WW
XTM.1300.10048.S2.1M.2M	NW WW
XTM.1300.10048.S2.2M	NW WW
XTM.1300.10048.S2.14	NW WW


built-in



XTM.1300.10047.S1/.. - LUXOR Ø80

=700mA    IP20      



downlight - round - directional - oval - with led - without LED driver
Einbaustrahler - rund - schwenkbar - oval - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA









Dimensions
L180xB100xH120  40° reflector
2xØ80  85
Reflector - Ø50

Ref

XTM.1300.10047.S1.1M	NW WW
XTM.1300.10047.S1.1M.2M	NW WW
XTM.1300.10047.S1.2M	NW WW
XTM.1300.10047.S1.14	NW WW


built-in



XTM.1300.10047.S2/.. - LUXOR Ø80

=700mA    IP20      



downlight - round - directional - oval - with led - without LED driver
Einbaustrahler - rund - schwenkbar - oval - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA








Dimensions
L180xB100xH120  40° reflector
2xØ80  85
Reflector - Ø50

Ref

XTM.1300.10047.S2.1M	NW WW
XTM.1300.10047.S2.1M.2M	NW WW
XTM.1300.10047.S2.2M	NW WW
XTM.1300.10047.S2.14	NW WW


built-in


XTM.1300.10019.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
Ø109xH110  40° reflector
Ø100
Reflector - Ø70

Ref	
XTM.1300.10019.S1.1M	NW WW
XTM.1300.10019.S1.1M.2M	NW WW
XTM.1300.10019.S1.2M	NW WW
XTM.1300.10019.S1.14	NW WW


built-in

XTM.1300.10019.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED



Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
Ø109xH110  40° reflector
Ø100
Reflector - Ø70

Ref	
XTM.1300.10019.S2.1M	NW WW
XTM.1300.10019.S2.1M.2M	NW WW
XTM.1300.10019.S2.2M	NW WW
XTM.1300.10019.S2.14	NW WW


built-in


XTM.1300.10053.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED

Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
Ø109xH120  40° reflector
Ø100  140
Reflector - Ø70

Ref	
XTM.1300.10053.S1.1M	NW WW
XTM.1300.10053.S1.2M	NW WW
XTM.1300.10053.S1.14	NW WW


built-in



XTM.1300.10053.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - with led - without LED driver
Einbaustrahler - rund - fest - mit Led - ohne Driver LED









Lamp type
1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
Ø109xH120  40° reflector
Ø100  140
Reflector - Ø70

Ref	
XTM.1300.10053.S2.1M	NW WW
XTM.1300.10053.S2.2M	NW WW
XTM.1300.10053.S2.14	NW WW

built-in

XTM.1300.10020.S1/.. - LUXOR Ø100

=700mA    S1 IP20    0.5 m  05.20.50 






downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions







 Ø109xH120  40° reflector
 Ø100
Reflector - Ø70

Ref

XTM.1300.10020.S1.1M CW | NW | WW
XTM.1300.10020.S1.1M.2M NW | WW
XTM.1300.10020.S1.2M NW | WW
XTM.1300.10020.S1.14 NW | WW

built-in

XTM.1300.10020.S2/.. - LUXOR Ø100

=700mA    S2 IP20    0.5 m  05.20.50 






downlight - round - directional - with led - without LED driver
Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions


 Ø109xH120  40° reflector
 Ø100
Reflector - Ø70


Ref

XTM.1300.10020.S2.1M NW | WW
XTM.1300.10020.S2.1M.2M NW | WW
XTM.1300.10020.S2.2M NW | WW
XTM.1300.10020.S2.14 NW | WW

built-in

XTM.1300.10039.S1/.. - LUXOR Ø100

=700mA    S1 IP20    0.5 m  05.20.50 






downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L120xB120xH110  40° reflector
 Ø110
Reflector - Ø70

Ref cat (STD)

XTM.1300.10039.S1.1M NW | WW
XTM.1300.10039.S1.1M.2M NW | WW
XTM.1300.10039.S1.2M NW | WW
XTM.1300.10039.S1.14 NW | WW

built-in


XTM.1300.10039.S2/.. - LUXOR Ø100

=700mA    S2 IP20    0.5 m  05.20.50 





downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions









 L120xB120xH110  40° reflector
 Ø110
Reflector - Ø70


Ref

XTM.1300.10039.S2.1M NW | WW
XTM.1300.10039.S2.1M.2M NW | WW
XTM.1300.10039.S2.2M NW | WW
XTM.1300.10039.S2.14 NW | WW

built-in



XTM.1300.10054.S1/.. - LUXOR Ø80

=700mA    IP20     




downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L120xB120xH120  40° reflector

 Ø110  140

Reflector - Ø70

Ref









XTM.1300.10054.S1.1M NW | WW

XTM.1300.10054.S1.2M NW | WW

XTM.1300.10054.S1.14 NW | WW

built-in



XTM.1300.10054.S2/.. - LUXOR Ø80

=700mA    IP20     





downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L120xB120xH120  40° reflector

 Ø110  140

Reflector - Ø70

Ref

XTM.1300.10054.S2.1M NW | WW








XTM.1300.10054.S2.2M NW | WW

XTM.1300.10054.S2.14 NW | WW

built-in



XTM.1300.10040.S1/.. - LUXOR Ø100

=700mA    S1 IP20     0,5 m  05.20.50 





downlight - square - directional - with led - without LED driver
 Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L120xB120xH120  40° reflector

 Ø110










Reflector - Ø70

Ref cat (STD)

XTM.1300.10040.S1.1M NW | WW
 XTM.1300.10040.S1.1M.2M NW | WW
 XTM.1300.10040.S1.2M NW | WW
 XTM.1300.10040.S1.14 NW | WW

built-in

XTM.1300.10040.S2/.. - LUXOR Ø100

=700mA    S2 IP20     0,5 m  05.20.50 





downlight - square - directional - with led - without LED driver
 Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L120xB120xH120  40° reflector

 Ø110

Reflector - Ø70



Ref

XTM.1300.10040.S2.1M NW | WW
 XTM.1300.10040.S2.1M.2M NW | WW
 XTM.1300.10040.S2.2M NW | WW
 XTM.1300.10040.S2.14 NW | WW

built-in






XTM.1300.10049.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED



Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L240xB120xH110  40° reflector
2xØ110  120
Reflector - Ø70

Ref
XTM.1300.10049.S1.1M NW | WW
XTM.1300.10049.S1.1M.2M NW | WW
XTM.1300.10049.S1.2M NW | WW
XTM.1300.10049.S1.14 NW | WW


built-in



XTM.1300.10049.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED


Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L240xB120xH110  40° reflector
2xØ110  120
Reflector - Ø70

Ref
XTM.1300.10049.S2.1M NW | WW
XTM.1300.10049.S2.1M.2M NW | WW
XTM.1300.10049.S2.2M NW | WW
XTM.1300.10049.S2.14 NW | WW


built-in



XTM.1300.10056.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED

Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L240xB120xH110  40° reflector
2xØ110  120
Reflector - Ø70

Ref cat (STD)
XTM.1300.10056.S1.1M NW | WW
XTM.1300.10056.S1.1M.2M NW | WW
XTM.1300.10056.S1.2M NW | WW
XTM.1300.10056.S1.14 NW | WW


built-in



XTM.1300.10056.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - square - fixed - with led - without LED driver
Einbaustrahler - viereckig - fest - mit Led - ohne Driver LED






Lamp type
2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
L240xB120xH110  40° reflector
2xØ110  120
Reflector - Ø70

Ref cat (STD)
XTM.1300.10056.S2.1M NW | WW
XTM.1300.10056.S2.1M.2M NW | WW
XTM.1300.10056.S2.2M NW | WW
XTM.1300.10056.S2.14 NW | WW

built-in

XTM.1300.10050.S1/.. - LUXOR Ø100

=700mA    S1 IP20     0,5 m  05.20.50 





downlight - square - directional - with led - without LED driver
 Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L240xB120xH120  40° reflector

 2xØ110  Ø120










Reflector - Ø70

Ref

XTM.1300.10050.S1.1M	NW WW
XTM.1300.10050.S1.1M.2M	NW WW
XTM.1300.10050.S1.2M	NW WW
XTM.1300.10050.S1.14	NW WW

built-in

XTM.1300.10050.S2/.. - LUXOR Ø100

=700mA    S2 IP20     0,5 m  05.20.50 





downlight - square - directional - with led - without LED driver
 Einbaustrahler - viereckig - schwenkbar - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L240xB120xH120  40° reflector

 2xØ110  Ø120

Reflector - Ø70



Ref

XTM.1300.10050.S2.1M	NW WW
XTM.1300.10050.S2.1M.2M	NW WW
XTM.1300.10050.S2.2M	NW WW
XTM.1300.10050.S2.14	NW WW

built-in









XTM.1300.10051.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA


Dimensions
 L240xB120xH110  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref

XTM.1300.10051.S1.1M	NW WW
XTM.1300.10051.S1.1M.2M	NW WW
XTM.1300.10051.S1.2M	NW WW
XTM.1300.10051.S1.14	NW WW



built-in





XTM.1300.10051.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
 L240xB120xH110  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref

XTM.1300.10051.S2.1M	NW WW
XTM.1300.10051.S2.1M.2M	NW WW
XTM.1300.10051.S2.2M	NW WW
XTM.1300.10051.S2.14	NW WW



built-in





XTM.1300.10057.S1/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA


Dimensions
 L240xB120xH110  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref cat (STD)

XTM.1300.10057.S1.1M	NW WW
XTM.1300.10057.S1.1M.2M	NW WW
XTM.1300.10057.S1.2M	NW WW
XTM.1300.10057.S1.14	NW WW



built-in





XTM.1300.10057.S2/.. - LUXOR Ø100

=700mA    IP20     



downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA











Dimensions
 L240xB120xH110  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref cat (STD)

XTM.1300.10057.S2.1M	NW WW
XTM.1300.10057.S2.1M.2M	NW WW
XTM.1300.10057.S2.2M	NW WW
XTM.1300.10057.S2.14	NW WW


built-in



XTM.1300.10052.S1/.. - LUXOR Ø100

=700mA    S1 IP20     0.5 m  05.20.50  



downlight - round - directional - oval - with led - without LED driver
 Einbaustrahler - rund - schwenkbar - oval - mit Led - ohne Driver LED











Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
 L240xB120xH120  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref
 XTM.1300.10052.S1.1M NW | WW
 XTM.1300.10052.S1.1M.2M NW | WW
 XTM.1300.10052.S1.2M NW | WW
 XTM.1300.10052.S1.14 NW | WW


built-in



XTM.1300.10052.S2/.. - LUXOR Ø100

=700mA    S2 IP20     0.5 m  05.20.50  



downlight - round - directional - oval - with led - without LED driver
 Einbaustrahler - rund - schwenkbar - oval - mit Led - ohne Driver LED









Lamp type
 2x LED 1300lm CRI90 max. 11,4W  700mA


Dimensions
 L240xB120xH120  40° reflector
 2xØ110  120
 Reflector - Ø70

Ref
 XTM.1300.10052.S2.1M NW | WW
 XTM.1300.10052.S2.1M.2M NW | WW
 XTM.1300.10052.S2.2M NW | WW
 XTM.1300.10052.S2.14 NW | WW


built-in



XTM.1300.10021.S2/.. - LUXOR Ø122

=700mA    S2 IP20    1 m  05.20.50  



downlight - round - fixed - with led - without LED driver
 Einbaustrahler - rund - fest - mit Led - ohne Driver LED









Lamp type
 1x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions
 Ø130xH125  40° reflector
 Ø122  135
 Reflector - Ø111

Ref
 XTM.1300.10021.S2.1M NW | WW
 XTM.1300.10021.S2.2M NW | WW
 XTM.1300.10021.S2.14 NW | WW


built-in



XTM.1300.10022.S2/.. - LUXOR Ø135

=700mA    S2 IP20     1 m  05.20.50  



downlight - round - directional - with led - without LED driver
 Einbaustrahler - rund - schwenkbar - mit Led - ohne Driver LED









Lamp type
 1x LED 1300lm CRI90 max. 11,4W  700mA


Dimensions
 Ø150xH135  40° reflector
 Ø135  150
 Reflector - Ø111

Ref
 XTM.1300.10022.S2.1M NW | WW
 XTM.1300.10022.S2.2M NW | WW
 XTM.1300.10022.S2.14 NW | WW

built-in

XTM.1300.10055.S2/.. - LUXOR Ø2X130

=700mA    S2 IP20    1 m  05.20.50 





downlight - round - fixed - oval - with led - without LED driver
Einbaustrahler - rund - fest - oval - mit Led - ohne Driver LED

Lamp type

 2x LED 1300lm CRI90 max. 11,4W  700mA

Dimensions

 L270xB142xH135  40° reflector

 Ø2x130  JAL 135  130

Reflector - Ø111

Ref

XTM.1300.10055.S2.1M NW | WW

XTM.1300.10055.S2.2M NW | WW

built-in



1810.XTM/.. - OLIVIA XICATO



semi built-in and built-up ceiling light - directional - down - without LED driver
Halbeinbau und Halbaufbau Deckenleuchte - schwenkbar - down - ohne Driver LED

Lamp type

- 1x Led 965lm CRI80 max. 6,6W A - A+ 500mA
- 1x powered 350mA max. 1W A - A+ 350mA

Dimensions

Ø162xH100 38° reflector
Ø65 50

Materials

aluminium 14 | 1M | 2M | 11M

Ref cat (STD)

- 1810.XTM.1M.NW.B white tex
- 1810.XTM.1M.NW.NW white tex
- 1810.XTM.2M.NW.B black tex
- 1810.XTM.2M.NW.NW black tex
- 1810.XTM.11M.NW.B grey tex
- 1810.XTM.11M.NW.NW grey tex
- 1810.XTM.14.NW.B alu satin
- 1810.XTM.14.NW.NW alu satin

built-in
only dimmable on 2 circuits
nur dimmbar bei 2 Stromkreise

1808.XTM/.. - OLIVIA XICATO



semi built-in and built-up ceiling light - directional - down - without LED driver
Halbeinbau und Halbaufbau Deckenleuchte - schwenkbar - down - ohne Driver LED

Lamp type

- 1x Led 965lm CRI80 max. 6,6W A - A+ 500mA
- 1x powered 350mA max. 1W A - A+ 350mA

Dimensions

Ø165xH140 38° reflector
Ø162 150

Materials

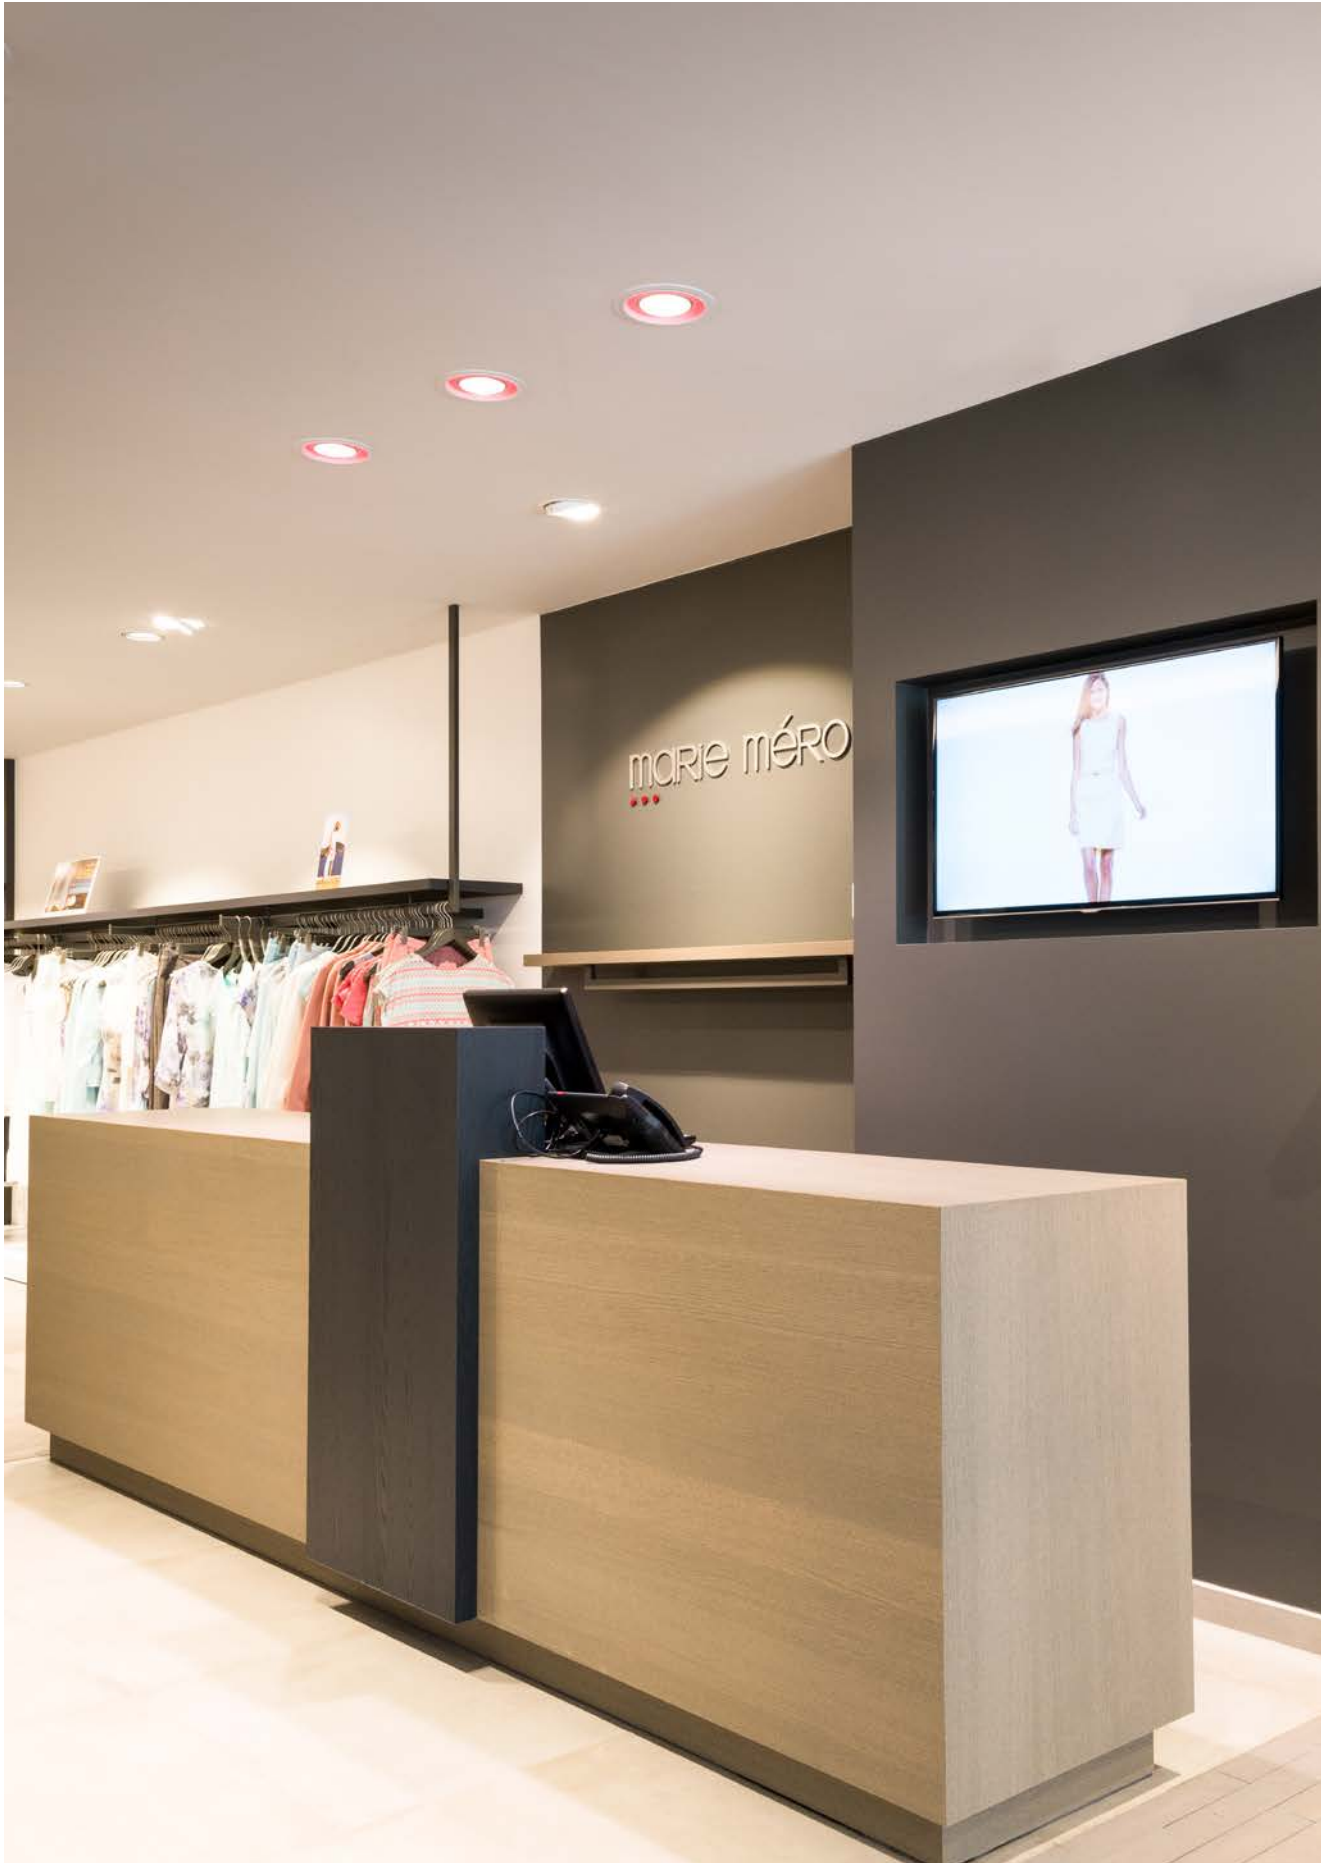
aluminium 1M | 2M

Ref cat (STD)

- 1808.XTM.1M.NW.B white tex
- 1808.XTM.1M.NW.NW white tex
- 1808.XTM.2M.NW.B black tex
- 1808.XTM.2M.NW.NW black tex

built-in
only dimmable on 2 circuits
nur dimmbar bei 2 Stromkreise





1764.IP20.S1/.. - KOZA X Ø80.IP20

=700mA



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x Led 1300lm CRI80 max. 9,5W A - A+ 700mA

Dimensions

Ø87xH110 40° reflector

Ø80 130

Reflector - Ø70

Ref cat (STD)

1764.IP20.S1.1M	NW WW
1764.IP20.S1.2M	NW WW
1764.IP20.S1.11M	NW WW
1764.IP20.S1.14	NW WW

built-in

1764.IP20.S2/.. - KOZA X Ø80.IP20

=700mA



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

1x Led 1300lm CRI80 max. 9,5W A - A+ 700mA

Dimensions

Ø87xH110 40° reflector

Ø80 130

Reflector - Ø70

Ref cat (STD)

1764.IP20.S2.1M	NW WW
1764.IP20.S2.2M	NW WW
1764.IP20.S2.11M	NW WW
1764.IP20.S2.14	NW WW

built-in




1765.1300.IP20/.. - KOZA X Ø118 CRI 80.IP20

=700mA    S1 IP20    0,7550 0,5 m 05.20.50 





downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

 1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions

 Ø126xH125  40° reflector

 Ø118  145

Reflector - Ø111

Ref cat (STD)

1765.1300.IP20.1M	NW WW
1765.1300.IP20.2M	NW WW
1765.1300.IP20.11M	NW WW
1765.1300.IP20.14	NW WW

built-in




1765.2000.IP20/.. - KOZA X Ø118 CRI 80.IP20

=700mA    S1 IP20    0,7550 0,5 m 05.20.50 





downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

 1x Led 2000lm CRI80 max. 15,2W  -  700mA

Dimensions

 Ø126xH125  40° reflector

 Ø118  145

Reflector - Ø111

Ref cat (STD)

1765.2000.IP20.1M	NW WW
1765.2000.IP20.2M	NW WW
1765.2000.IP20.11M	NW WW
1765.2000.IP20.14	NW WW

built-in



1766.1300.IP20/.. - KOZA X Ø118 CRI 95.IP20

=700mA    S1 IP20    0,4850 0,5 m 05.20.50 



downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

 1x Led 1300lm CRI95 max. 13,3W  700mA

Dimensions

 Ø126xH155  40° reflector

 Ø118  175

Reflector - Ø111

Ref cat (STD)

1766.1300.IP20.1M	NW WW
1766.1300.IP20.2M	NW WW
1766.1300.IP20.11M	NW WW
1766.1300.IP20.14	NW WW

built-in



1766.2000.IP20/.. - KOZA X Ø118 CRI 95.IP20

=1050mA    S1 IP20    0,6400 0,5 m 05.20.50 





downlight - round - fixed - without LED driver
Einbaustrahler - rund - fest - ohne Driver LED

Lamp type

 1x Led 2000lm CRI95 max. 20W  1050mA

Dimensions

 Ø126xH155  40° reflector

 Ø118  175

Reflector - Ø111

Ref cat (STD)

1766.2000.IP20.1M	NW WW
1766.2000.IP20.2M	NW WW
1766.2000.IP20.11M	NW WW
1766.2000.IP20.14	NW WW

built-in



4060.IP20/.. - LUXOR - INCA.IP20



=700mA    S2 IP20   0,3400 1 m 05.20.50 



downlight - round - fixed - down - with led - without LED driver
Einbaustrahler - rund - fest - down - mit Led - ohne Driver LED

Ref cat (STD)	
4060.IP20.1M	NW WW
4060.IP20.2M	NW WW
4060.IP20.14	NW WW

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø130xH125  40° reflector
Ø122  135
Reflector - Ø111

Options
S1 - SET TORSION SPRINGS

built-in



4061.IP20/.. - LUXOR - INCA.IP20


=700mA    S2 IP20   0,6600 1 m 05.20.50 



downlight - round - directional - down - with led - without LED driver
Einbaustrahler - rund - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)	
4061.IP20.1M	NW WW
4061.IP20.2M	NW WW
4061.IP20.14	NW WW

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø150xH135  40° reflector
Ø135  150
Reflector - Ø111

Options
S1 - SET TORSION SPRINGS

built-in



4062.IP20/.. - LUXOR - INCA.IP20




=700mA    S2 IP20   1 m 05.20.50 



downlight - fixed - down - oval - with led - without LED driver
Einbaustrahler - fest - down - oval - mit Led - ohne Driver LED

Ref cat (STD)	
4062.IP20.1M	NW WW
4062.IP20.2M	NW WW

Lamp type
2x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
L270xB142xH135  40° reflector
Ø2x130  135  130
Reflector - Ø111

Options
S1 - SET TORSION SPRINGS

built-in



4064.IP20/.. - LUXOR - INCA.IP20



=700mA    S1 IP20   0,8700 1 m 05.20.50 



downlight - round - directional - down - with led - without LED driver
Einbaustrahler - rund - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)	
4064.IP20.1M	NW WW
4064.IP20.2M	NW WW

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø180xH130  40° reflector
Ø162  135
Reflector - Ø111

Options
1808/B - OLIVIA-INCA plasterkit



built-in



1767.1300.IP20/.. - KOZA X Ø164 CRI 80.IP20

=700mA    IP20     



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA

Dimensions
Ø172xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1767.1300.IP20.1M	NW WW
1767.1300.IP20.2M	NW WW
1767.1300.IP20.11M	NW WW
1767.1300.IP20.14	NW WW



built-in



4065.IP20/.. - LUXOR - INCA.IP20

=700mA    IP20     



downlight round - fixed - down - with led - without LED driver
Einbaustrahler rund - fest - down - mit Led - ohne Driver LED

Lamp type
1x Led 2000lm CRI80 max. 15,2W  -  700mA

Dimensions
Ø178xH155  85° reflector
Ø164  135
Reflector - Ø140

Ref cat (STD)

4065.IP20.1M	NW WW
4065.IP20.2M	NW WW



built-in



1767.1300.IP20.PL/.. - KOZA X Ø164 CRI 80.IP20

=700mA    IP20      



downlight - round - fixed - down - with opal plexi - without LED driver
Einbaustrahler - rund - fest - down - mit opalenem Plexi - ohne Driver LED

Lamp type
1x Led 1300lm CRI80 max. 9,5W  -  700mA










Dimensions
Ø178xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1767.1300.IP20.PL.1M	NW WW
1767.1300.IP20.PL.2M	NW WW
1767.1300.IP20.PL.11M	NW WW
1767.1300.IP20.PL.14	NW WW



built-in



1767.2000.IP20/.. - KOZA X Ø164 CRI 80.IP20

=700mA    IP20      



downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type
1x Led 2000lm CRI80 max. 15,2W  -  700mA

Dimensions
Ø172xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1767.2000.IP20.1M	NW WW
1767.2000.IP20.2M	NW WW
1767.2000.IP20.11M	NW WW
1767.2000.IP20.14	NW WW

built-in



1767.2000.IP20.PL/.. - KOZA X Ø164 CRI 80.IP20

=700mA       





downlight - round - fixed - down - with opal plexi - without LED driver
Einbaustrahler - rund - fest - down - mit opalenem Plexi - ohne Driver LED

Lamp type

1x Led 2000lm CRI80 max. 15,2W  -  700mA

Dimensions

Ø178xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1767.2000.IP20.PL.1M	NW WW
1767.2000.IP20.PL.2M	NW WW
1767.2000.IP20.PL.11M	NW WW
1767.2000.IP20.PL.14	NW WW

built-in


1768.1300.IP20/.. - KOZA X Ø164 CRI 95.IP20

=700mA       





downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type

1x Led 1300lm CRI95 max. 13,3W  700mA

Dimensions

Ø172xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1768.1300.IP20.1M	NW WW
1768.1300.IP20.2M	NW WW
1768.1300.IP20.11M	NW WW
1768.1300.IP20.14	NW WW

built-in


1768.1300.IP20.PL/.. - KOZA X Ø164 CRI 95.IP20

=700mA        





downlight - round - fixed - down - with opal plexi - without LED driver
Einbaustrahler - rund - fest - down - mit opalenem Plexi - ohne Driver LED

Lamp type

1x Led 1300lm CRI95 max. 13,3W  700mA

Dimensions

Ø178xH153  52° reflector
Ø164  173
Reflector - Ø155

Ref cat (STD)

1768.1300.IP20.PL.1M	NW WW
1768.1300.IP20.PL.2M	NW WW
1768.1300.IP20.PL.11M	NW WW
1768.1300.IP20.PL.14	NW WW

built-in



1768.2000.IP20/.. - KOZA X Ø164 CRI 95.IP20

=1050mA    S1 IP20    1,0050  0,5 m  05.20.50 





downlight - round - fixed - down - without LED driver
Einbaustrahler - rund - fest - down - ohne Driver LED

Lamp type

 1x Led 2000lm CRI95 max. 20W  1050mA

Dimensions

 Ø172xH183  52° reflector

 Ø164  203

Reflector - Ø155

Ref cat (STD)

1768.2000.IP20.1M	NW WW
1768.2000.IP20.2M	NW WW
1768.2000.IP20.11M	NW WW
1768.2000.IP20.14	NW WW

built-in



1768.2000.IP20.PL/.. - KOZA X Ø164 CRI 95.IP20

=1050mA    S1 IP20     0,8950  0,5 m  05.20.50 





downlight - round - fixed - down - with opal plexi - without LED driver
Einbaustrahler - rund - fest - down - mit opalenem Plexi - ohne Driver LED

Lamp type

 1x Led 2000lm CRI95 max. 20W  1050mA

Dimensions

 Ø178xH183  52° reflector

 Ø164  203

Reflector - Ø155

Ref cat (STD)

1768.2000.IP20.PL.1M	NW WW
1768.2000.IP20.PL.2M	NW WW
1768.2000.IP20.PL.11M	NW WW
1768.2000.IP20.PL.14	NW WW

built-in



1971.IP20/.. - LUXOR IN

=700mA S4 IP20



downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Lamp type

1x Led 1300lm CRI80 max. 9,5W 700mA

Dimensions

L132xB132xH122 \wedge 40° reflector
124x124 \swarrow 130
Reflector - Ø70

Ref cat (STD)

1971.IP20.1M	NW WW
1971.IP20.1M.2M	NW WW
1971.IP20.2M	NW WW
1971.IP20.2M.14	NW WW

built-in

1972.IP20/.. - LUXOR IN

=700mA S4 IP20



downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Lamp type

2x Led 1300lm CRI80 max. 9,5W 700mA

Dimensions

L237xB132xH122 \wedge 40° reflector
229x124 \swarrow 130
Reflector - Ø70

Ref cat (STD)

1972.IP20.1M	NW WW
1972.IP20.1M.2M	NW WW
1972.IP20.2M	NW WW
1972.IP20.2M.14	NW WW

built-in

1973.IP20/.. - LUXOR IN

=700mA S4 IP20



downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Lamp type

3x Led 1300lm CRI80 max. 9,5W 700mA

Dimensions

L347xB132xH122 \wedge 40° reflector
339x124 \swarrow 130
Reflector - Ø70

Ref cat (STD)

1973.IP20.1M	NW WW
1973.IP20.1M.2M	NW WW
1973.IP20.2M	NW WW
1973.IP20.2M.14	NW WW

built-in

1974.IP20/.. - LUXOR IN

=700mA S4 IP20



downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Lamp type

4x Led 1300lm CRI80 max. 9,5W 700mA

Dimensions

L254xB254xH122 \wedge 40° reflector
246x246 \swarrow 130
Reflector - Ø70

Ref cat (STD)

1974.IP20.1M	NW WW
1974.IP20.1M.2M	NW WW
1974.IP20.2M	NW WW
1974.IP20.2M.14	NW WW

built-in

4071.IP20/.. - LUXOR - SPINNER

=700mA 




downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)

4071.IP20.1M	NW WW
4071.IP20.1M.2M	NW WW
4071.IP20.2M	NW WW

Lamp type

1x Led 1300lm CRI80 max. 9,5W  700mA

Dimensions

L160xB160xH160 \setminus 40° reflector
152x152 \setminus 170
Reflector - Ø111

Options

1851/A - SPINNER X plasterkit

built-in

4072.IP20/.. - LUXOR - SPINNER

=700mA 




downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)

4072.IP20.1M	NW WW
4072.IP20.1M.2M	NW WW
4072.IP20.2M	NW WW

Lamp type

2x Led 1300lm CRI80 max. 9,5W  700mA

Dimensions

L306xB160xH160 \setminus 40° reflector
298x152 \setminus 170
Reflector - Ø111

Options

1852/A - SPINNER X plasterkit

built-in

4073.IP20/.. - LUXOR - SPINNER

=700mA 




downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)

4073.IP20.1M	NW WW
4073.IP20.1M.2M	NW WW
4073.IP20.2M	NW WW

Lamp type

3x Led 1300lm CRI80 max. 9,5W  700mA

Dimensions

L455xB160xH160 \setminus 40° reflector
453x152 \setminus 170
Reflector - Ø111

Options

1853/A - SPINNER X plasterkit

built-in

4074.IP20/.. - LUXOR - SPINNER

=700mA 




downlight - square - directional - down - with led - without LED driver
Einbaustrahler - viereckig - schwenkbar - down - mit Led - ohne Driver LED

Ref cat (STD)

4074.IP20.1M	NW WW
4074.IP20.1M.2M	NW WW
4074.IP20.2M	NW WW

Lamp type

4x Led 1300lm CRI80 max. 9,5W  700mA

Dimensions

L315xB315xH160 \setminus 40° reflector
303x303 \setminus 170
Reflector - Ø111

Options

1859/A - SPINNER X plasterkit

built-in






3370/.. - FLUX INOX 316 Ø72

~230V    IP66      0,7200  0,5 m  05.20.50 



downlight - round - fixed - down - with clear glass - with LED driver
Einbaustrahler - rund - fest - down - mit klarem Glas - mit Driver LED

Lamp type
1x Led 720lm CRI80 max. 8,3W  700mA

Dimensions
Ø88xH120  40° reflector
Ø72  140
Reflector - Ø50

Options
S2 - SET FLAT SPRINGS

Ref cat (STD)	
3370.5	NW WW
3370.5BB	NW WW
3370.31MX	NW WW
3370.32X	NW WW
3370.33MX	NW WW
3370.37X	NW WW


built-in
XICATO LED included
XICATO LED einbegriffen



3374/.. - FLUX INOX 316 Ø72

~230V    IP66      0,7500  0,5 m  05.20.50 



downlight - square - fixed - down - with clear glass - with LED driver
Einbaustrahler - viereckig - fest - down - mit klarem Glas - mit Driver LED

Lamp type
1x Led 720lm CRI80 max. 8,3W  700mA

Dimensions
L88xB88xH120  40° reflector
Ø72  140
Reflector - Ø50

Options
S2 - SET FLAT SPRINGS

Ref cat (STD)	
3374.5	NW WW
3374.5BB	NW WW
3374.31MX	NW WW
3374.32X	NW WW
3374.33MX	NW WW
3374.37X	NW WW


built-in
XICATO LED included
XICATO LED einbegriffen



3371/.. - FLUX INOX 316 Ø82

~230V    IP66      0,7400  0,5 m  05.20.50 



downlight - round - fixed - down - with clear glass - with LED driver
Einbaustrahler - rund - fest - down - mit klarem Glas - mit Driver LED

Lamp type
1x Led 720lm CRI80 max. 8,3W  700mA

Dimensions
Ø98xH120  40° reflector
Ø82  140
Reflector - Ø50

Options
S2 - SET FLAT SPRINGS

Ref cat (STD)	
3371.5	NW WW
3371.5BB	NW WW
3371.31MX	NW WW
3371.32X	NW WW
3371.33MX	NW WW
3371.37X	NW WW


built-in
XICATO LED included
XICATO LED einbegriffen



3375/.. - FLUX INOX 316 Ø82

~230V    IP66      0,7700  0,5 m  05.20.50 



downlight - square - fixed - down - with clear glass - with LED driver
Einbaustrahler - viereckig - fest - down - mit klarem Glas - mit Driver LED

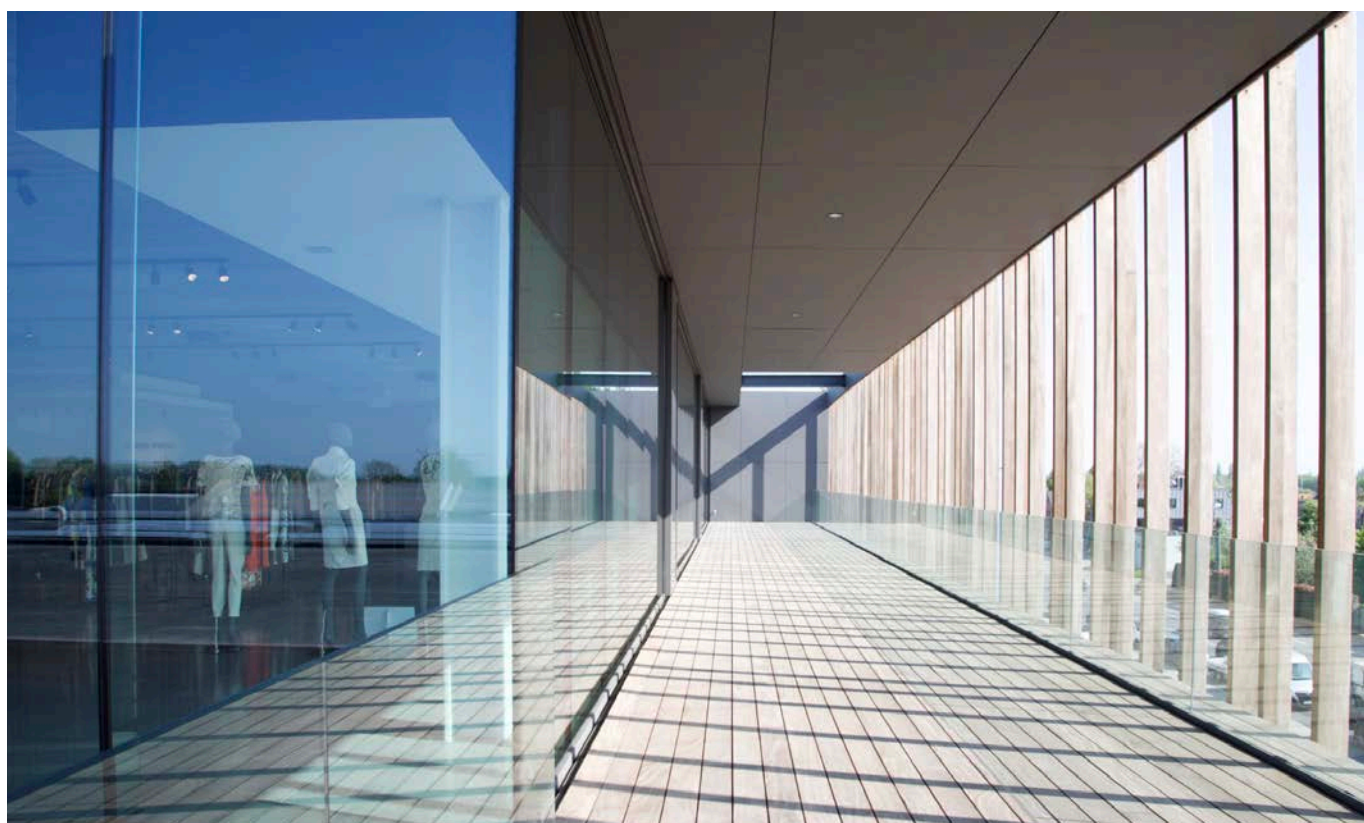
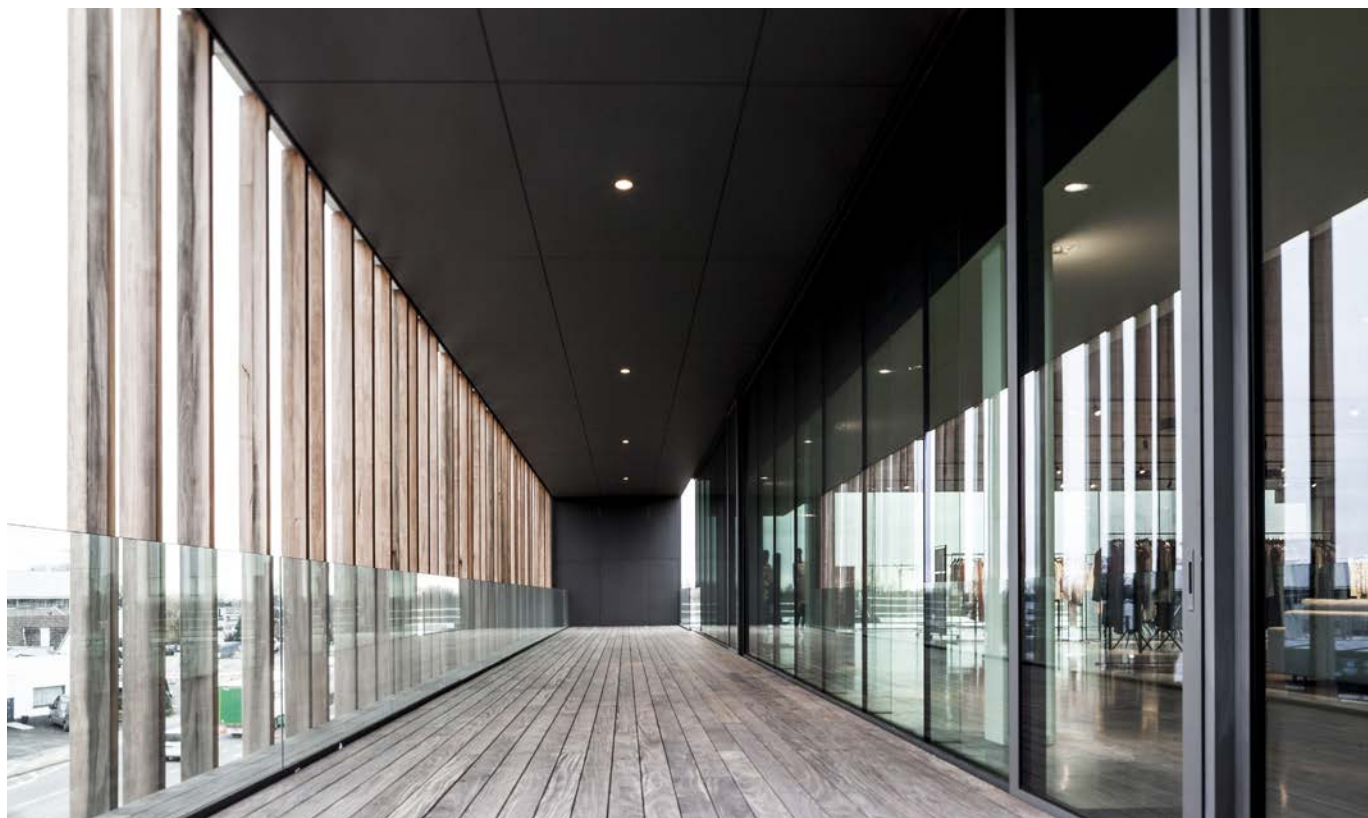
Lamp type
1x Led 720lm CRI80 max. 8,3W  700mA

Dimensions
L98xB98xH120  40° reflector
Ø82  140
Reflector - Ø50

Options
S2 - SET FLAT SPRINGS

Ref cat (STD)	
3375.5	NW WW
3375.5BB	NW WW
3375.31MX	NW WW
3375.32X	NW WW
3375.33MX	NW WW
3375.37X	NW WW

built-in
XICATO LED included
XICATO LED einbegriffen




3372/.. - FLUX INOX 316 Ø92

~230V    IP66      0,8900  0,5 m  05.20.50 




downlight - round - fixed - down - with clear glass - with LED driver
Einbaustrahler - rund - fest - down - mit klarem Glas - mit Driver LED

Lamp type

1x Led 930lm CRI80 max. 11,3W  700mA

Dimensions

Ø108xH140 

Ø92  160

Reflector - Ø70

Options

S2 - SET FLAT SPRINGS

Ref cat (STD)

3372.5	NW WW
3372.5BB	NW WW
3372.31MX	NW WW
3372.32X	NW WW
3372.33MX	NW WW
3372.37X	NW WW

built-in
XICATO LED included
XICATO LED einbegriffen


3376/.. - FLUX INOX 316 Ø92

~230V    IP66      0,9600  0,5 m  05.20.50 




downlight - square - fixed - down - with clear glass - with LED driver
Einbaustrahler - viereckig - fest - down - mit klarem Glas - mit Driver LED

Lamp type

1x Led 930lm CRI80 max. 11,3W  700mA

Dimensions

L108xB108xH140 

Ø92  160

Reflector - Ø70

Options

S2 - SET FLAT SPRINGS

Ref cat (STD)

3376.5	NW WW
3376.5BB	NW WW
3376.31MX	NW WW
3376.32X	NW WW
3376.33MX	NW WW
3376.37X	NW WW

built-in
XICATO LED included
XICATO LED einbegriffen


3373/.. - FLUX INOX 316 Ø137

~230V    IP66      1,2350  0,5 m  05.20.50 



downlight - round - fixed - down - with clear glass - with LED driver
Einbaustrahler - rund - fest - down - mit klarem Glas - mit Driver LED

Lamp type

1x Led 1420lm CRI80 max. 18,5W  700mA

Dimensions

Ø150xH155 

Ø137  175

Reflector - Ø111

Ref cat (STD)

3373.5	NW WW
3373.5BB	NW WW
3373.31MX	NW WW
3373.32X	NW WW
3373.33MX	NW WW
3373.37X	NW WW

built-in
XICATO LED included
XICATO LED einbegriffen


3377/.. - FLUX INOX 316 Ø137

~230V    IP66      1,3400  0,5 m  05.20.50 





downlight - square - fixed - down - with clear glass - with LED driver
Einbaustrahler - viereckig - fest - down - mit klarem Glas - mit Driver LED

Lamp type

1x Led 1420lm CRI80 max. 18,5W  700mA

Dimensions

L150xB150xH155 

Ø137  175

Reflector - Ø111

Ref cat (STD)

3377.5	NW WW
3377.5BB	NW WW
3377.31MX	NW WW
3377.32X	NW WW
3377.33MX	NW WW
3377.37X	NW WW

built-in
XICATO LED included
XICATO LED einbegriffen