

# **INDOOR** PROFILES

# INDOOR PROFILES

# Index

## B

BUTTERFLY LED 15

## C

CLIP DOUBLE 18

CLIP 16-17

## L

LINEA 20

## M

METRO 21-22


MIKADO 23

## S

STELLA LINE 12-13

## T

TIMES 5-10

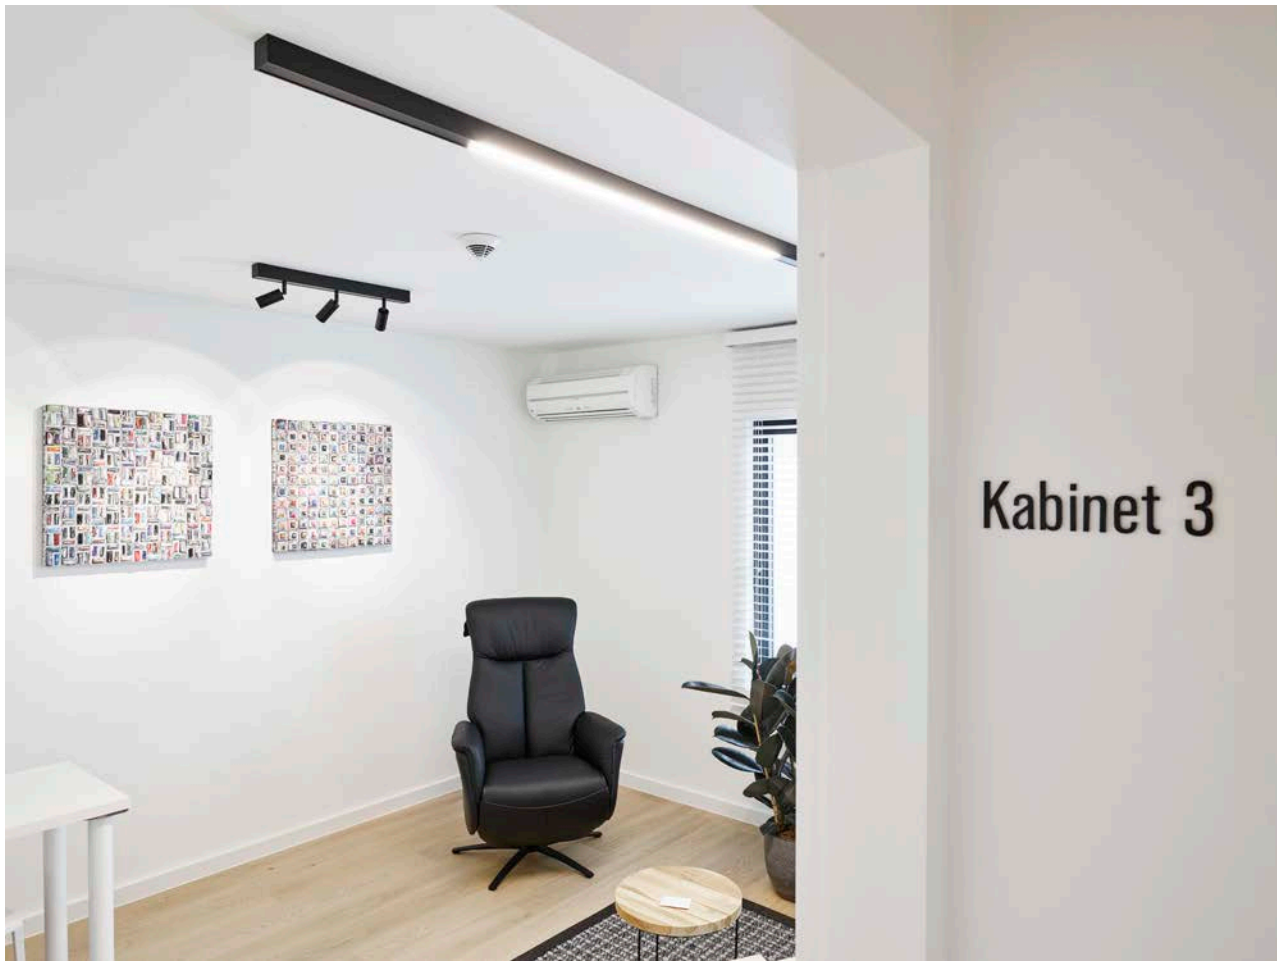


## INDOOR | Ceiling UP | Profiles | TIMES

Colour 14 (alu satin) on request for profiles up to 2m

Farbe 14 (alu satin) auf Anfrage für Profile bis 2m

### 2980/.. - TIMES T5-60X85

~230V



lighting system - mounting directly on the ceiling - with electronic gear  
Lichtsystem - Befestigung direkt an der Decke - mit elektronischem Vorschaltgerät

Reference	Colours	Length	LED	Type of lamp
2980.600	1M   2M	600		1x T16FQ T5 G5 max. 24W / 230V
2980.900	1M   2M	900		1x T16FH T5 G5 max. 21W / 230V
2980.1200	1M   2M	1200		1x T16FH T5 G5 max. 54W / 230V
2980.1500	1M   2M	1500		1x T16FQ T5 G5 max. 49W / 230V

built-up

### 2981/.. - TIMES LED 60X85

~230V




lighting system - mounting directly on the ceiling  
Lichtsystem - Befestigung direkt an der Decke

Reference	Colours	Length	LED	Type of lamp
2981.850	1M   2M	850	NW   WW	3x led 750lm max. 9W / 230V
2981.1130	1M   2M	1130	NW   WW	4x led 750lm max. 9W / 230V
2981.1410	1M   2M	1410	NW   WW	5x led 750lm max. 9W / 230V
2981.1690	1M   2M	1690	NW   WW	6x led 750lm max. 9W / 230V
2981.1970	1M   2M	1970	NW   WW	7x led 750lm max. 9W / 230V
2981.2250	1M   2M	2250	NW   WW	8x led 750lm max. 9W / 230V

built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt

### 2985/.. - TIMES T5-60x85

~230V

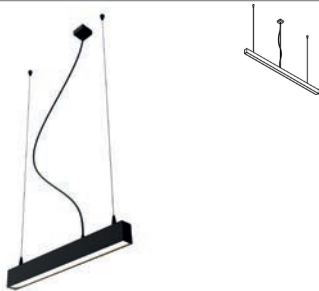

lighting system - with suspension - with electronic gear  
Lichtsystem - mit Aufhängung - mit elektronischem Vorschaltgerät

Reference	Colours	Length	LED	Type of lamp
2985.600	1M   2M	600		1x T16FQ T5 G5 max. 24W / 230V
2985.900	1M   2M	900		1x T16FH T5 G5 max. 21W / 230V
2985.1200	1M   2M	1200		1x T16FH T5 G5 max. 54W / 230V
2985.1500	1M   2M	1500		1x T16FQ T5 G5 max. 49W / 230V

built-up

### 2987/.. - TIMES LED 60X85

~230V



lighting system - with suspension  
Lichtsystem - mit Aufhängung

Reference	Colours	Length	LED	Type of lamp
2987.850	1M   2M	850	NW   WW	3x led 750lm max. 9W / 230V
2987.1130	1M   2M	1130	NW   WW	4x led 750lm max. 9W / 230V
2987.1410	1M   2M	1410	NW   WW	5x led 750lm max. 9W / 230V
2987.1690	1M   2M	1690	NW   WW	6x led 750lm max. 9W / 230V
2987.1970	1M   2M	1970	NW   WW	7x led 750lm max. 9W / 230V
2987.2250	1M   2M	2250	NW   WW	8x led 750lm max. 9W / 230V

built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt

Colour 14 (alu satin) on request for profiles up to 2m

Farbe 14 (alu satin) auf Anfrage für Profile bis 2m


**2900/.. - TIMES LED 45X45**

~230V   IP20    1,5m  0,5  05.20.50 



lighting system - with suspension - with LED driver  
Lichtsystem - mit Aufhängung - mit Driver LED

**Dimensions**

 L600xB45xH45

Reference	Colours	Length	LED	Type of lamp
2900.850	1M   2M	850	CW   NW   WW	3x Led 1250lm CRI80 max. 7,4W / 325mA
2900.1130	1M   2M	1130	CW   NW   WW	4x Led 1250lm CRI80 max. 7,4W / 325mA
2900.1410	1M   2M	1410	CW   NW   WW	5x Led 1250lm CRI80 max. 7,4W / 325mA
2900.1690	1M   2M	1690	CW   NW   WW	6x Led 1250lm CRI80 max. 7,4W / 325mA
2900.1970	1M   2M	1970	CW   NW   WW	7x Led 1250lm CRI80 max. 7,4W / 325mA
2900.2250	1M   2M	2250	CW   NW   WW	8x Led 1250lm CRI80 max. 7,4W / 325mA

**built-up**

dimnable on request DALI/PUSH - 1-10V  
dimmbar auf Anfrage DALI/PUSH - 1-10V

**2925/.. - TIMES LED 45X45 EX T**

~230V   IP20    0,5  05.20.50 



lighting system - mounting directly against ceiling - driver  
outside profile - delivered separately - with LED driver  
Lichtsystem - Befestigung direkt an der Decke - Treiber  
separat mitgeliefert - mit Driver LED

Reference	Colours	Length	LED	Type of lamp
2925.850	1M   2M	850	CW   NW   WW	3x Led 1250lm CRI80 max. 7,4W / 325mA
2925.1130	1M   2M	1130	CW   NW   WW	4x Led 1250lm CRI80 max. 7,4W / 325mA
2925.1410	1M   2M	1410	CW   NW   WW	5x Led 1250lm CRI80 max. 7,4W / 325mA
2925.1690	1M   2M	1690	CW   NW   WW	6x Led 1250lm CRI80 max. 7,4W / 325mA
2925.1970	1M   2M	1970	CW   NW   WW	7x Led 1250lm CRI80 max. 7,4W / 325mA
2925.2250	1M   2M	2250	CW   NW   WW	8x Led 1250lm CRI80 max. 7,4W / 325mA
2925.2530	1M   2M	2500	CW   NW   WW	9x Led 1250lm CRI80 max. 7,4W / 325mA

**built-up**

drivers at distance - dimmable on request DALI/PUSH - 1-10V  
Treiber auf Abstand - dimmbar auf Anfrage DALI/PUSH - 1-10V  
3-7 modules : 2 wires - 8-9 modules : 4 wires  
3-7 Module: 2 Kabel - 8-9 Module: 4 Kabel




# INDOOR | Ceiling UP | Profiles | TIMES

Colour 14 (alu satin) on request for profiles up to 2m

Farbe 14 (alu satin) auf Anfrage für Profile bis 2m

## 2920/.. - TIMES LED 45X70

~230V



lighting system - with suspension - with LED driver  
Lichtsystem - mit Aufhängung - mit Driver LED

Reference	Colours	Length	LED	Type of lamp
2920.850	1M   2M	850	CW   NW   WW	3x Led 1250lm CRI80 max. 7,4W / 325mA
2920.1130	1M   2M	1130	CW   NW   WW	4x Led 1250lm CRI80 max. 7,4W / 325mA
2920.1410	1M   2M	1410	CW   NW   WW	5x Led 1250lm CRI80 max. 7,4W / 325mA
2920.1690	1M   2M	1690	CW   NW   WW	6x Led 1250lm CRI80 max. 7,4W / 325mA
2920.1970	1M   2M	1970	CW   NW   WW	7x Led 1250lm CRI80 max. 7,4W / 325mA
2920.2250	1M   2M	2250	CW   NW   WW	8x Led 1250lm CRI80 max. 7,4W / 325mA
2920.2530	1M   2M	2530	CW   NW   WW	9x Led 1250lm CRI80 max. 7,4W / 325mA
2920.2810	1M   2M	2810	CW   NW   WW	10x Led 1250lm CRI80 max. 7,4W / 325mA
2920.3090	1M   2M	3090	CW   NW   WW	11x Led 1250lm CRI80 max. 7,4W / 325mA

**built-up**

dimmmable on request DALI/PUSH - 1-10V  
dimmmbar auf Anfrage DALI/PUSH - 1-10V

## 2930/.. - TIMES LED 45X70

~230V



lighting system - mounting directly on the ceiling - with LED driver  
Lichtsystem - Befestigung direkt an der Decke - mit Driver LED

Reference	Colours	Length	LED	Type of lamp
2930.850	1M   2M	850	CW   NW   WW	3x Led 1250lm CRI80 max. 7,4W / 325mA
2930.1130	1M   2M	1130	CW   NW   WW	4x Led 1250lm CRI80 max. 7,4W / 325mA
2930.1410	1M   2M	1410	CW   NW   WW	5x Led 1250lm CRI80 max. 7,4W / 325mA
2930.1690	1M   2M	1690	CW   NW   WW	6x Led 1250lm CRI80 max. 7,4W / 325mA
2930.1970	1M   2M	1970	CW   NW   WW	7x Led 1250lm CRI80 max. 7,4W / 325mA
2930.2250	1M   2M	2250	CW   NW   WW	8x Led 1250lm CRI80 max. 7,4W / 325mA
2930.2530	1M   2M	2530	CW   NW   WW	9x Led 1250lm CRI80 max. 7,4W / 325mA
2930.2810	1M   2M	2810	CW   NW   WW	10x Led 1250lm CRI80 max. 7,4W / 325mA
2930.3090	1M   2M	3090	CW   NW   WW	11x Led 1250lm CRI80 max. 7,4W / 325mA


**built-up**

dimmmable on request DALI/PUSH - 1-10V  
dimmmbar auf Anfrage DALI/PUSH - 1-10V







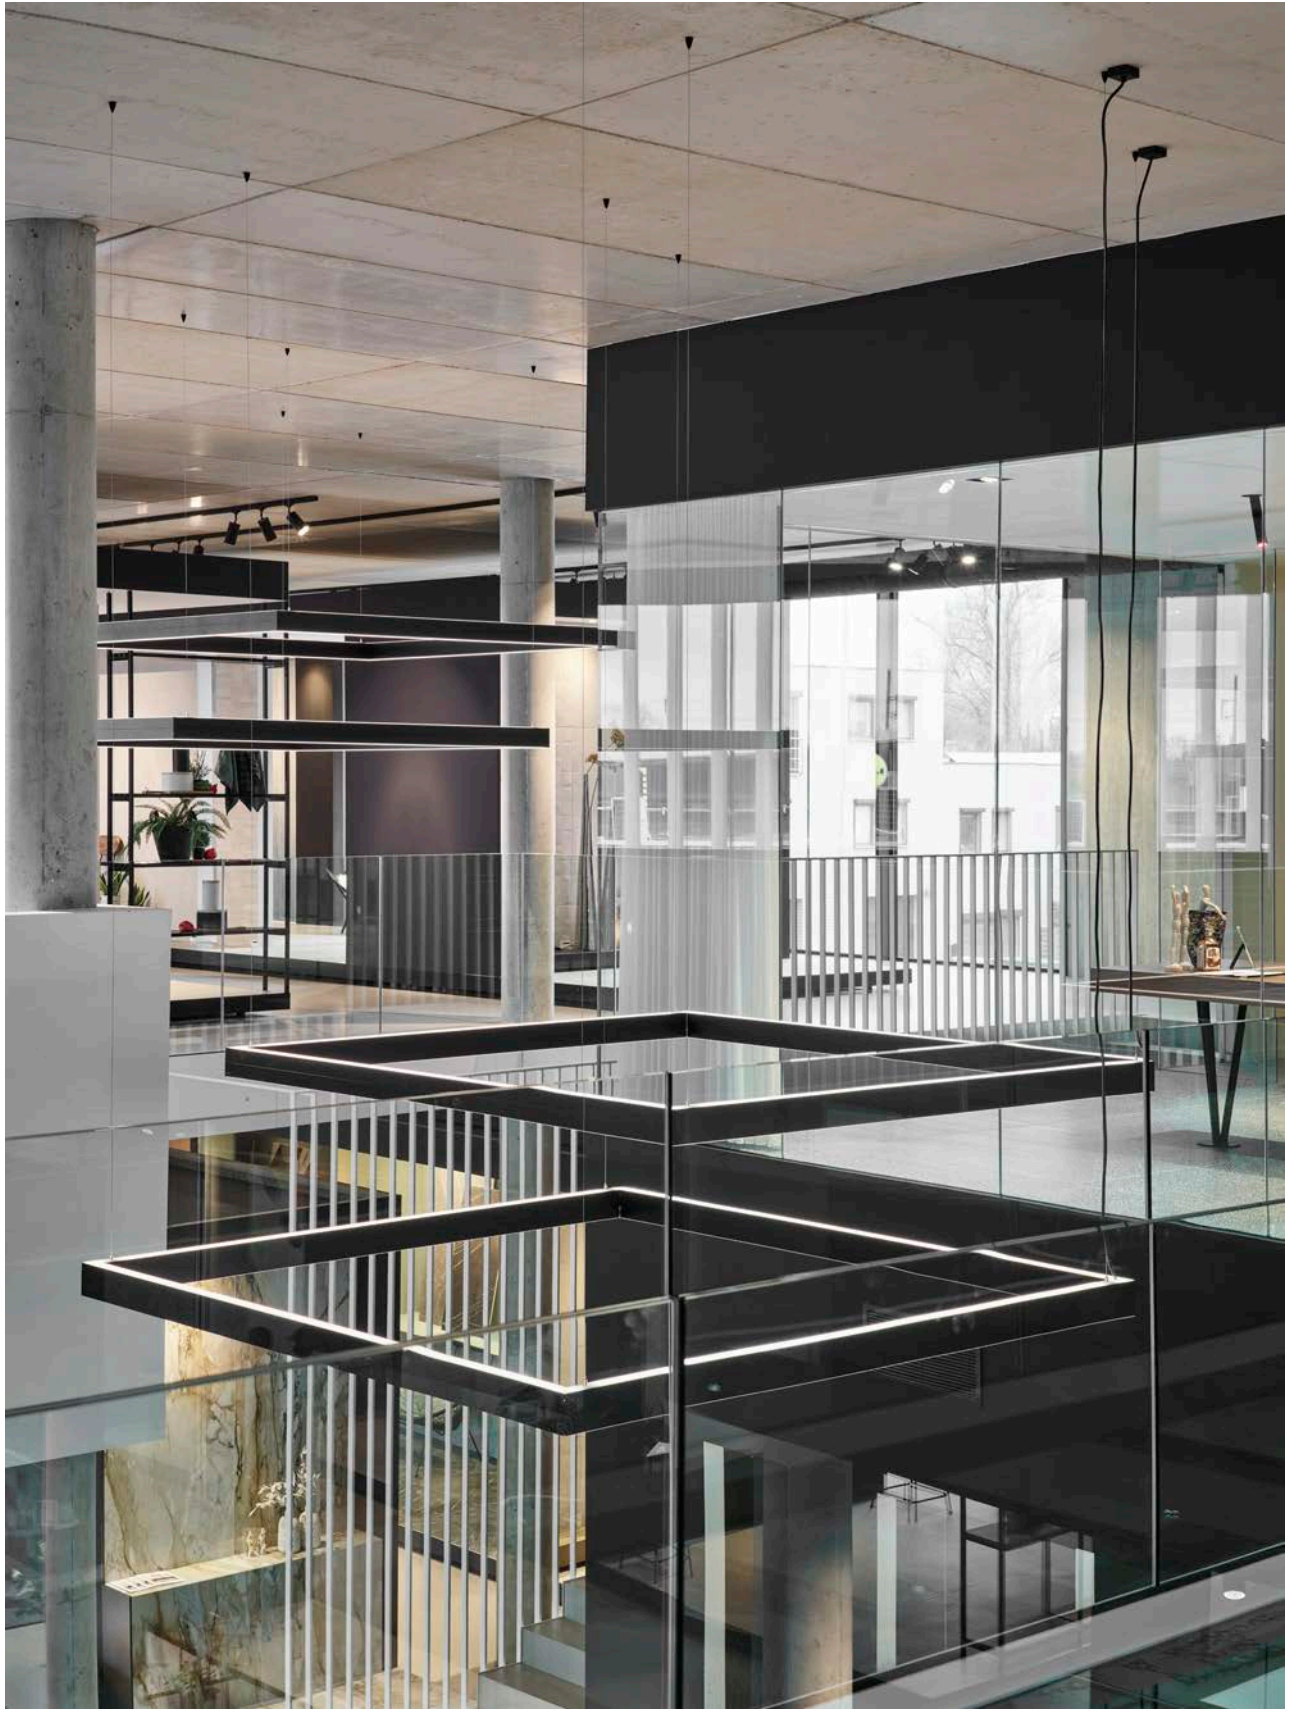

Colour 14 (alu satin) on request for profiles up to 2m

Farbe 14 (alu satin) auf Anfrage für Profile bis 2m




**2986/.. - TIMES CROSS**

~230V   IP20    1,5 m  0,5  



lighting system - with suspension - made to measure - with LED driver  
 Lichtsystem - mit Aufhängung - Maßgeschneidert - mit Driver LED

Ref	
2986.1M	CW   NW
2986.2M	CW   NW

**Lamptype**  
 6x Led 1250lm CRI80 max. 7,8W  -  250mA

**built-up**  
 specify dimensions for quotation  
 Geben Sie die richtigen Abmessungen für das Angebot an




**2988/.. - TIMES KADER**

~230V   IP20    1,5 m  7,200  0,5  




lighting system - with suspension - made to measure - with LED driver  
 Lichtsystem - mit Aufhängung - Maßgeschneidert - mit Driver LED

Ref	
2988.1M	CW   NW   WW
2988.2M	CW   NW   WW


**Lamptype**  
 12x Led 1250lm CRI80 max. 7,4W  -  325mA


**built-up**  
 specify dimensions for quotation  
 Geben Sie die richtigen Abmessungen für das Angebot an

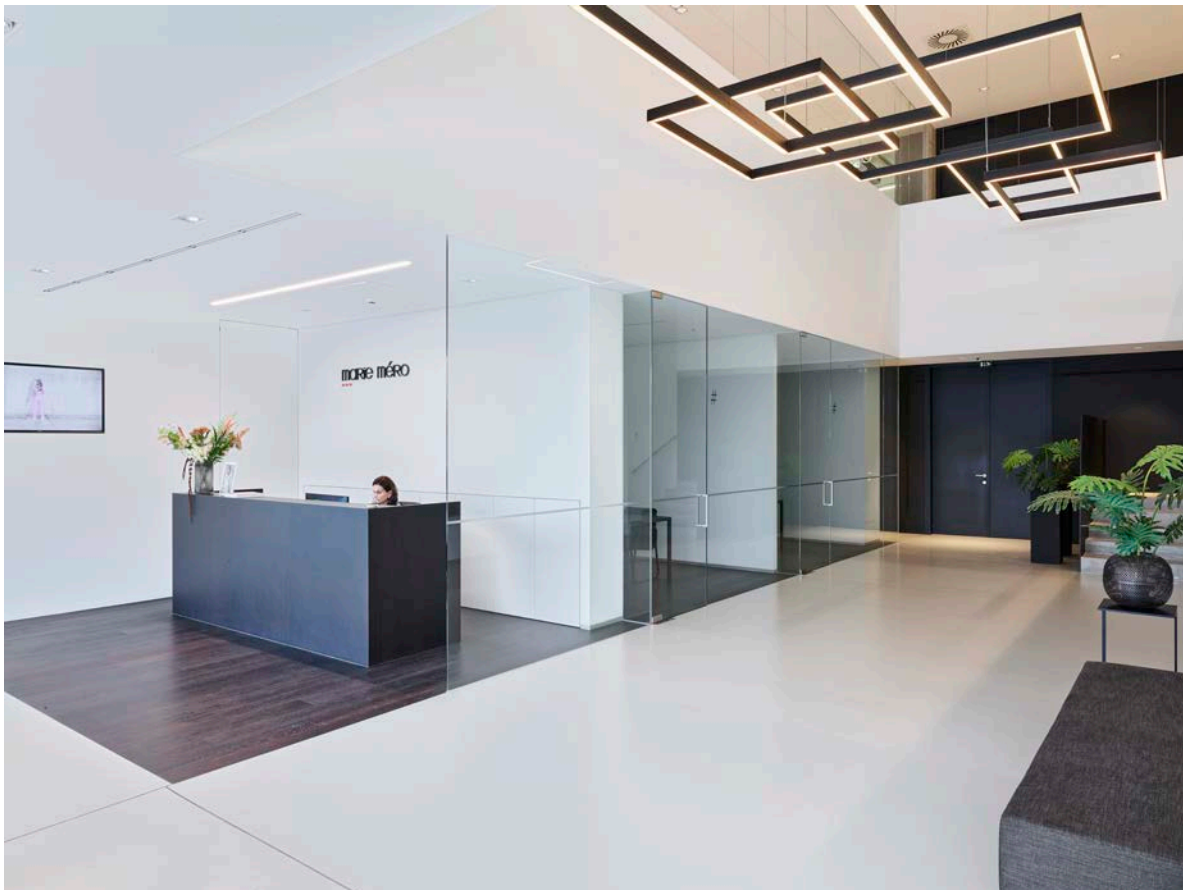






2918.1400/.. - STELLA LINE

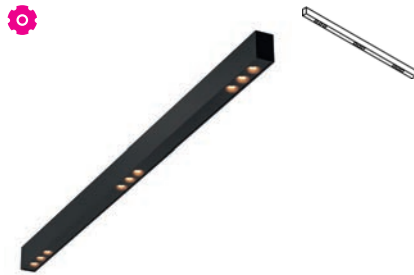~230V   IP20     



fixed - down - profile with 3x3 ZIA LED - with LED driver  
fest - down - Profil mit 3x3 ZIA LED - mit Driver LED








**Lamp type**  
 9x led 467lm CRI80 max. 3,8W  -  350mA


**Dimensions**  
 L1400xB45xH70  38

Ref	
2918.1400.1M	NW   WW
2918.1400.2M	NW   WW
2918.1400.47	NW   WW

**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich



2919.1400/.. - STELLA LINE

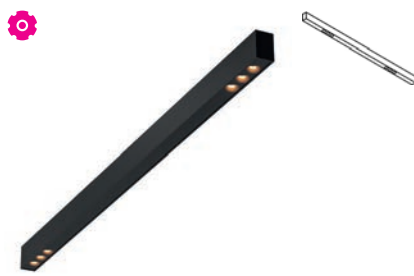~230V   IP20     



fixed - down - profile with 2x3 ZIA LED - with LED driver  
fest - down - Profil mit 2x3 ZIA LED - mit Driver LED


**Lamp type**  
 6x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 L1400xB45xH70  38

Ref	
2919.1400.1M	NW   WW
2919.1400.2M	NW   WW
2919.1400.47	NW   WW




**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich



2945.1400/.. - STELLA LINE

~230V   IP20     



fixed - down - profile with 2x4 ZIA LED fixed - with LED driver  
fest - down - Profil mit 2x4 ZIA LED fest - mit Driver LED








**Lamp type**  
 8x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 L1400xB45xH70  38

Ref	
2945.1400.1M	NW   WW
2945.1400.2M	NW   WW
2945.1400.47	NW   WW




**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich



2921.1000/.. - STELLA LINE

~230V   IP20     



down - profile with 2x2 STELLA orientable + 1x2 ZIA LED fixed - with LED driver  
down - Profil mit 2x2 STELLA orientierbar + 1x2 ZIA LED fest - mit Driver LED

**Lamp type**  
 6x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 L1000xB45xH70  38

Ref	
2921.1000.1M	NW   WW
2921.1000.2M	NW   WW
2921.1000.47	NW   WW

**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich






2922.1000/.. - STELLA LINE

~230V   IP20   0,5 m  05.20.50 



down - profile with 2x2 STELLA orientable + 1x3 ZIA LED fixed  
 - with LED driver  
 down - Profil mit 2x2 STELLA schwenkbar + 1x3 ZIA LED fest  
 - mit Driver LED

Ref	
2922.1000.1M	NW   WW
2922.1000.2M	NW   WW
2922.1000.47	NW   WW

**Lamptype**  
 7x led 467lm CRI80 max. 3,8W  -  350mA  
**Dimensions**  
 L1000xB45xH70  38

**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich






2923.1400/.. - STELLA LINE

~230V   IP20   4,1800  0,5 m  05.20.50 



down - profile with 2x3 STELLA orientable + 1x3 ZIA LED fixed  
 - with LED driver  
 down - Profil mit 2x3 STELLA schwenkbar + 1x3 ZIA LED fest  
 - mit Driver LED

Ref	
2923.1400.1M	NW   WW
2923.1400.2M	NW   WW
2923.1400.47	NW   WW

**Lamptype**  
 9x led 467lm CRI80 max. 3,8W  -  350mA  
**Dimensions**  
 L1400xB45xH70  38

**built-up**  
 500mA - 5,8W - 570 lm on request | other dimensions on request  
 500mA - 5,8W - 570 lm auf Anfrage | andere Abmessungen auf Anfrage  
 other dimming methods possible on request  
 andere Dimmtechniken auf Anfrage möglich





**28..LED/.. - BUTTERFLY LED**

~230V   IP20    1,5 m  0,5 m  05.20.50 



lighting system - with led  
Lichtsystem - mit Led

Reference	Colours	Length	LED	Type of lamp
2800LED	1M   40	1100	NW	4x led 750lm max. 9W / 230V
2801LED	1M   40	1400	NW	6x led 750lm max. 9W / 230V
2802LED	1M   40	1700	NW	8x led 750lm max. 9W / 230V
2803LED	1M   40	2000	NW	10x led 750lm max. 9W / 230V

*built-up*  
*dimnable phase-cut*  
*dimmbar Phasenabschnitt*

**280.LED/.. - BUTTERFLY LED**


~230V   IP20    1,5 m  0,5 m  05.20.50 



lighting system - with led  
Lichtsystem - mit Led


Reference	Colours	Length	LED	Type of lamp
2804LED	1M   40	1100	NW	4x led 750lm max. 9W / 230V
2805LED	1M   40	1400	NW	6x led 750lm max. 9W / 230V
2806LED	1M   40	1700	NW	8x led 750lm max. 9W / 230V
2807LED	1M   40	2000	NW	10x led 750lm max. 9W / 230V

*built-up*  
*dimnable phase-cut*  
*dimmbar Phasenabschnitt*

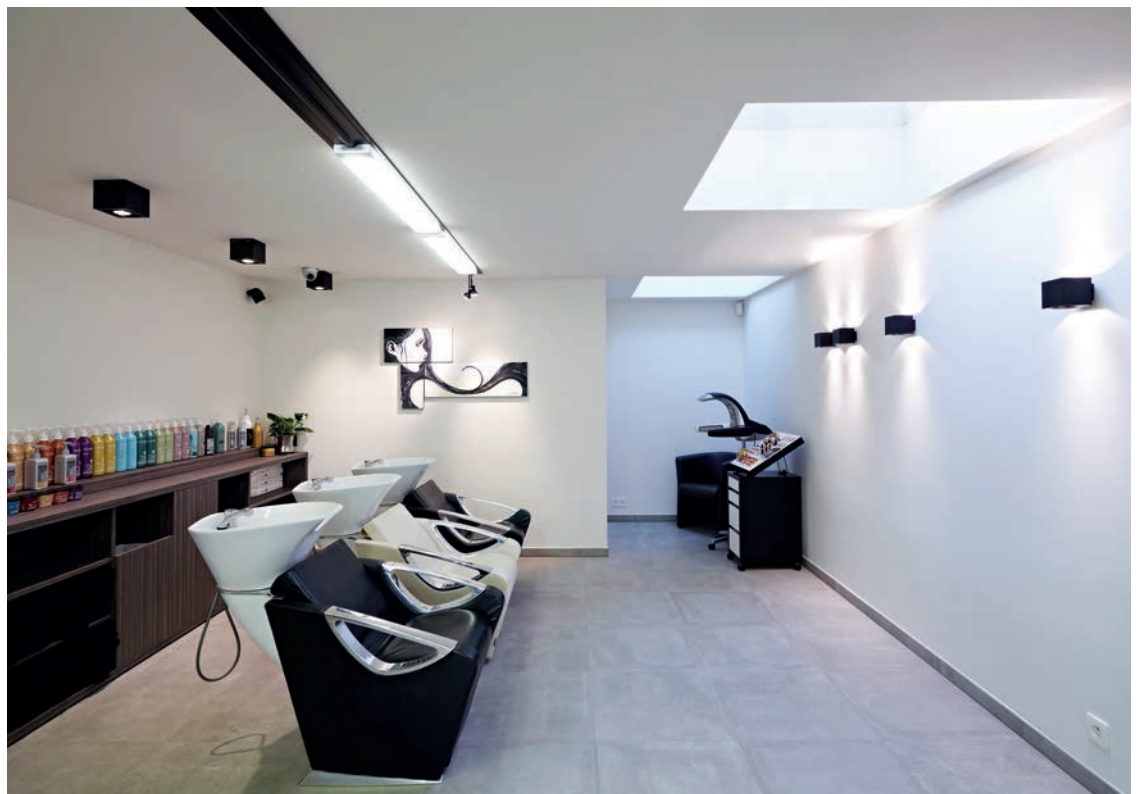

**2548BLED/.. - CLIP LED**

~230V  IP20    1,5 m   

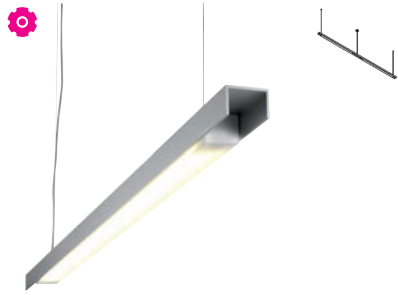

lighting system - PC 2 x 1200mm  
Lichtsystem - PC 2 x 1200mm

**Lamptype**  
8x led 750lm max. 9W  230V

**Dimensions**  
L3000xB60xH50


**Materials**  
aluminium 1M | 40

**Ref cat (LONG)**  
2548BLED.1M.NW white tex  
2548BLED.40.NW anodised alu

*built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt*

**2558CLED/.. - CLIP LED**

~230V  IP20    1,5 m   

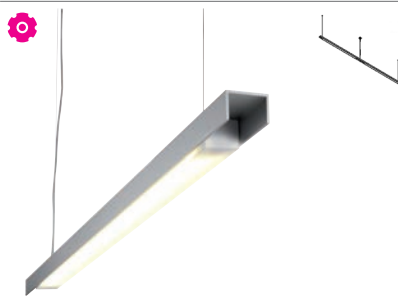

lighting system - PC 2 x 1500mm  
Lichtsystem - PC 2 x 1500mm

**Lamptype**  
10x led 750lm max. 9W  230V

**Dimensions**  
L3600xB60xH50


**Materials**  
aluminium 1M | 40

**Ref cat (LONG)**  
2558CLED.1M.NW white tex  
2558CLED.40.NW anodised alu

*built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt*

**2516BLED/.. - CLIP LED**

~230V  IP20    1,5 m   

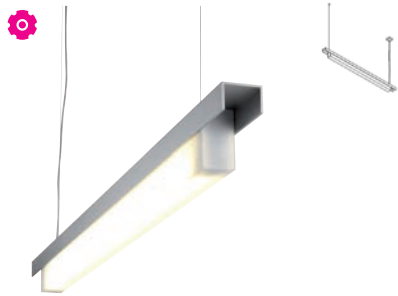

lighting system - PC 1200mm  
Lichtsystem - PC 1200mm

**Lamptype**  
4x led 750lm max. 9W  230V

**Dimensions**  
L1400xB60xH95


**Materials**  
aluminium 1M | 40

**Ref**  
2516BLED.1M.NW white tex  
2516BLED.40.NW anodised alu

*built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt*

**2520CLED/.. - CLIP LED**

~230V  IP20    1,5 m   

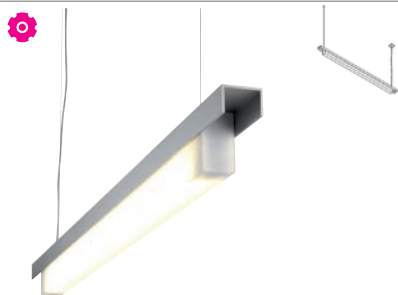

lighting system - PC 1500mm  
Lichtsystem - PC 1500mm

**Lamptype**  
5x led 1500lm max. 16W  230V

**Dimensions**  
L1700xB60xH95

**Materials**  
aluminium 1M | 40

**Ref cat (LONG)**  
2520CLED.1M.NW white tex  
2520CLED.40.NW anodised alu

*built-up  
dimmable phase-cut  
dimmbar Phasenabschnitt*



2524BLED/.. - CLIP LED

~230V  IP20    1,5 m  0,5 m  



lighting system - PC 2 x 1200mm  
Lichtsystem - PC 2 x 1200mm

Lamptype

8x led 750lm max. 9W  230V

Dimensions

L2660xB60xH95

Materials

aluminium 1M | 40

Ref cat (LONG)

2524BLED.1M.NW white tex  
2524BLED.40.NW anodised alu

*built-up*  
*dimmmable phase-cut*  
*dimmmbar Phasenabschnitt*

2528CLED/.. - CLIP LED

~230V  IP20    1,5 m  0,5 m  



lighting system - PC 2 x 1500mm  
Lichtsystem - PC 2 x 1500mm

Lamptype

10x led 750lm max. 9W  230V

Dimensions

L3260xB60xH95

Materials

aluminium 1M | 40

Ref cat (LONG)


2528CLED.1M.NW white tex  
2528CLED.40.NW anodised alu

*built-up*  
*dimmmable phase-cut*  
*dimmmbar Phasenabschnitt*



2538.ALED/.. - CLIP DOUBLE

~230V  IP20    1,5 m   

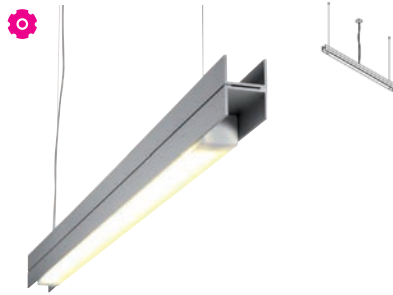

lighting system - down/up - PC 1200mm  
Lichtsystem - down/up - PC 1200mm

**Lamp type**  
8x led 750lm max. 9W  230V

**Dimensions**  
L1400xB60xH92


**Materials**  
aluminium 1M | 2M | 40

**Ref**  
2538.ALED.1M.NW white tex  
2538.ALED.2M.NW black tex  
2538.ALED.40.NW anodised alu

**built-up**  
dimmable phase-cut - UP/DOWN  
dimmbar Phasenabschnitt

2546.CLED/.. - CLIP DOUBLE

~230V  IP20    1,5 m   

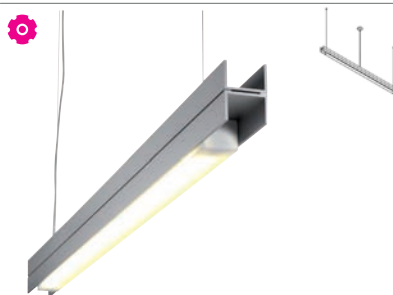

lighting system - down/up - PC 1500mm  
Lichtsystem - down/up - PC 1500mm

**Lamp type**  
10x led 750lm max. 9W  230V

**Dimensions**  
L1700xB60xH92


**Materials**  
aluminium 1M | 2M | 40

**Ref cat (LONG)**  
2546.CLED.1M white tex  
2546.CLED.2M black tex  
2546.CLED.40 anodised alu

**built-up**  
dimmable phase-cut  
dimmbar Phasenabschnitt - UP/DOWN

2554.BLED/.. - CLIP DOUBLE

~230V  IP20    1,5 m   

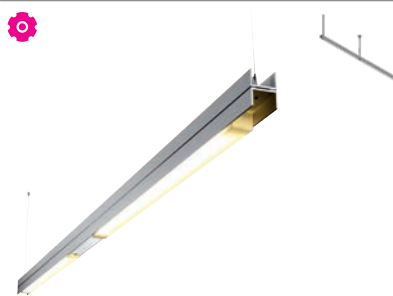

lighting system - down/up - PC 2 x 1200mm  
Lichtsystem - down/up - PC 2 x 1200mm

**Lamp type**  
16x led 750lm max. 9W  230V

**Dimensions**  
L2660xB60xH92

**Materials**  
aluminium 1M | 2M | 40


**Ref cat (LONG)**  
2554.BLED.1M.NW white tex  
2554.BLED.2M.NW black tex  
2554.BLED.40.NW anodised alu

**built-up**  
dimmable phase-cut - UP/DOWN  
dimmbar Phasenabschnitt





2595/.. - LINEA

~230V    IP20    1,5 m  9,2050  0,5 m  05.20.50 



lighting system - down/up - current supply sidelong - with transformer - with electronic gear  
 Lichtsystem - down/up - laterale Stromzuführung - mit Trafo - mit elektronischem Vorschaltgerät

Ref	
2595.1M	white tex
2595.2M	black tex
2595.40	anodised alu

**Lamp type**  
 3x T16FH T5 G5 max. 21W  230V  
 2x QPAR 51 GU10 max. 35W  230V


**Dimensions**  
 L1600xB220xH50

**Materials**  
 aluminium 1M | 2M | 40

built-up



2596/.. - LINEA

~230V    IP20    1,5 m  11,0000  0,5 m  05.20.50 



lighting system - down/up - current supply to choose - with transformer - with electronic gear  
 Lichtsystem - down/up - Stromzuführung auf Wahl - mit Trafo - mit elektronischem Vorschaltgerät

Ref	
2596.1M	white tex
2596.2M	black tex
2596.40	anodised alu

**Lamp type**  
 3x T16FH T5 G5 max. 21W  230V  
 2x QPAR 51 GU10 max. 35W  230V


**Dimensions**  
 L1600xB220xH50

**Materials**  
 aluminium 1M | 2M | 40

built-up  
 standard with ceiling beam  
 standard mit Deckenbalken



2597/.. - LINEA

~230V    IP20    1,5 m  9,2500  0,5 m  05.20.50 



lighting system - down/up - current supply sidelong - with transformer - with electronic gear  
 Lichtsystem - down/up - laterale Stromzuführung - mit Trafo - mit elektronischem Vorschaltgerät

Ref	
2597.1M	white tex
2597.2M	black tex
2597.40	anodised alu

**Lamp type**  
 4x T16FH T5 G5 max. 21W  230V  
 2x QPAR 51 GU10 max. 35W  230V


**Dimensions**  
 L1600xB220xH50

**Materials**  
 aluminium 1M | 2M | 40

built-up



2598/.. - LINEA

~230V    IP20    1,5 m  9,2500  0,5 m  05.20.50 



lighting system - down/up - current supply to choose - with transformer - with electronic gear  
 Lichtsystem - down/up - Stromzuführung auf Wahl - mit Trafo - mit elektronischem Vorschaltgerät

Ref	
2598.1M	white tex
2598.2M	black tex
2598.40	anodised alu

**Lamp type**  
 4x T16FH T5 G5 max. 21W  230V  
 2x QPAR 51 GU10 max. 35W  230V

**Dimensions**  
 L1600xB220xH50

**Materials**  
 aluminium 1M | 2M | 40

built-up  
 standard with ceiling beam  
 standard mit Deckenbalken

**2100ALED/.. - METRO LED**

~230V  IP20    0 m   



lighting system - 5 openings  
Lichtsystem - 5 Löcher

**Lamptype**  
2x led 750lm max. 9W  230V

**Dimensions**  
Ø100xL1100

**Materials**  
aluminium 1M | 2M | 40

**Ref**  
2100ALED.1M.NW white tex  
2100ALED.2M.NW black tex  
2100ALED.40.NW anodised alu

*built-up*  
*dimmable phase-cut*  
*dimmbar Phasenabschnitt*

**2101ALED/.. - METRO LED**

~230V  IP20    1,5 m   



lighting system - 7 openings  
Lichtsystem - 7 Löcher

**Lamptype**  
3x led 750lm max. 9W  230V

**Dimensions**  
Ø100xL1400

**Materials**  
aluminium 1M | 2M | 40

**Ref**  
2101ALED.1M.NW white tex  
2101ALED.2M.NW black tex  
2101ALED.40.NW anodised alu

*built-up*  
*dimmable phase-cut*  
*dimmbar Phasenabschnitt*

**2102ALED/.. - METRO LED**

~230V  IP20    1,5 m   



lighting system - 9 openings  
Lichtsystem - 9 Löcher

**Lamptype**  
4x led 750lm max. 9W  230V

**Dimensions**  
Ø100xL1700

**Materials**  
aluminium 1M | 2M | 40

**Ref cat (LONG)**  
2102ALED.1M.NW white tex  
2102ALED.2M.NW black tex  
2102ALED.40.NW anodised alu

*built-up*  
*dimmable phase-cut*  
*dimmbar Phasenabschnitt*

**2103ALED/.. - METRO LED**

~230V  IP20    1,5 m   



lighting system - 12 openings  
Lichtsystem - 12 Löcher

**Lamptype**  
5x led 750lm max. 9W  230V

**Dimensions**  
Ø100xL2100

**Materials**  
aluminium 1M | 2M | 40

**Ref cat (LONG)**  
2103ALED.1M.NW white tex  
2103ALED.2M.NW black tex  
2103ALED.40.NW anodised alu

*built-up*  
*dimmable phase-cut*  
*dimmbar Phasenabschnitt*




2106ALED/.. - METRO LED

~230V  IP20    0 m   



lighting system - 3 openings  
Lichtsystem - 3 Löcher

Lamp type

2x led 750lm max. 9W  230V  
4x QPAR 51 GU10 max. 35W  -  230V

Dimensions

Ø100xL1400

Materials

aluminium 1M | 2M | 40

Ref

2106ALED.1M.NW white tex  
2106ALED.2M.NW black tex  
2106ALED.40.NW anodised alu

**built-up**

4 step spotlights included - dimmable phase-cut  
4 Strahler Step einbegriffen - dimmbar  
Phasenabschnitt



2601/.. - MIKADO

~230V   IP20    1,5 m  2,0800  0,5 m  05.20.50 



lighting system - lamp not covered - with electronic gear  
 Lichtsystem - Leuchtmittel nicht abgedeckt - mit elektronischem Vorschaltgerät

**Lamp type**  
 1x T16FQ T5 G5 max. 24W  230V

**Dimensions**  
 Ø35xL1004


**Materials**  
 aluminium 14 | 1M | 2M

Ref	
2601.1M	white tex
2601.2M	black tex
2601.14	alu satin

**built-up**  
 without ceiling plate - with base 005 + 3 suspensions  
 ohne Deckenplatte - mit Rosette 005 + 3 Abhängungen

2602/.. - MIKADO

~230V   IP20    1,5 m  3,7000  0,5 m  05.20.50 

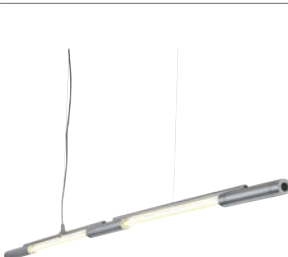

lighting system - lamp not covered - with electronic gear  
 Lichtsystem - Leuchtmittel nicht abgedeckt - mit elektronischem Vorschaltgerät

**Lamp type**  
 2x T16FQ T5 G5 max. 24W  230V

**Dimensions**  
 Ø35xL1764

**Materials**  
 aluminium 14 | 1M | 2M

Ref cat (LONG)	
2602.1M	white tex
2602.2M	black tex
2602.14	alu satin

**built-up**  
 without ceiling plate - with base 005 + 3 suspensions  
 ohne Deckenplatte - mit Rosette 005 + 3 Abhängungen

2603/.. - MIKADO

~230V   IP20    1,5 m  4,5800  0,5 m  05.20.50 



lighting system - lamp not covered - with electronic gear  
 Lichtsystem - Leuchtmittel nicht abgedeckt - mit elektronischem Vorschaltgerät

**Lamp type**  
 3x T16FQ T5 G5 max. 24W  230V

**Dimensions**  
 Ø35xL2524

**Materials**  
 aluminium 14 | 1M | 2M

Ref cat (LONG)	
2603.1M	white tex
2603.2M	black tex
2603.14	alu satin

**built-up**  
 without ceiling plate - with base 005 + 4 suspensions  
 ohne Deckenplatte - mit Rosette 005 + 4 Abhängungen

