


Lucy 48V




EASY CLICK *rail systems*

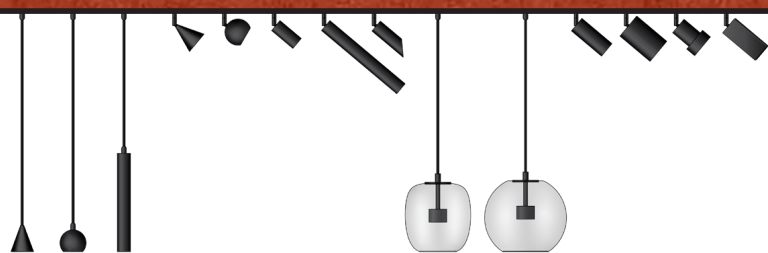

 **psmlighting**
100% Made in Belgium

A RANGE THAT MATCHES ITS FEATURES

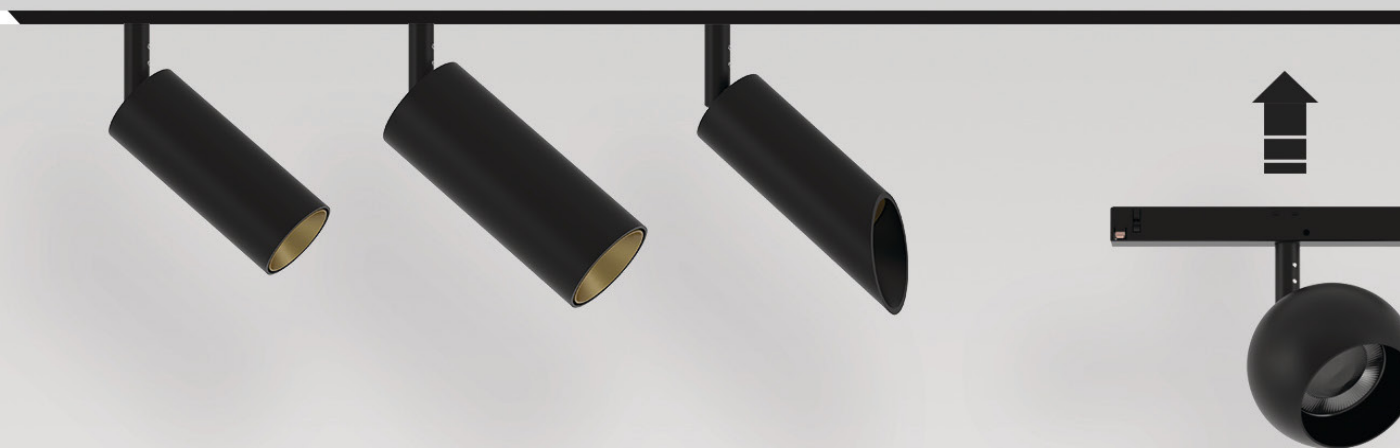


All information in this catalogue is without engagement.

Psmighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.

Read instructions carefully. The general psmighting sales conditions are always applicable.

Nothing in this catalogue can be reproduced without permission in writing from the psmighting bv company.

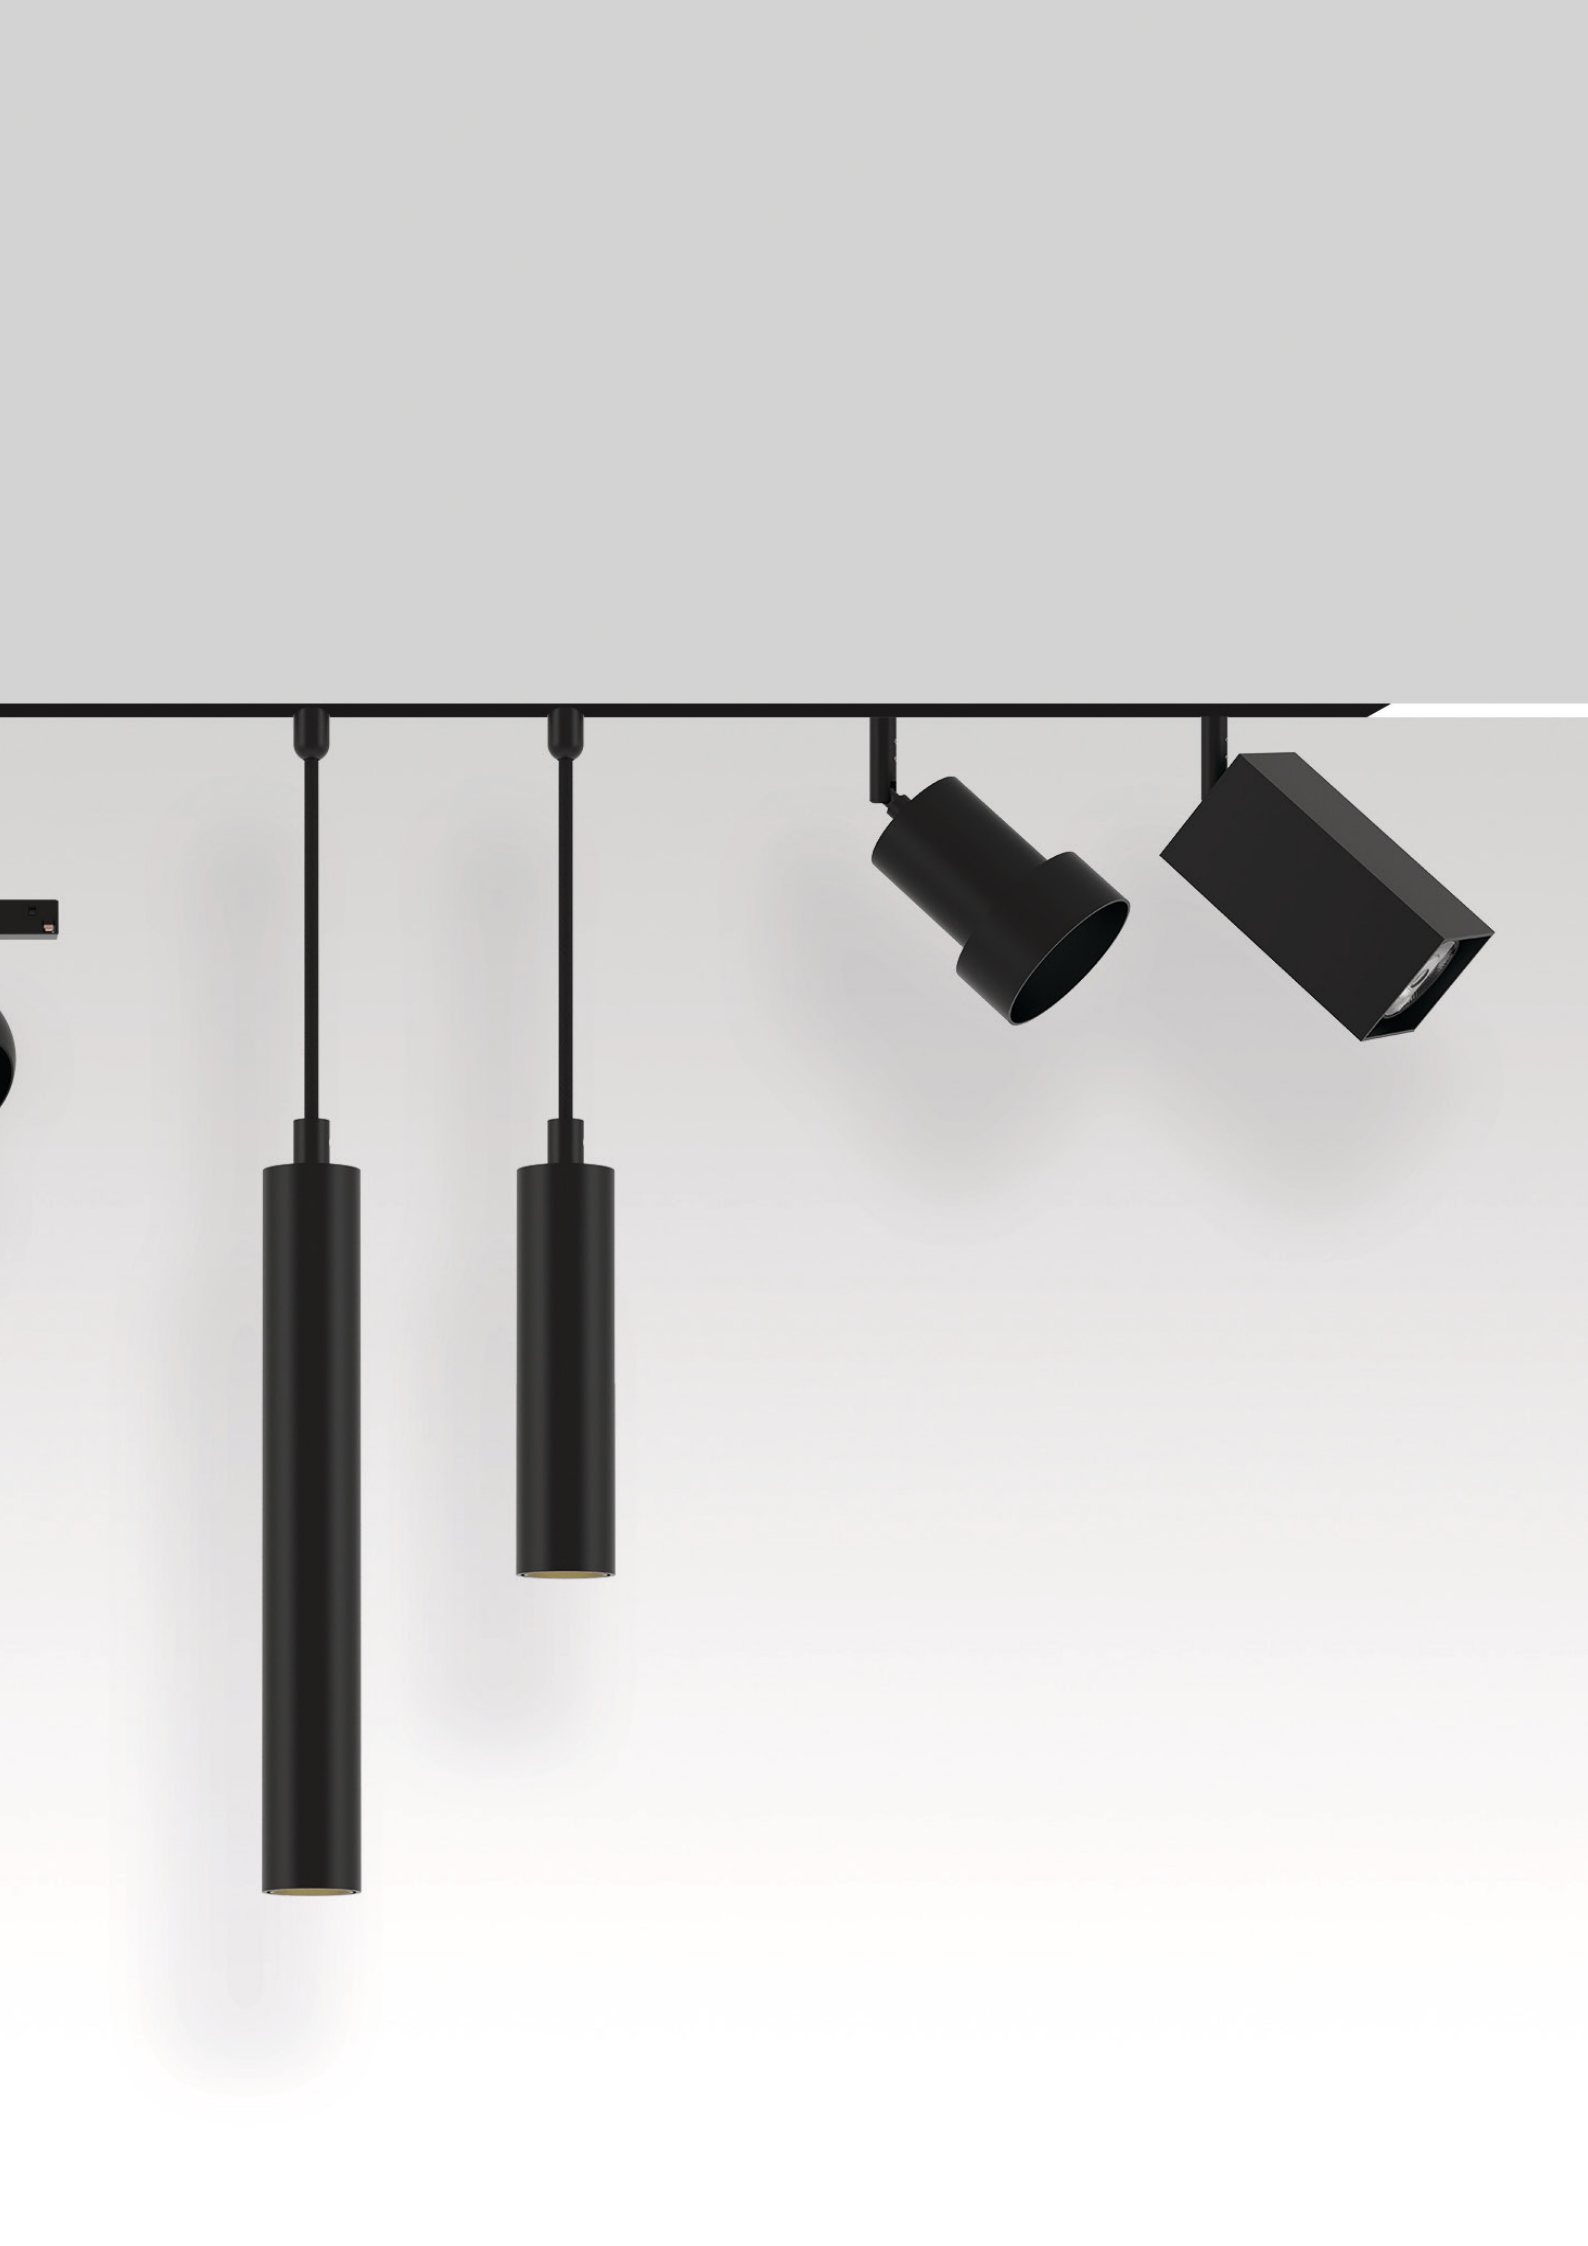

8401/.. - LUCY TRACK

=48V-DC  IP20    



Track 1 meter for 1 circuit + data bus
Schiene 1 Meter für 1 Stromkreis + Datenbus

Dimensions

↔ L1000xB26,2xH21

Materials

aluminium

Ref

8401.1

white

8401.2

black

1 | 2

built-up

max. 15A

8402/.. - LUCY TRACK

=48V-DC  IP20    



Track 2 meter for 1 circuit + data bus
Schiene 2 Meter für 1 Stromkreis + Datenbus

Dimensions

↔ L2000xB26,2xH21

Materials

aluminium

Ref cat (LONG)

8402.1

white

8402.2

black

1 | 2

built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

max. 15A

8403/.. - LUCY TRACK

=48V-DC  IP20    



Track 3 meter for 1 circuit + data bus
Schiene 3 Meter für 1 Stromkreis + Datenbus

Dimensions

↔ L3000xB26,2xH21

Materials

aluminium

Ref cat (LONG)

8403.1

white

8403.2

black


1 | 2

built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

max. 15A

8405/.. - LUCY TRACK



End cap
Endkappe
Coverplate - B26,2xH21xD1,2

Materials
aluminium

Ref

8405.1

8405.2

white

black

1 | 2

built-up

8406/.. - LUCY TRACK



End cap with hole for cable
Endkappe mit ÷ffnung für Kabel
Coverplate - B26,2xH21xD1,2

Materials
aluminium

Ref

8406.1

8406.2

white


black

1 | 2

built-up

8451/.. - LUCY O TRACK

=48V-DC  IP20   

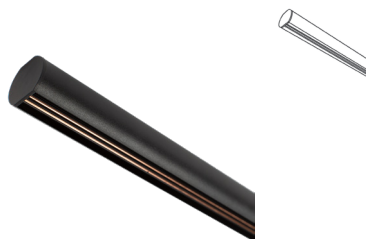

round - Track 1 meter for 1 circuit + data bus
rund - Schiene 1 Meter für 1 Stromkreis + Datenbus

Dimensions

→ Ø32xL1000

Materials

aluminium

1 | 2

Ref

8451.1

white

8451.2

black

built-up

max. 15A

8452/.. - LUCY O TRACK

=48V-DC  IP20   



round - Track 2 meter for 1 circuit + data bus
rund - Schiene 2 Meter für 1 Stromkreis + Datenbus

Dimensions

→ Ø32xL2000

Materials

aluminium

1 | 2

Ref cat (LONG)

8452.1

white

8452.2

black


built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

max. 15A

8453/.. - LUCY O TRACK

=48V-DC  IP20   

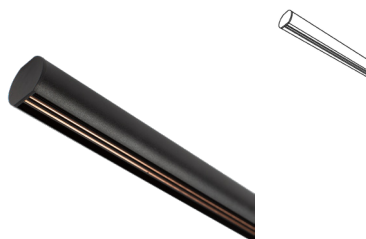

round - Track 3 meter for 1 circuit + data bus
rund - Schiene 3 Meter für 1 Stromkreis + Datenbus

Dimensions

→ Ø32xL3000

Materials

aluminium

1 | 2

Ref cat (LONG)

8453.1

white

8453.2

black

built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

max. 15A

8455/.. - LUCY O TRACK



round - Blind End
rund - Endstück

Dimensions

→ Ø32

Materials

polyamide

1 | 2

Ref

8455.1


white

8455.2

black

built-up

8411/.. - LUCY TRACK



Cover strip 1m
Abdeckleiste 1M

Ref

8411.2

black

Dimensions

↔ L1000



Materials

polyamide

2

built-up

8412/.. - LUCY TRACK



Cover strip 2m
Abdeckleiste 2M

Ref cat (LONG)

8412.2

black

Dimensions

↔ L2000

Materials


polyamide

2

built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

8413/.. - LUCY TRACK



Cover strip 3m
Abdeckleiste 3M

Ref cat (LONG)

8413.2

black

Dimensions

↔ L3000

Materials

polyamide

2

built-up

extra transport cost - long profile
Transportkostenzuschlag - langes Profil

8444/.. - LUCY TRACK



Bracket for suspension
Halter für Aufhängung

Dimensions

↔ L80xB26xH10

Materials

aluminium

Ref

8444.1

white

8444.2

black

1 | 2

built-up

8441/.. - LUCY TRACK



Bracket + pendant set 2.25m
Halterung + Pendel-Set 2,25m
Bracket - L35xB26,2xH10,4

Materials

aluminium

Ref

8441.1

white

8441.2

black

1 | 2

built-up

8456/.. - LUCY O TRACK



round - Connection round profile
rund - Anschluss Rundprofil

Materials

aluminium

Ref

8456.1

white

8456.2

black

1 | 2

built-up

8457/.. - LUCY O TRACK



round - Bracket + pendant set 2.25m
rund - Halterung + Pendel-Set 2,25m

Materials

aluminium

Ref

8457.1

white

8457.2

black

1 | 2

built-up

8445/.. - LUCY TRACK



Cutting tool for track conductors
Schneidewerkzeug für Schienenleiter

Ref
8445




built-up

surface




suspended

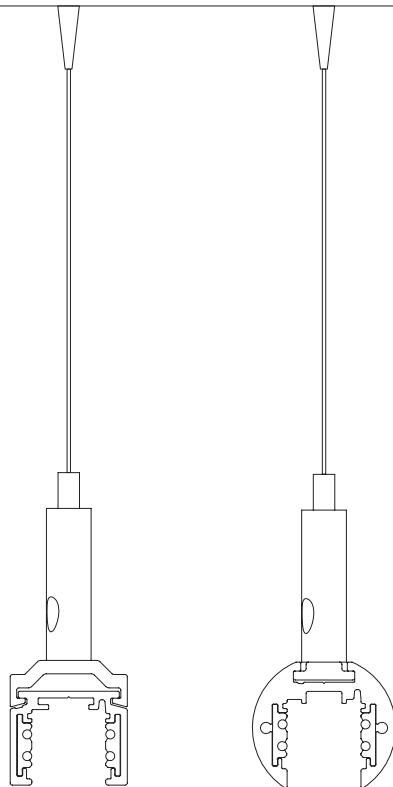

8430/.. - LUCY TRACK

IP20  



Box for track with transfo 48V-DC 60W - with 1 entry for square profile
Box für Schiene mit Trafo 48V-DC 60W - mit 1 Eingang für quadratisches Profil

Dimensions

↔ L250xB50xH50

Materials

aluminium 1M | 2M

Ref

8430.1M


white tex

8430.2M

black tex

8431/.. - LUCY TRACK

IP20  



Box for track with transfo 48V-DC 60W - with 1 entry for round profile
Box für Schiene mit Trafo 48V-DC 60W - mit 1 Eingang für rundes Profil

Dimensions

↔ L250xB50xH50

Materials

aluminium 1M | 2M

Ref

8431.1M


white tex

8431.2M

black tex

8432/.. - LUCY TRACK

IP20  



Box for track with transfo 48V-DC 60W - with 2 entries for square profile
Box für Schiene mit Trafo 48V-DC 60W - mit 2 Eingängen für quadratisches Profil

Dimensions

↔ L250xB50xH50

Materials

aluminium 1M | 2M

Ref

8432.1M


white tex

8432.2M

black tex

8433/.. - LUCY TRACK

IP20  



Box for track with transfo 48V-DC 60W - with 2 entries for round profile
Box für Schiene mit Trafo 48V-DC 60W - mit 2 Eingängen für rundes Profil

Dimensions

↔ L250xB50xH50

Materials

aluminium 1M | 2M

Ref

8433.1M

white tex

8433.2M

black tex

8420/.. - LUCY TRACK

=48V-DC  IP20    



End feed polarized left
Endeinspeisung links gepolt

Materials

polyamide

Ref

8420.1

white

8420.2

black

1 | 2

built-up

max. 15A

8421/.. - LUCY TRACK

=48V-DC  IP20    



End feed polarized right
Endeinspeisung rechts polarisiert

Dimensions

↔ L111,7

Materials

polyamide

Ref

8421.1

white

8421.2

black


1 | 2

built-up

max. 15A

8422/.. - LUCY TRACK

=48V-DC  IP20    

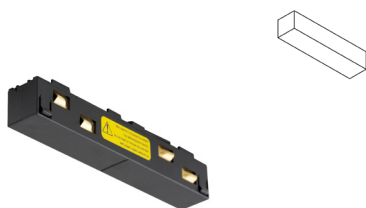

Jointing connector polarized
Verbinder gepolt

Dimensions

↔ L10,5

Materials

polyamide

Ref

8422.1

white

8422.2

black

1 | 2

built-up

max. 15A

8423/.. - LUCY TRACK

=48V-DC  IP20    



L-connector - polarized external
L-Verbindung - extern polarisiert

Dimensions

↔ L104,6xB18,7

Materials

polyamide

Ref

8423.1

white

8423.2

black

1 | 2

built-up

Please attach drawing to the order!

Bitte eine Zeichnung an der Bestellung hinzufügen!

8424/.. - LUCY TRACK

=48V-DC  IP20    



L-connector - polarized internal
L-Verbindung - intern polarisiert

Dimensions

↔ L104,6xB18,7

Materials

polyamide

Ref

8424.1

white

8424.2

black

1 | 2

built-up

Please attach drawing to the order!

Bitte eine Zeichnung an der Bestellung hinzufügen!

8440/.. - LUCY TRACK

=48V-DC  IP20    



Connector with adjustable corner
Verbindung mit einstellbarer Ecke

Dimensions

↔ L273,5

Materials

polyamide

Ref

8440.1

white

8440.2


black

1 | 2

built-up



Adaptor article

8381	on/off						
8382	1/10V						
8384	DALI						
8388	Casambi						

FAMILY

JACOB

JACOB

JACOB WALL

JACOB XL

SUZETTE

BABETTE

Spot article

Current

Flux

Output

CRI

Beam

load/spot

3978	3982
350mA	500mA
410lm	555lm
4W	5.8W
90	90
48°	48°
160g	170g

3974.300
500mA
555lm
5.8W
90
48°
g

3974.300
500mA
555lm
5.8W
90
48°
g


3800
500mA
690lm
6.2W
97
40°
240g

2740
500mA
690lm
6.2W
97
40°
g


3117
500mA
965lm
6.6W
80
38°
385g





LOAD SCHEME

standard

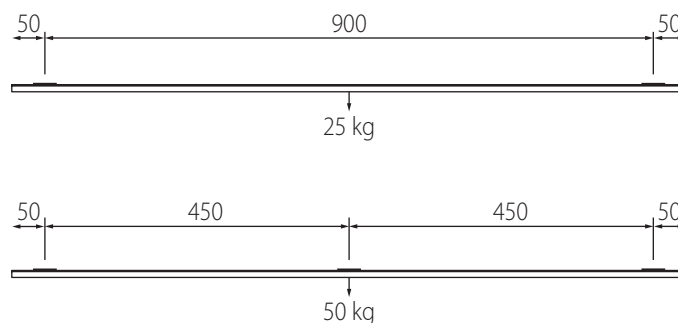





trimless/pendant

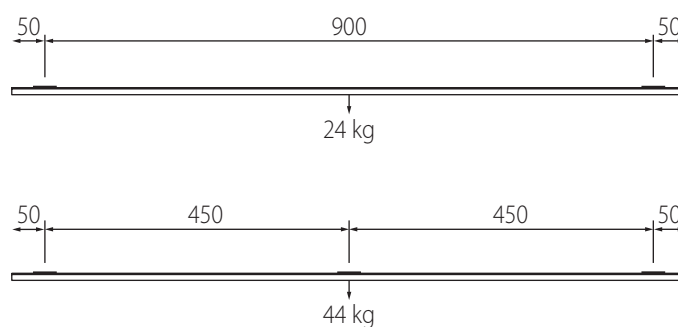

				
CAPA XT	FIXER	MERO	MERO	TONDO
7600.AC	7605	7879	7878	7535
350mA	350mA	700mA	700mA	500mA
1200lm	1200lm	1300lm	1300lm	965lm
12.2W	12.2W	9.5W	9.5W	6.6W
92	92	80	80	80
36°	36°	40°	40°	40°
350 - alu 450g - brass	420g	350g	450g	350g

Adaptor article

8381	on/off
8382	1/10V
8384	DALI
8388	Casambi

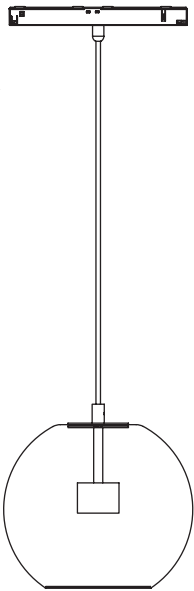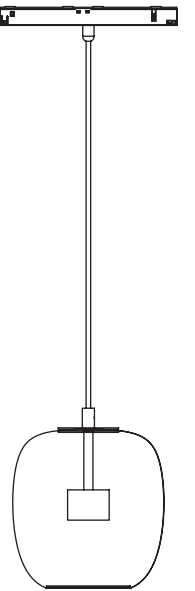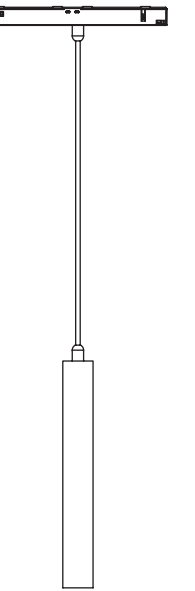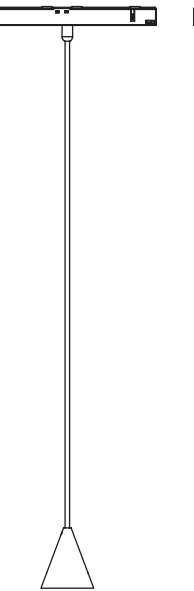				
MOBY	MOBY DECO	JACOB	SUZETTE	BABETTE
3991	3992	3973.300	2741	3118
500mA	500mA	500mA	500mA	500mA
965lm	965lm	555lm	690lm	965lm
6.6W	6.6W	5.8W	6.2W	6.6W
80	80	90	97	80
38°	38°	48°	40°	38°
385g	385g	170g		385g

mechanical

LUCY
ON/OFF SERIES



8381.3978/.. - LUCY JACOB ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 410lm CRI90 max. 4W 350mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8381.3978.1M	NW WW
8381.3978.2M	NW WW
8381.3978.29	NW WW
8381.3978.49	NW WW

built-up

8381.3982/.. - LUCY JACOB ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8381.3982.1M	NW WW
8381.3982.2M	NW WW
8381.3982.29	NW WW
8381.3982.49	NW WW

built-up

8381.3974.300/.. - LUCY JACOB L ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH345 48° reflector
Head - Ø40xH300

Ref

8381.3974.300.1M	NW WW
8381.3974.300.2M	NW WW
8381.3974.300.29	NW WW
8381.3974.300.49	NW WW

built-up

8381.3975/.. - LUCY JACOB WALL ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional
Aufbaustrahler mit Adapter - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH165 48° reflector
Head - Ø40xH125

Ref

8381.3975.1M	NW WW
8381.3975.2M	NW WW
8381.3975.16	NW WW
8381.3975.29	NW WW
8381.3975.49	NW WW

built-up

To point to the wall
Auf die Wand zu richten

8381.3800/.. - LUCY JACOB XL ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional - CRI97
Aufbaustrahler mit Adapter - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø50xH156 30° reflector

Housing - Ø50xH120

Ref

8381.3800.1M

NW | WW

8381.3800.2M

NW | WW

8381.3800.29

NW | WW

8381.3800.49

NW | WW

built-up

8381.7600/.. - LUCY CAPA X ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI92
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI92

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø58xH180 36° reflector

Head - Ø58xH130

Ref

8381.7600.1M

NW | WW

8381.7600.2M

NW | WW

built-up

8381.7878/.. - LUCY MERO ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø80xH170 40° reflector

Head - Ø80xH120

Ref

8381.7878.1M

NW | WW

8381.7878.2M

NW | WW

built-up

CRI90-95 on request
CRI90-95 auf Anfrage

8381.7879/.. - LUCY MERO ON/OFF ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø60xH180 40° reflector

Head - Ø60xH130

Ref

8381.7879.1M

NW | WW

8381.7879.2M

NW | WW

built-up

8381.2740/.. - LUCY SUZETTE ON/OFF ADAPTOR

48V-DC



IP20



0,5 m

5,6



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø70xH109 30° reflector

Ref

8381.2740.1M NW | WW
8381.2740.2M NW | WW

built-up

8381.3117/.. - LUCY BABETTE ON/OFF ADAPTOR

48V-DC



IP20



0,5 m

5,6



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8381.3117.1M NW | WW
8381.3117.2M NW | WW
8381.3117.29 NW | WW
8381.3117.49 NW | WW

built-up

8381.7535/.. - LUCY TONDO ON/OFF ADAPTOR

48V-DC



IP20



0,5 m

5,6



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamp type

1x LED 965lm CRI80 max. 6,6W 500mA

Dimensions

Ø75xH100 40° reflector

Reflector - Ø70

Ref

8381.7535.1M NW | WW
8381.7535.2M NW | WW

built-up

8381.7605/.. - LUCY FIXER ON/OFF ADAPTOR

48V-DC



IP20



0,5 m

5,6



built-up spot with adaptor - square - directional - CRI92
Aufbaustrahler mit Adapter - viereckig - schwenkbar - CRI92

Lamp type

1x LED 1200lm CRI92 max. 12,2W 350mA

Dimensions

L60xB60xH185 36° reflector

Head - L60xB60xH125

Ref

8381.7605.1M NW | WW
8381.7605.2M NW | WW

built-up

8381.3973.300/.. - LUCY JACOB ON/OFF ADAPTOR - TX

48V-DC



IP20



0 m



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 639lm CRI80 max. 5,6W

500mA

Dimensions

Ø40xH300 48° reflector

Ref

8381.3973.300.1M.TX1	NW WW
8381.3973.300.2M.TX2	NW WW
8381.3973.300.16.TXM	NW WW
8381.3973.300.29.TX2	NW WW
8381.3973.300.49.TX1	NW WW

built-up

CRI 90 on request
CRI 90 auf Anfrage

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8381.2741/.. - LUCY SUZETTE ON/OFF ADAPTOR

48V-DC



IP20



0 m



built-up spot M10 - round - with textile cable
Aufbaustrahler M10 - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø80xH109 30° reflector

Ref

8381.2741.1M.TX1	NW WW
8381.2741.2M.TX2	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8381.3118/.. - LUCY BABETTE ON/OFF ADAPTOR

48V-DC



IP20



0 m



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø80xH109 28° reflector

Ref

8381.3118.1M.TX1	NW WW
8381.3118.2M.TX2	NW WW
8381.3118.16.TX4	NW WW
8381.3118.29.TX2	NW WW
8381.3118.49.TX1	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8381.3991/.. - LUCY MOBY ON/OFF ADAPTOR - TX

48V-DC



IP20



0 m



0,5 m



5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø245xH210

Ref

8381.3991.TR.1M.TX1

NW | WW

8381.3991.TR.2M.TX2

NW | WW

8381.3991.TR.16.TX4

NW | WW

8381.3991.TR.16.TXM

NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8381.3992/.. - LUCY MOBY ON/OFF ADAPTOR - TX

48V-DC



IP20



0 m



0,5 m



5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø200xH210

Ref

8381.3992.TR.1M.TX1

NW | WW

8381.3992.TR.2M.TX2

NW | WW

8381.3992.TR.16.TX4

NW | WW

8381.3992.TR.16.TXM

NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an



LUCY
1/10V SERIES



8382.3978/.. - LUCY JACOB 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 410lm CRI90 max. 4W 350mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8382.3978.1M	NW WW
8382.3978.2M	NW WW
8382.3978.29	NW WW
8382.3978.49	NW WW

built-up

8382.3982/.. - LUCY JACOB 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8382.3982.1M	NW WW
8382.3982.2M	NW WW
8382.3982.29	NW WW
8382.3982.49	NW WW

built-up

8382.3974.300/.. - LUCY JACOB L 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH345 48° reflector
Head - Ø40xH300

Ref

8382.3974.300.1M	NW WW
8382.3974.300.2M	NW WW
8382.3974.300.29	NW WW
8382.3974.300.49	NW WW

built-up

8382.3975/.. - LUCY JACOB WALL 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional
Aufbaustrahler mit Adapter - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH165 48° reflector
Head - Ø40xH125

Ref

8382.3975.1M	NW WW
8382.3975.2M	NW WW
8382.3975.16	NW WW
8382.3975.29	NW WW
8382.3975.49	NW WW

built-up
To point to the wall
Auf die Wand zu richten

8382.3800/.. - LUCY JACOB XL 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional - CRI97
Aufbaustrahler mit Adapter - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø50xH156 30° reflector

Housing - Ø50xH120

Ref

8382.3800.1M

NW | WW

8382.3800.2M

NW | WW

8382.3800.29

NW | WW

8382.3800.49

NW | WW

built-up

8382.7600/.. - LUCY CAPA X 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI92
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI92

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø58xH180 36° reflector

Head - Ø58xH130

Ref

8382.7600.1M

NW | WW

8382.7600.2M

NW | WW

built-up

8382.7878/.. - LUCY MERO 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø80xH170 40° reflector

Head - Ø80xH120

Ref

8382.7878.1M

NW | WW

8382.7878.2M

NW | WW

built-up

CRI90-95 on request
CRI90-95 auf Anfrage

8382.7879/.. - LUCY MERO 1/10V ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø60xH180 40° reflector

Head - Ø60xH130

Ref

8382.7879.1M

NW | WW

8382.7879.2M

NW | WW

built-up

8382.2740/.. - LUCY SUZETTE 1/10V ADAPTOR

48V-DC



IP20



0,5 m

built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97**Lamp type**

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 30° reflector

Ref

8382.2740.1M

NW

8382.2740.2M

NW

built-up

8382.3117/.. - LUCY BABETTE 1/10V ADAPTOR

48V-DC



IP20



0,5 m

built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97**Lamp type**

1x LED 965lm CRI80 max. 6,6W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8382.3117.1M

NW | WW

8382.3117.2M

NW | WW

8382.3117.16

NW | WW

8382.3117.29

NW | WW

8382.3117.49

NW | WW

built-up

8382.7535/.. - LUCY TONDO 1/10V ADAPTOR

48V-DC



IP20



0,5 m

built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80**Lamp type**

1x LED 965lm CRI80 max. 6,6W 500mA

Dimensions

Ø75xH100 40° reflector

Reflector - Ø70

Ref

8382.7535.1M

NW | WW

8382.7535.2M

NW | WW

built-up

8382.7605/.. - LUCY FIXER 1/10V ADAPTOR

48V-DC



IP20



0,5 m

built-up spot with adaptor - square - directional - CRI92
Aufbaustrahler mit Adapter - viereckig - schwenkbar - CRI92**Lamp type**

1x LED 1200lm CRI92 max. 12,2W 350mA

Dimensions

L60xB60xH185 36° reflector

Head - L60xB60xH125

Ref

8382.7605.1M

NW | WW

8382.7605.2M

NW | WW

built-up

8382.3973.300/.. - LUCY JACOB 1/10V ADAPTOR

48V-DC



IP20



0 m


suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 639lm CRI80 max. 5,6W 500mA

Dimensions

Ø40xH300 48° reflector

Ref

8382.3973.300.1M.TX1	NW WW
8382.3973.300.2M.TX2	NW WW
8382.3973.300.16.TXM	NW WW
8382.3973.300.29.TX2	NW WW
8382.3973.300.49.TX1	NW WW

built-up

CRI 90 on request
CRI 90 auf Anfrage

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8382.2741/.. - LUCY SUZETTE 1/10V ADAPTOR

48V-DC



IP20



0 m


suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 30° reflector

Ref

8382.2741.1M.TX1	NW WW
8382.2741.2M.TX2	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8382.3118/.. - LUCY BABETTE 1/10V ADAPTOR

48V-DC



IP20



0 m


suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8382.3118.1M.TX1	NW WW
8382.3118.2M.TX2	NW WW
8382.3118.16.TX4	NW WW
8382.3118.29.TX2	NW WW
8382.3118.49.TX1	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an



8382.3991/.. - LUCY MOBY 1/10V ADAPTOR - TX

48V-DC



IP20

suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel**Lamptype**

1x LED 1630lm CRI80 max. 11,4W 500mA

Dimensions

Ø245xH210

Ref

8382.3991.TR.1M.TX1 NW | WW

8382.3991.TR.2M.TX2 NW | WW

8382.3991.TR.16.TX4 NW | WW

8382.3991.TR.16.TXM NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8382.3992/.. - LUCY MOBY 1/10V ADAPTOR

48V-DC



IP20

suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel**Lamptype**

1x LED 1630lm CRI80 max. 11,4W 500mA

Dimensions

Ø200xH210

Ref

8382.3992.TR.1M.TX1 NW | WW

8382.3992.TR.2M.TX2 NW | WW

8382.3992.TR.16.TX4 NW | WW

8382.3992.TR.16.TXM NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

LUCY
DALI SERIES



8384.3978/.. - LUCY JACOB DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 410lm CRI90 max. 4W 350mA

Dimensions

Ø40xH130 48° reflector

Head - Ø40xH85

Ref

8384.3978.1M	NW WW
8384.3978.2M	NW WW
8384.3978.29	NW WW
8384.3978.49	NW WW

built-up

8384.3982/.. - LUCY JACOB DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH130 48° reflector

Head - Ø40xH85

Ref

8384.3982.1M	NW WW
8384.3982.2M	NW WW
8384.3982.29	NW WW
8384.3982.49	NW WW

built-up

8384.3974.300/.. - LUCY JACOB L DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH345 48° reflector

Head - Ø40xH300

Ref

8384.3974.300.1M	NW WW
8384.3974.300.2M	NW WW
8384.3974.300.29	NW WW
8384.3974.300.49	NW WW

built-up

8384.3975/.. - LUCY JACOB WALL DALI ADAPTOR

48V-DC



built-up spot with adaptor - directional
Aufbaustrahler mit Adapter - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH165 48° reflector

Head - Ø40xH125

Ref

8384.3975.1M	NW WW
8384.3975.2M	NW WW
8384.3975.16	NW WW
8384.3975.29	NW WW
8384.3975.49	NW WW

built-up

To point to the wall
Auf die Wand zu richten

8384.3800/.. - LUCY JACOB XL DALI ADAPTOR

48V-DC



built-up spot with adaptor - directional - CRI97
Aufbaustrahler mit Adapter - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø50xH156 30° reflector
Housing - Ø50xH120

Ref

8384.3800.1M	NW WW
8384.3800.2M	NW WW
8384.3800.29	NW WW
8384.3800.49	NW WW

built-up

8384.7600/.. - LUCY CAPA X DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI92
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI92

Lamptype

1x LED 1200lm CRI92 max. 12,2W 350mA

Dimensions

Ø58xH180 36° reflector
Head - Ø58xH130

Ref

8384.7600.1M	NW WW
8384.7600.2M	NW WW

built-up

8384.7878/.. - LUCY MERO DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W 700mA

Dimensions

Ø80xH170 40° reflector
Head - Ø80xH120

Ref

8384.7878.1M	NW WW
8384.7878.2M	NW WW

built-up

CRI90-95 on request
CRI90-95 auf Anfrage

8384.7879/.. - LUCY MERO DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W 700mA

Dimensions

Ø60xH180 40° reflector
Head - Ø60xH130

Ref

8384.7879.1M	NW WW
8384.7879.2M	NW WW

built-up

8384.2740/.. - LUCY SUZETTE DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 30° reflector

Ref

8384.2740.1M NW | WW
8384.2740.2M NW | WW

built-up

8384.3117/.. - LUCY BABETTE DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8384.3117.1M NW | WW
8384.3117.2M NW | WW
8384.3117.16 NW | WW
8384.3117.29 NW | WW
8384.3117.49 NW | WW

built-up

8384.7535/.. - LUCY TONDO DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 965lm CRI80 max. 6,6W 500mA

Dimensions

Ø75xH100 40° reflector

Reflector - Ø70

Ref

8384.7535.1M NW | WW
8384.7535.2M NW | WW

built-up

8384.7605/.. - LUCY FIXER DALI ADAPTOR

48V-DC



built-up spot with adaptor - square - directional - CRI92
Aufbaustrahler mit Adapter - viereckig - schwenkbar - CRI92

Lamptype

1x LED 1200lm CRI92 max. 12,2W 350mA

Dimensions

L60xB60xH185 36° reflector

Head - L60xB60xH125

Ref

8384.7605.1M NW | WW
8384.7605.2M NW | WW

built-up

8384.3973.300/.. - LUCY JACOB DALI ADAPTOR

48V-DC



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 639lm CRI80 max. 5,6W 500mA

Dimensions

Ø40xH300 48° reflector

Ref

8384.3973.300.1M.TX1	NW WW
8384.3973.300.2M.TX2	NW WW
8384.3973.300.16.TXM	NW WW
8384.3973.300.29.TX2	NW WW
8384.3973.300.49.TX1	NW WW

built-up

CRI 90 on request
CRI 90 auf Anfrage

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8384.2741/.. - LUCY SUZETTE DALI ADAPTOR

48V-DC



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 30° reflector

Ref

8384.2741.1M.TX1	NW WW
8384.2741.2M.TX2	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8384.3118/.. - LUCY BABETTE DALI ADAPTOR

48V-DC



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8384.3118.1M.TX1	NW WW
8384.3118.2M.TX2	NW WW
8384.3118.16.TX4	NW WW
8384.3118.29.TX2	NW WW
8384.3118.49.TX1	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8384.3991/.. - LUCY MOBY DALI ADAPTOR

48V-DC



IP20



0 m

0,5 m

5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø245xH210

Ref

8384.3991.TR.1M.TX1

NW | WW

8384.3991.TR.2M.TX2

NW | WW

8384.3991.TR.16.TX4

NW | WW

8384.3991.TR.16.TXM

NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8384.3992/.. - LUCY MOBY DALI ADAPTOR

48V-DC



IP20



0 m

0,5 m

5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø200xH210

Ref

8384.3992.TR.1M.TX1

NW | WW

8384.3992.TR.2M.TX2

NW | WW

8384.3992.TR.16.TX4

NW | WW

8384.3992.TR.16.TXM


NW | WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

wireless dimming
dim up to 32 Dali luminaires
in a maximum of 4 groups

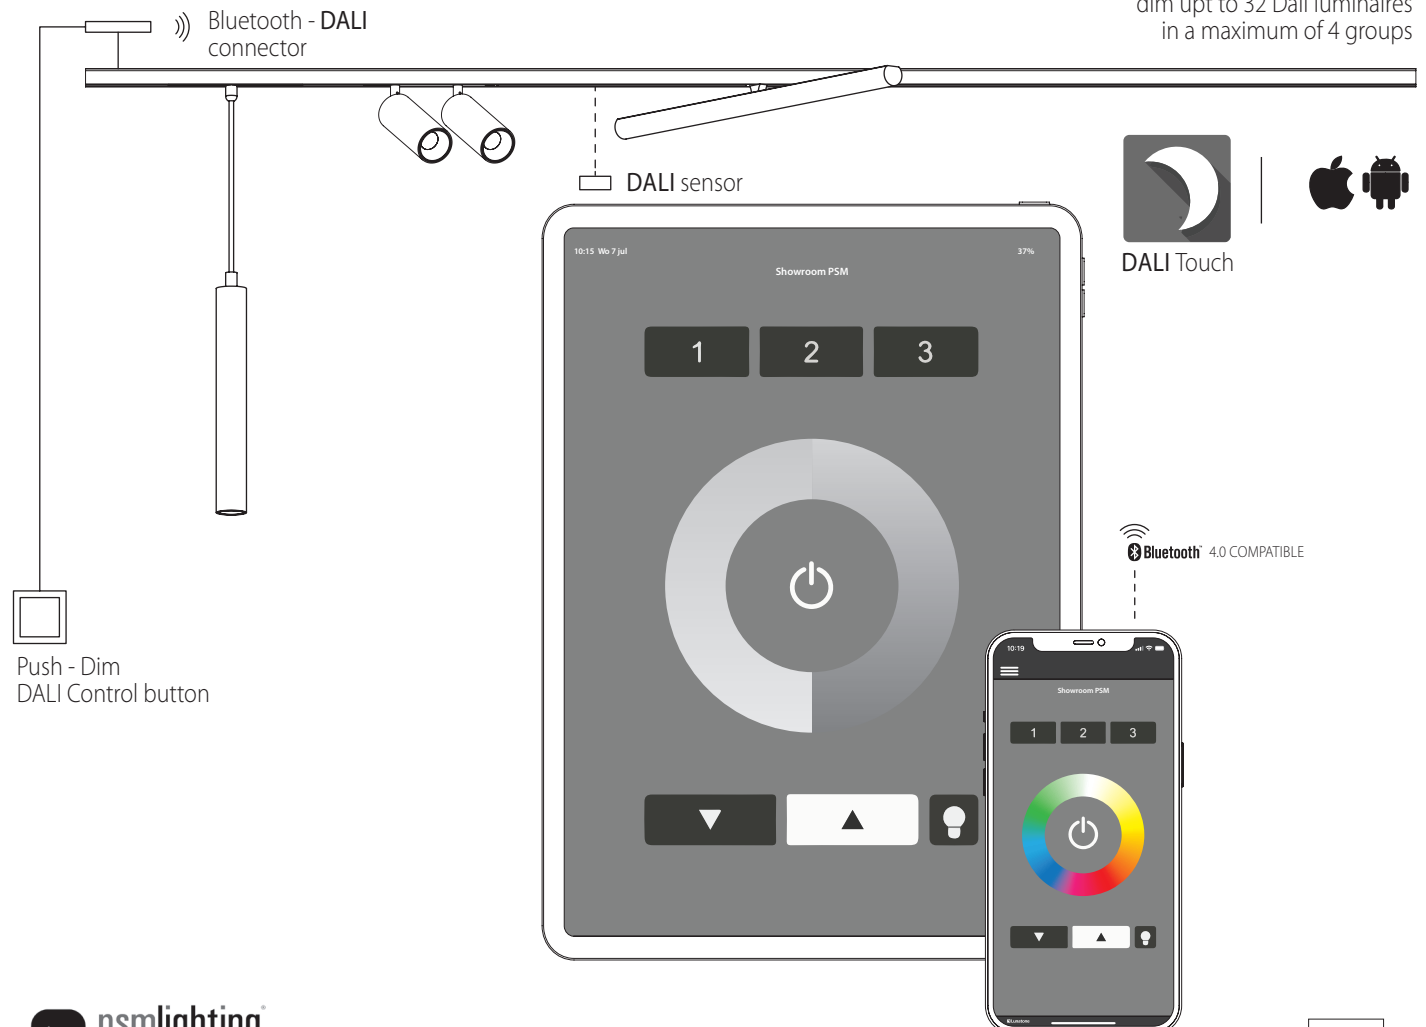

LUCY
CASAMBI SERIES



8388.3978/.. - LUCY JACOB CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 410lm CRI90 max. 4W 350mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8388.3978.1M	NW WW
8388.3978.2M	NW WW
8388.3978.29	NW WW
8388.3978.49	NW WW

built-up

8388.3982/.. - LUCY JACOB CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH130 48° reflector
Head - Ø40xH85

Ref

8388.3982.1M	NW WW
8388.3982.2M	NW WW
8388.3982.29	NW WW
8388.3982.49	NW WW

built-up

8388.3974.300/.. - LUCY JACOB L CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH345 48° reflector
Head - Ø40xH300

Ref

8388.3974.300.1M	NW WW
8388.3974.300.2M	NW WW
8388.3974.300.29	NW WW
8388.3974.300.49	NW WW

built-up

8388.3975/.. - LUCY WALL CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional
Aufbaustrahler mit Adapter - schwenkbar - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W 500mA

Dimensions

Ø40xH165 48° reflector
Head - Ø40xH125

Ref

8388.3975.1M	NW WW
8388.3975.2M	NW WW
8388.3975.16	NW WW
8388.3975.29	NW WW
8388.3975.49	NW WW

built-up
To point to the wall
Auf die Wand zu richten

8388.3800/.. - LUCY JACOB XL CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - directional - CRI97
Aufbaustrahler mit Adapter - schwenkbar - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø50xH156 30°

Housing - Ø50xH120

Ref

8388.3800.1M

NW | WW

8388.3800.2M

NW | WW

8388.3800.29

NW | WW

8388.3800.49

NW | WW

built-up

8388.7600/.. - LUCY CAPA X CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI92
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI92

Lamptype

1x LED 1200lm CRI92 max. 12,2W

350mA

Dimensions

Ø58xH180 36° reflector

Head - Ø58xH130

Ref

8388.7600.1M

NW | WW

8388.7600.2M

NW | WW

built-up

8388.7878/.. - LUCY MERO CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø80xH170 40° reflector

Head - Ø80xH120

Ref

8388.7878.1M

NW | WW

8388.7878.2M

NW | WW

built-up

CRI90-95 on request

CRI90-95 auf Anfrage

8388.7879/.. - LUCY MERO CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamptype

1x LED 1300lm CRI80 max. 9,5W

700mA

Dimensions

Ø60xH180 40° reflector

Head - Ø60xH130

Ref

8388.7879.1M

NW | WW

8388.7879.2M

NW | WW

8388.7879.16

NW | WW

built-up

8388.2740/.. - LUCY SUZETTE CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 30° reflector

Ref

8388.2740.1M NW | WW
8388.2740.2M NW | WW

built-up

8388.3117/.. - LUCY BABETTE CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI97
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI97

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø80xH109 28° reflector

Ref

8388.3117.1M NW | WW
8388.3117.2M NW | WW
8388.3117.16 NW | WW
8388.3117.29 NW | WW
8388.3117.49 NW | WW

built-up

8388.7535/.. - LUCY TONDO CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI80
Aufbaustrahler mit Adapter - rund - schwenkbar - CRI80

Lamp type

1x LED 965lm CRI80 max. 6,6W 500mA

Dimensions

Ø75xH100 40° reflector

Reflector - Ø70

Ref

8388.7535.1M NW | WW
8388.7535.2M NW | WW

built-up

8388.7605/.. - LUCY FIXER CASAMBI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - square - directional - CRI92
Aufbaustrahler mit Adapter - viereckig - schwenkbar - CRI92

Lamp type

1x LED 1200lm CRI92 max. 12,2W 350mA

Dimensions

L60xB60xH185 36° reflector

Head - L60xB60xH125

Ref

8388.7605.1M NW | WW
8388.7605.2M NW | WW

built-up

8388.3973.300/.. - LUCY JACOB CASAMBI ADAPTOR

48V-DC



IP20



0 m



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamptype

1x LED 555lm CRI90 max. 5,8W

500mA

Dimensions

Ø40xH130 48° reflector

Head - Ø40xH85

Ref

8388.3973.300.1M.TX1	NW WW
8388.3973.300.2M.TX2	NW WW
8388.3973.300.16.TXM	NW WW
8388.3973.300.29.TX2	NW WW
8388.3973.300.49.TX1	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8388.2741/.. - LUCY SUZETTE CASAMBI ADAPTOR

48V-DC



IP20



0 m



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø80xH109 30° reflector

Ref

8388.2741.1M.TX1	NW WW
8388.2741.2M.TX2	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8388.3118/.. - LUCY BABETTE CASAMBI ADAPTOR

48V-DC



IP20



0 m



suspension with adaptor - round - with textile cable
Hängelampe mit Adapter - rund - mit Textilkabel

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø80xH109 28° reflector

Ref

8388.3118.1M	NW WW
8388.3118.2M	NW WW
8388.3118.16	NW WW
8388.3118.29	NW WW
8388.3118.49	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8388.3991/.. - LUCY MOBY CASAMBI ADAPTOR

48V-DC



IP20



0 m

0,5 m

5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø245xH210

Ref

8388.3991.TR.1M.TX1	NW WW
8388.3991.TR.2M.TX2	NW WW
8388.3991.TR.16.TX4	NW WW
8388.3991.TR.16.TXM	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an

8388.3992/.. - LUCY MOBY CASAMBI ADAPTOR

48V-DC



IP20



0 m

0,5 m

5,6



suspension with adaptor - with textile cable
Hängelampe mit Adapter - mit Textilkabel

Lamp type

1x LED 1630lm CRI80 max. 11,4W

500mA

Dimensions

Ø200xH210

Ref

8388.3992.TR.1M.TX1	NW WW
8388.3992.TR.2M.TX2	NW WW
8388.3992.TR.16.TX4	NW WW
8388.3992.TR.16.TXM	NW WW

built-up

Please state the exact length of the textile cable when ordering

Bitte geben Sie bei der Bestellung die genaue Länge des Textilkabels an






Bluetooth 4.0 compatible

READY
CASAMBI

wireless dimming
dim up to 63 Dali luminaires
in a maximum of 4 groups




Remote control
Sensor data
SW updates
configuration

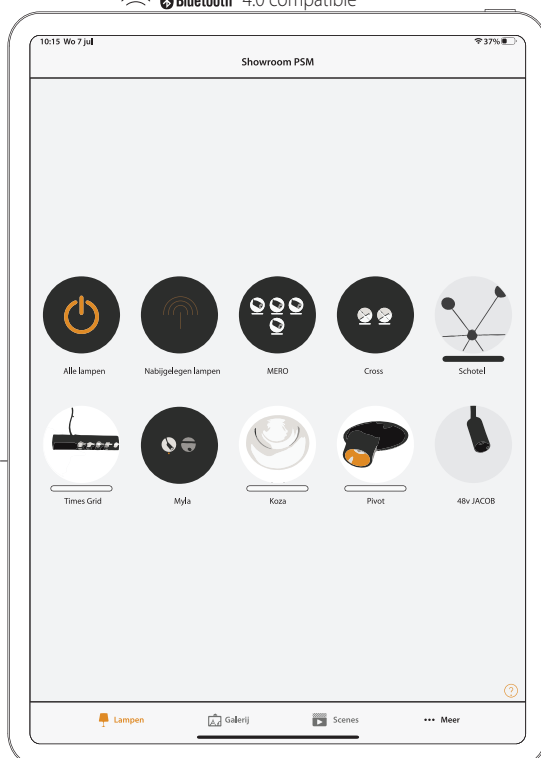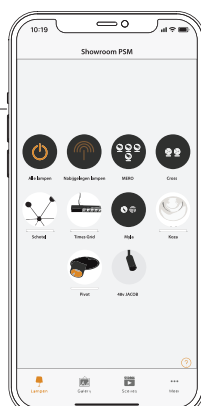


Smart wall
switches

LUCY ADAPTORS



LUCY SINGLE SPOT ADAPTOR 48V | **ON/OFF**
max load: 1kg

8600.O.350MA
8600.O.500MA
8600.O.700MA



LUCY SINGLE SPOT ADAPTOR 48V | **BLUETOOTH CASAMBI**
max load: 1kg


8601.B.250MA
8601.B.350MA
8601.B.500MA
8601.B.700MA

LUCY SINGLE SPOT ADAPTOR 48V | **DALI**
max load: 1kg

8601.B.250MA
8601.B.350MA
8601.B.500MA
8601.B.700MA

LUCY SINGLE SPOT ADAPTOR 48V | **1-10V**
max load: 1kg

8601.B.250MA
8601.B.350MA
8601.B.500MA
8601.B.700MA



LUCY SINGLE SPOT ADAPTOR 48V | **ON/OFF**
mechanical
max load: 2kg

8600.M.O.350MA
8600.M.O.500MA
8600.M.O.700MA

LUCY SINGLE SPOT ADAPTOR 48V | **BLUETOOTH CASAMBI**
mechanical
max load: 2kg


8601.M.B.250MA
8601.M.B.350MA
8601.M.B.500MA
8601.M.B.700MA

LUCY SINGLE SPOT ADAPTOR 48V | **DALI**
mechanical
max load: 2kg

8601.M.D.250MA
8601.M.D.350MA
8601.M.D.500MA
8601.M.D.700MA


LUCY SINGLE SPOT ADAPTOR 48V | **1-10V**
mechanical
max load: 2kg

8601.M.T.250MA
8601.M.T.350MA
8601.M.T.500MA
8601.M.T.700MA




8602.DS.250MA
8602.DS.350MA
8602.DS.500MA
8602.DS.700MA
max load: 1kg

LUCY DOUBLE SPOT ADAPTER 48V | **DALI IN SERIE**



8602.M.DS.250MA
8602.M.DS.350MA
8602.M.DS.500MA
8602.M.DS.700MA
mechanical
max load: 2kg

LUCY DOUBLE SPOT ADAPTER 48V | **DALI IN SERIE**

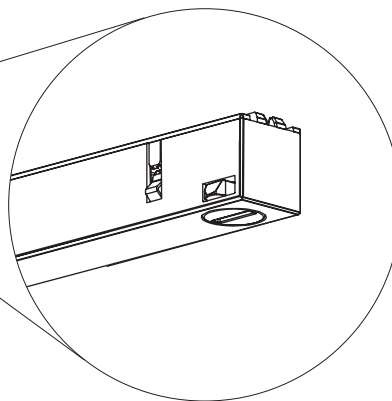

8600.O.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | ON/OFF

=48V-DC  IP20    



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L98

Materials

polyamide

Ref

8600.O.350MA.1

white

8600.O.350MA.2

black

1 | 2

built-up
max 1kg
350mA / max. 16,5W

8600.O.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | ON/OFF

=48V-DC  IP20    



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L98

Materials

polyamide

Ref

8600.O.500MA.1

white

8600.O.500MA.2

black

1 | 2

built-up
max 1kg
500mA / max. 24W

8600.O.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | ON/OFF

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L98

Materials

polyamide

Ref

8600.O.700MA.1

white

8600.O.700MA.2

black

1 | 2

built-up
max 1kg
700mA / max. 33W

8601.T.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.T.250MA.1 white
8601.T.250MA.2 black

built-up
max. 1kg
250mA / max. 12W

8601.T.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.T.350MA.1 white
8601.T.350MA.2 black

built-up
max. 1kg
350mA / max. 16,5W

8601.T.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.T.500MA.1 white
8601.T.500MA.2 black

built-up
max. 1kg
500mA / max. 24W

8601.T.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.T.700MA.1 white
8601.T.700MA.2 black

built-up
max. 1kg
700mA / max. 33W

8601.M.T.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.T.250MA.1 white
8601.M.T.250MA.2 black

built-up
max. 2kg
250mA / max. 12W

8601.M.T.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20    0,0300



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.T.350MA.1 white
8601.M.T.350MA.2 black

built-up
max. 2kg
350mA / max. 16,5W

8601.M.T.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20    0,1000



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.T.500MA.1 white
8601.M.T.500MA.2 black

built-up
max. 2kg
500mA / max. 24W

8601.M.T.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | 1-10V

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.T.700MA.1 white
8601.M.T.700MA.2 black

built-up
max. 2kg
700mA / max. 33W

8601.D.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.D.250MA.1 white
8601.D.250MA.2 black

built-up
max. 1kg
250mA / max. 12W

8601.D.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20    0,1100 



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.D.350MA.1 white
8601.D.350MA.2 black

built-up
max. 1kg
350mA / max. 16,5W

8601.D.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20    0,1100 



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.D.500MA.1 white
8601.D.500MA.2 black

built-up
max. 1kg
500mA / max. 24W

8601.D.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.D.700MA.1 white
8601.D.700MA.2 black

built-up
max. 1kg
700mA / max. 33W

8601.M.D.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC



IP20



Led-track single spot mechanical adaptor + mounting nipple
M10x1
Led-track Einzelspot mechanischer Adapter +
Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide

Ref

8601.M.D.250MA.1

white

8601.M.D.250MA.2

black

1 | 2

built-up
max. 2kg
250mA / max. 12W

8601.M.D.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC



IP20



Led-track single spot mechanical adaptor + mounting nipple
M10x1
Led-track Einzelspot mechanischer Adapter +
Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide

Ref

8601.M.D.350MA.1

white

8601.M.D.350MA.2

black

1 | 2

built-up
max. 2kg
350mA / max. 16,5W

8601.M.D.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20    



Led-track single spot mechanical adaptor + mounting nipple
M10x1
Led-track Einzelspot mechanischer Adapter +
Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide

Ref

8601.M.D.500MA.1 white
8601.M.D.500MA.2 black

built-up
max. 2kg
500mA / max. 24W

8601.M.D.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | DALI

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple
M10x1
Led-track Einzelspot mechanischer Adapter +
Befestigungsrippel M10x1

Dimensions

↔ L166

Materials

polyamide

Ref

8601.M.D.700MA.1 white
8601.M.D.700MA.2 black

built-up
max. 2kg
700mA / max. 33W

8602.DS.250MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot adaptor + monting nipple M10x1
Led-track Doppelspot-Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.DS.250MA.1 white
8602.DS.250MA.2 black

built-up
max. 1kg
250mA / max. 12W

8602.DS.350MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot adaptor + monting nipple M10x1
Led-track Doppelspot-Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.DS.350MA.1 white
8602.DS.350MA.2 black

built-up
max. 1kg
350mA / max. 16,5W

8602.DS.500MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20    



Led-track double spot adaptor + monting nipple M10x1
Led-track Doppelspot-Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.DS.500MA.1 white
8602.DS.500MA.2 black

built-up
max. 1kg
500mA / max. 24W

8602.DS.700MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot adaptor + monting nipple M10x1
Led-track Doppelspot-Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.DS.700MA.1 white
8602.DS.700MA.2 black

built-up
max. 1kg
700mA / max. 33W

8602.M.DS.250MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot mechanical adaptor + mounting nipple M10x1
Led-track Doppelspot mechanischer Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.M.DS.250MA.1 white
8602.M.DS.250MA.2 black

built-up
max. 2kg
250mA / max. 12W

8602.M.DS.350MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot mechanical adaptor + mounting nipple M10x1
Led-track Doppelspot mechanischer Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.M.DS.350MA.1 white
8602.M.DS.350MA.2 black

built-up
max. 2kg
350mA / max. 16,5W

8602.M.DS.500MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot mechanical adaptor + mounting nipple M10x1
Led-track Doppelspot mechanischer Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.M.DS.500MA.1 white
8602.M.DS.500MA.2 black

built-up
max. 2kg
500mA / max. 24W

8602.M.DS.700MA/.. - LUCY DOUBLE SPOT ADAPTOR 48V | DALI IN SERIE

=48V-DC  IP20   



Led-track double spot mechanical adaptor + mounting nipple M10x1
Led-track Doppelspot mechanischer Adapter + Befestigungsniessel M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8602.M.DS.700MA.1 white
8602.M.DS.700MA.2 black

built-up
max. 2kg
700mA / max. 33W

8601.B.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V |BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.B.250MA.1 white
8601.B.250MA.2 black

built-up
max 1kg
250mA / max. 12W

8601.B.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V |BLUETOOTH CASAMBI

=48V-DC  IP20    



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.B.350MA.1 white
8601.B.350MA.2 black

built-up
max 1kg
350mA / max. 16,5W

8601.B.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V |BLUETOOTH CASAMBI

=48V-DC  IP20    



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.B.500MA.1 white
8601.B.500MA.2 black

built-up
max. 1kg
500mA / max. 24W

8601.B.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot adaptor + mounting nipple M10x1
Led-track Einzelspot-Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.B.700MA.1 white
8601.B.700MA.2 black

built-up
max. 1kg
700mA / max. 33W

8601.M.B.250MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.B.250MA.1 white
8601.M.B.250MA.2 black

built-up
max. 2kg
250mA / max. 12W

8601.M.B.350MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.B.350MA.1 white
8601.M.B.350MA.2 black

built-up
max. 2kg
350mA / max. 16,5W

8601.M.B.500MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.B.500MA.1 white
8601.M.B.500MA.2 black

built-up
max. 2kg
500mA / max. 24W

8601.M.B.700MA/.. - LUCY SINGLE SPOT ADAPTOR 48V | BLUETOOTH CASAMBI

=48V-DC  IP20   



Led-track single spot mechanical adaptor + mounting nipple M10x1
Led-track Einzelspot mechanischer Adapter + Befestigungsrippe M10x1

Dimensions

↔ L166

Materials

polyamide 1 | 2

Ref

8601.M.B.700MA.1 white
8601.M.B.700MA.2 black

built-up
max. 2kg
700mA / max. 33W

000T/.. - MONTAGE SPOT TRACK

IP00    0.0100 



accessories - assembly spot on adaptor
Zubehör - Montage Spot auf Adapter

Ref
000T

LUCY
TRACK LUMINAIRES

8480/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  5,6 



Opal lens - 286mm - with LED driver
Opallinse - 286mm - mit Driver LED

Ref
8480.2.NW black

Lamp type

1x LED 490lm CRI90 max. 6W 48V-DC

Dimensions

L286xB22,5xH43
Visible - L286xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8481/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  4,6 



Opal lens - 567mm - with LED driver
Opallinse - 567mm - mit Driver LED

Ref
8481.2.NW black

Lamp type

1x LED 1005lm CRI90 max. 11,9W 48V-DC

Dimensions

L567xB22,5xH43
Visible - L567xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8482/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  4,6 



Opal lens - 847mm - with LED driver
Opallinse - 847mm - mit Driver LED

Ref
8482.2.NW black

Lamp type

1x LED 1508lm CRI90 max. 17,8W 48V-DC

Dimensions

L847xB22,5xH43
Visible - L847xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8483/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  4,6 



Opal lens - 1128mm - with LED driver
Opallinse - 1128mm - mit Driver LED

Ref
8483.2.NW black

Lamp type

1x LED 2011lm CRI90 max. 23,8W 48V-DC

Dimensions

L1128xB22,5xH43
Visible - L1128xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8484/.. - LUCY TRACK

=48V-DC

IP20

0,5 m

4.6



Opal lens - 1408mm - with LED driver
Opallinse - 1408mm - mit Driver LED

Ref

8484.2.NW

black

Lamptype	
1x LED 2514lm CRI90 max. 29,8W	48V-DC
Dimensions	
L1408xB22,5xH43	
Visible - L1408xB22,5xH25	
Materials	
polyamide	2

built-up
DALI / 1-10V / Casambi / ON-OFF



8485/.. - LUCY TRACK

=48V-DC       



UGR lens - 286mm - with LED driver
UGR-Linse - 286mm - mit Driver LED

Ref
8485.2.NW black

Lamptype

1x LED 412lm CRI95 max. 5,2W 48V-DC

Dimensions

L286xB22,5xH43
Visible - L286xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8486/.. - LUCY TRACK

=48V-DC       



UGR lens - 567mm - with LED driver
UGR-Linse - 567mm - mit Driver LED

Ref
8486.2.NW black

Lamptype

1x LED 825lm CRI95 max. 9,9W 48V-DC

Dimensions

L567xB22,5xH43
Visible - L567xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8487/.. - LUCY TRACK

=48V-DC       



UGR lens - 847mm - with LED driver
UGR-Linse - 847mm - mit Driver LED

Ref
8487.2.NW black

Lamptype

1x LED 1236lm CRI95 max. 14,5W 48V-DC

Dimensions

L847xB22,5xH43
Visible - L847xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8488/.. - LUCY TRACK

=48V-DC       



UGR lens - 1128mm - with LED driver
UGR-Linse - 1128mm - mit Driver LED

Ref
8488.2.NW black

Lamptype

1x LED 1615lm CRI95 max. 19,8W 48V-DC

Dimensions

L1128xB22,5xH43
Visible - L1128xB22,5xH25

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8489/.. - LUCY TRACK

=48V-DC   IP20   0,1200  0,5 m  5,6 



directional - Adjustable UGR lens - 310mm - with LED driver
schwenkbar - Schwenkbare UGR-Linse - 310mm - mit Driver LED

Ref
8489.2.NW black

Lamptype

1x led 389lm CRI95 max. 5,2W 48V-DC

Dimensions

L286xB22,5xH68

Visible - L286xB22,5xH50

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8490/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  4,6 



directional - Adjustable UGR lens - 590mm - with LED driver
schwenkbar - Schwenkbare UGR-Linse - 590mm - mit Driver LED

Ref
8490.2.NW black

Lamptype

1x led 777lm CRI95 max. 9,9W 48V-DC

Dimensions

L590xB22,5xH68

Visible - L590xB22,5xH50

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8491/.. - LUCY TRACK

=48V-DC   IP20   0,5 m  4,6 



directional - Adjustable UGR lens - 870mm - with LED driver
schwenkbar - Schwenkbare UGR-Linse - 870mm - mit Driver LED

Ref
8491.2.NW black

Lamptype

1x led 1167lm CRI95 max. 14,5W 48V-DC

Dimensions

L870xB22,5xH68

Visible - L870xB22,5xH50

Materials

polyamide 2

built-up

DALI / 1-10V / Casambi / ON-OFF

8492/.. - LUCY TRACK

~230V



IP20



0,5 m



5,6



directional - Adjustable tube - 295mm - with LED driver
schwenkbar - Schwenkbares Rohr - 295mm - mit Driver LED

Ref

8492.2.NW

black

Lamp type

1x LED 546lm CRI90 max. 6,1W

48V-DC

Dimensions

L310xB30xH62

Visible - L310xB30xH44

Materials

polyamide

2

built-up

DALI / 1-10V / Casambi / ON-OFF

8493/.. - LUCY TRACK

~230V



IP20



0,5 m



4,6



directional - Adjustable tube - 575mm - with LED driver
schwenkbar - Schwenkbares Rohr - 575mm - mit Driver LED

Ref

8493.2.NW

black

Lamp type

1x LED 1091lm CRI90 max. 11,9W

48V-DC

Dimensions

L575xB30xH62

Visible - L575xB30xH44

Materials

polyamide

2

built-up

DALI / 1-10V / Casambi / ON-OFF



RSLP035-48/.. - TRANSFO

IP20 0,0700 5.14 CE



multi driver
Multi Driver

Dimensions

↔ L70xB52xH27

Ref cat (STD)
RSLP035-48

TR127310/.. - MULTI DRIVER

IP20 0,2400 5.14 CE



multi driver
Multi Driver

Dimensions

↔ L130xB76xH30

Ø90

Ref
TR127310

LPV6048/.. - TRANSFO

=24V-DC IP20 0,2000 5.14 CE



transformer
Trafo

Dimensions

↔ L170xB42xH32

Ref
LPV6048

24V-DC - parallel connection
Parallelschaltung

DRP12048/.. - TRANSFO

IP20 0,8100 5.14 CE



transformer
Trafo

Dimensions

↔ L125,2xB65,5xH100

Ref
DRP12048

36W-500mA / 50W-700mA / 50W-1A

HDR150-48/.. - TRANSFO DIN RAIL

=24V-DC  IP20  0,3500  5.14 



transformer
Trafo - 100W 24VDC

Dimensions

↔ L105xB90xH54,5

Ref
HDR150-48

24V-DC - parallel connection
Parallelschaltung

DRP24048/.. - TRANSFO

 IP20  0,8600  5.14 



transformer
Trafo

Dimensions

↔ L125,5xB125xH100

Ref
DRP24048

36W-500mA / 50W-700mA / 50W-1A

NDR240-48/.. - TRANSFO DIN RAIL

=24V-DC  IP20  0,9700  5.14 



transformer
Trafo

Dimensions

↔ L63xB125,2xH113,5

Ref
NDR240-48

24V-DC - parallel connection
Parallelschaltung

DRP48048/.. - TRANSFO

 IP20  0,9700  5.14 



transformer
Trafo

Dimensions

↔ L227xB125,2xH100

Ref
DRP48048

36W-500mA / 50W-700mA / 50W-1A

NDR480-48/.. - TRANSFO DIN RAIL

=24V-DC



IP20



0,5200



5,74



transformer
Trafo

Dimensions

↔ L85,5xB125,2xH128,5

Ref

NDR480-48

24V-DC - parallel connection
Parallelschaltung

Power supply (W)	A - Distance power supply / feed unit (2x1,5mm ²)			
	5m	10m	20m	30m
	B - Track lenght with $\Delta_v \leq 5,5\%$ (m)			
	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not admitted
200	40	30	Not admitted	Not admitted
250	35	20	Not admitted	Not admitted

Information refers to a load equivalent to the power supplied and equally distributed on the relevant lenght in the table.

CBU-TED/.. - CASAMBI

IP20  0,0500  5,14 



Trailing edge dimmer for incandescent lamps or dimmable LED lamps
Dimmer Phasenabschnitt für Glühlampe und dimmbare LED-Lampe

Ref
CBU-TED

Dimensions
L40,4xB36,3xH14

CBU-ASD/.. - CASAMBI

 IP20  0,1000  5,14 



Bluetooth controller for 0-10V, 1-10V, Dali, Dali Tunable White, Dali RGB and RGBW
Bluetooth controller für 0-10V, 1-10V, Dali, Dali Tunable White, Dali RGB und RGBW

Ref
CBU-ASD

Dimensions
L56,5xB35,8xH22,3

CBU-A2D/.. - CASAMBI

 IP20  0,0900  5,14 



Controller for one or two 0-10V LEDs or one tunable white LED with two 0-10V-interfaces. Also configurable in a DALI-modus.

Ansteuerung für ein oder zwei 0-10V LEDs oder ein tunable white LED mit zwei 0-10V-Interfaces. Auch konfigurierbar in DALI-Modus.

Ref
CBU-A2D

Dimensions
L76xB26xH23

X-PRESS/.. - CASAMBI



Wireless bluetooth interface - programmable at will
Drahtloser Schalter mit Bluetooth - nach Wunsch
programmierbar

Dimensions

↔ L90xB90xH12

Materials

aluminium

Ref

X-PRESS.1

white

X-PRESS.2

black

1 | 2

BLE-EWSSB/.. - CASAMBI



Kinetic switch - programmable at will
Kinetischer Schalter - programmierbar nach Wunsch

Dimensions

↔ L81xB81xH14

Ref

BLE-EWSSB

BLE-EWSDB/.. - CASAMBI



Kinetic switch - programmable at will
Kinetischer Schalter - programmierbar nach Wunsch

Dimensions

↔ L81xB81xH14

Ref

BLE-EWSDB

SC-TI-CAS/.. - CASAMBI

IP20   0,0400  5.14 



Input module for up to 4 potential-free buttons - wireless
Eingangsmodul für bis zu 4 potentialfreie Tasten - drahtlos

Ref
SC-TI-CAS

Dimensions
 Ø53xH21

LD220WCM/.. - CASAMBI

 IP20   0,0800  5.14 



Bluetooth dimmer with push button - appropriate for LED
lamps en LED dimmers
Bluetooth dimmer mit Drucktaste - geeignet für LED Lampen
und LED Dimmer

Ref
LD220WCM

Dimensions
 Ø56xH22

TR127630/.. - MULTI DRIVER push-CASAMBI

 IP20   0,0500  5.14 



multi driver
Multi Driver

Ref
TR127630

Dimensions
 L145xB42xH30



Groendreef 60 | 9880 Aalter | Belgium | T +32 9 374 19 51 | www.psmlighting.be