

+30
years
psmlighting

Mary

EASY CLICK rail systems



psmlighting


Delighted to help you



All information in this catalogue is without engagement.
Psmighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.
Read instructions carefully. The general psmighting sales conditions are always applicable.
Nothing in this catalogue can be reproduced without permission in writing from the psmighting bv company.

4802/.. - MARY 1FASE

~230V  IP20    

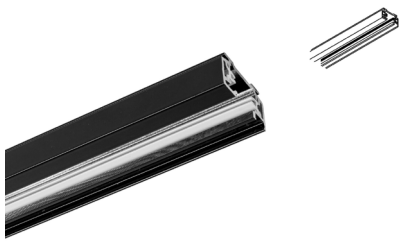



track - Track 2 meter for 1 circuit

Dimensions

↔ L2000xB35xH20

Materials


Aluminium 1 | 2

Ref	Price €
4802.1	
4802.2	

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4803/.. - MARY 1FASE

~230V  IP20    

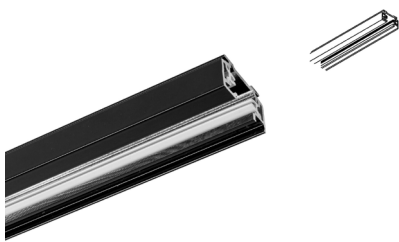



track - Track 3 meter for 1 circuit

Dimensions

↔ L3000xB35xH20

Materials


Aluminium 1 | 2

Ref	Price €
4803.1	
4803.2	

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4804/.. - MARY 1FASE

~230V  IP20    

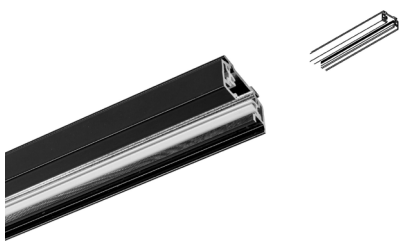

track - Track 4 meter for 1 circuit

Dimensions

↔ L4000xB35xH20

Materials




Aluminium 1 | 2

Ref	Price €
4804.1	
4804.2	

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

INDOOR | Ceiling UP | TRACK | MARY 1F

4811/.. - MARY 1FASE



~230V  IP20    



power supply for busbar system - End feed





Materials
Aluminium


1|2

Ref	Price €
4811.1	
4811.2	

built-up
Please attach drawing to the order!

4813/.. - MARY 1FASE



IP20    



accessories for track systems - End cap

Materials
Aluminium

1|2

Ref	Price €
4813.1	
4813.2	

built-up

4814/.. - MARY 1FASE



~230V  IP20    




Connection joinings - Straight coupler

Materials
Aluminium

1|2


Ref	Price €
4814.1	
4814.2	

built-up

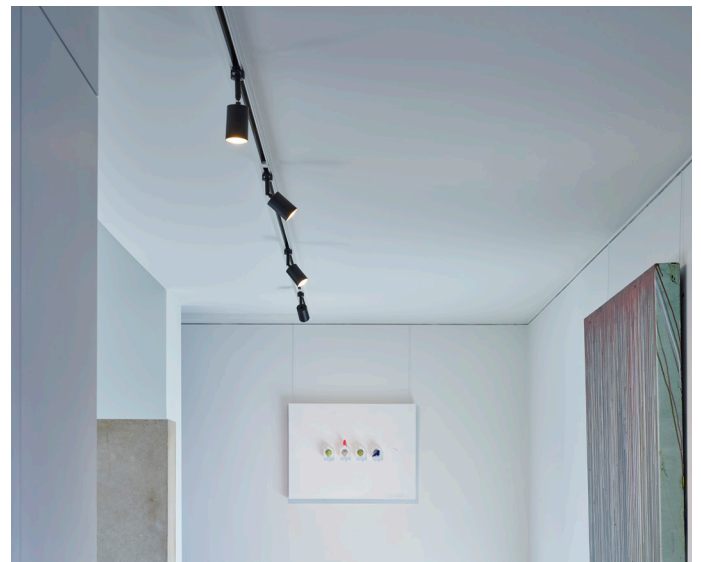

4807/.. - MARY 1FASE

~230V  IP20    



Connection joinings - I-connector with connection option for power supply

Ref



4807.1

Dimensions

↔ L107xB36xH23

Materials


Aluminium 1|2

Ref	Price €
4807.1	
4807.2	

built-up

4808/.. - MARY 1FASE

~230V  IP20    



Connection joinings - T-connector with connection option for power supply - grounding inside

Ref



4808.1

Dimensions

↔ L71xB71xH23

Materials



Aluminium 1|2

Ref	Price €
4808.1	
4808.2	

built-up
Please attach drawing to the order!

4810/.. - MARY 1FASE

~230V  IP20   



Connection joinings - X-connector with connection option for power supply

Ref



4810.1

Dimensions

↔ L78xB78xH23


Materials


Aluminium 1|2

Ref	Price €
4810.1	
4810.2	

built-up

4815/.. - MARY 1FASE

~230V  IP20    



Connection joinings - L-connector with connection option for power supply - grounding inside

Ref



4815.1

Dimensions

↔ L71xB71xH23

Materials

Aluminium 1|2

Ref	Price €
4815.1	
4815.2	

built-up
Please attach drawing to the order!

CEILING UP

TRACK

INDOOR | Ceiling UP | TRACK | MARY 1F

4816/.. - MARY 1FASE

~230V



IP20



Connection joinings - Flex-connector

Materials

Aluminium

Ref

4816.1

4816.2

1|2

Price €




built-up
from 60° to 300°

4817/.. - MARY 1FASE

~230V



IP20



Connection joinings - Y-connector with connection option for power supply

Dimensions

L78xB78xH23

Materials

Aluminium

Ref

4817.1

4817.2

1|2

Price €




built-up
Please attach drawing to the order!

4820/.. - MARY 1FASE

~230V



IP20

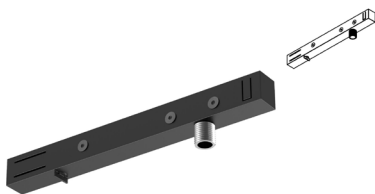

adapter - Multi-adaptor for 1 circuit track + retaining collar M10x1

Dimensions

L130

Materials

Aluminium

Ref

4820.1

4820.2

1|2

Price €



built-up



4805/.. - MARY 1FASE

~230V



IP20




1.5 m



accessories for track systems - Adaptor for suspension - steel cable 1,5m

Ref
4805

Price €



built-up

4806/.. - MARY 1FASE

~230V



IP20




3 m



accessories for track systems - Adaptor for suspension - steel cable 3m

Ref
4806

Price €



built-up

CEILING UP

TRACK



INDOOR | Ceiling UP | TRACK | MARY 1F

4820.7700/.. - MARY CAPA ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V
1x QPAR70 GU10 max. 8W 230V

Dimensions

↔ Ø32xH84 50

Head Ø32xH40

Materials

Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 23

Ref	Price €
4820.7700.1M	●
4820.7700.2M	●
4820.7700.14	●
4820.7700.11M	●
4820.7700.4	●
4820.7700.16	●
4820.7700.13	●
4820.7700.23	●

built-up

4820.7800/.. - MARY CAPA X ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

↔ Ø54xH140 Head Ø54xH85

Materials


Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 13M | 23

Ref	Price €
4820.7800.1M	●
4820.7800.2M	●
4820.7800.14	●
4820.7800.11M	●
4820.7800.4	●
4820.7800.16	●
4820.7800.13	●
4820.7800.13M	●
4820.7800.23	●

built-up

4820.7600/.. - MARY CAPA AC ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

↔ Ø58xH180 36°

Head Ø58xH130

Materials

Aluminium 1M | 2M | 14 | 45
Messing 4 | 16

Ref	Price €
4820.7600.1M	● CW NW WW
4820.7600.2M	● CW NW WW
4820.7600.14	● CW NW WW
4820.7600.4	● CW NW WW
4820.7600.16	● CW NW WW
4820.7600.45	● CW NW WW

built-up
dimmable leading and trailing edge

4820.1837/.. - MARY MERO ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 860lm CRI90 max. 10W 230V

Dimensions

↔ Ø80xH180 30°


Head Ø80xH120

Materials

Aluminium 1M | 2M

Ref	Price €
4820.1837.1M	● CW NW WW
4820.1837.2M	● CW NW WW

built-up
to combine with adaptor or on a profile

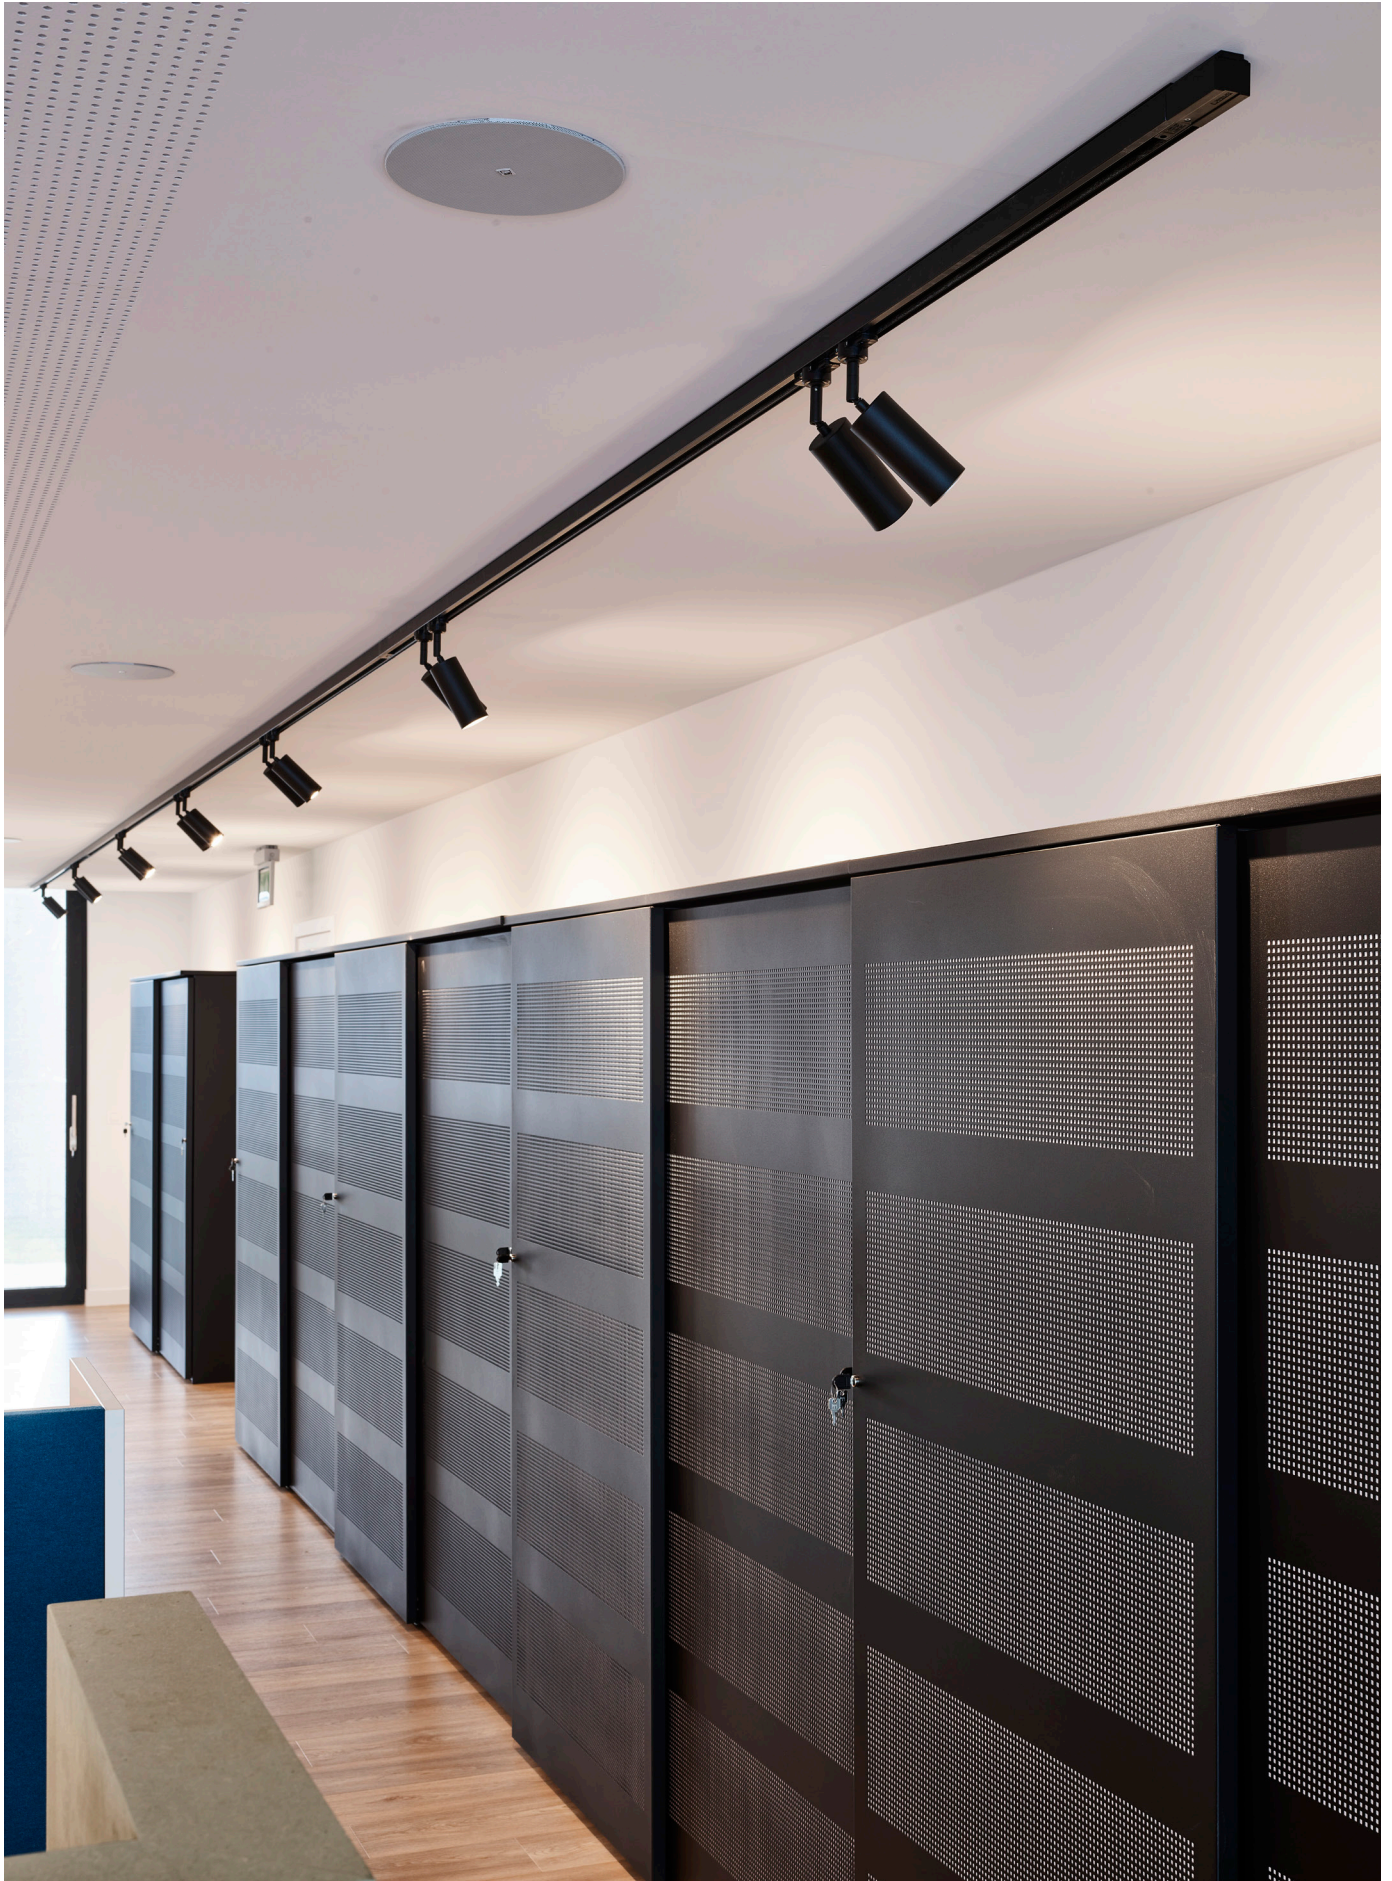

CEILING UP

TRACK

INDOOR | Ceiling UP | TRACK | MARY 1F

4820.7606/.. - MARY FIXER ADAPTOR

~230V



built-up spot with adaptor - square - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

↔ L60xB60xH150 Head L60xB60xH90

Materials

Aluminium 1M | 2M | 14 | 11M

Ref	Price €
4820.7606.1M	●
4820.7606.2M	●
4820.7606.11M	●
4820.7606.14	●

built-up

4820.7603/.. - MARY FIXER AC ADAPTOR

~230V



built-up spot with adaptor - square - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

↔ L60xB60xH185 \wedge 36°

Head L60xB60xH125

Materials

Aluminium 1M | 2M | 14 | 45

Ref	Price €
4820.7603.1M	● CW NW WW
4820.7603.2M	● CW NW WW
4820.7603.14	● CW NW WW
4820.7603.45	● CW NW WW

built-up
dimmable with leading and trailing edge dimmer

4820.3000/.. - MARY BABETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø80xH109 \wedge 28°

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16

Ref	Price €
4820.3000.1M	● NW WW
4820.3000.2M	● NW WW
4820.3000.49	● NW WW
4820.3000.29	● NW WW
4820.3000.16	● NW WW

built-up

4820.2730/.. - MARY SUZETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø70xH130 \wedge 30°


Head Ø70xH80

Materials

Aluminium 1M | 2M
Aluminium / Messing 216

Ref	Price €
4820.2730.1M	● NW WW
4820.2730.2M	● NW WW
4820.2730.216	● NW WW

built-up

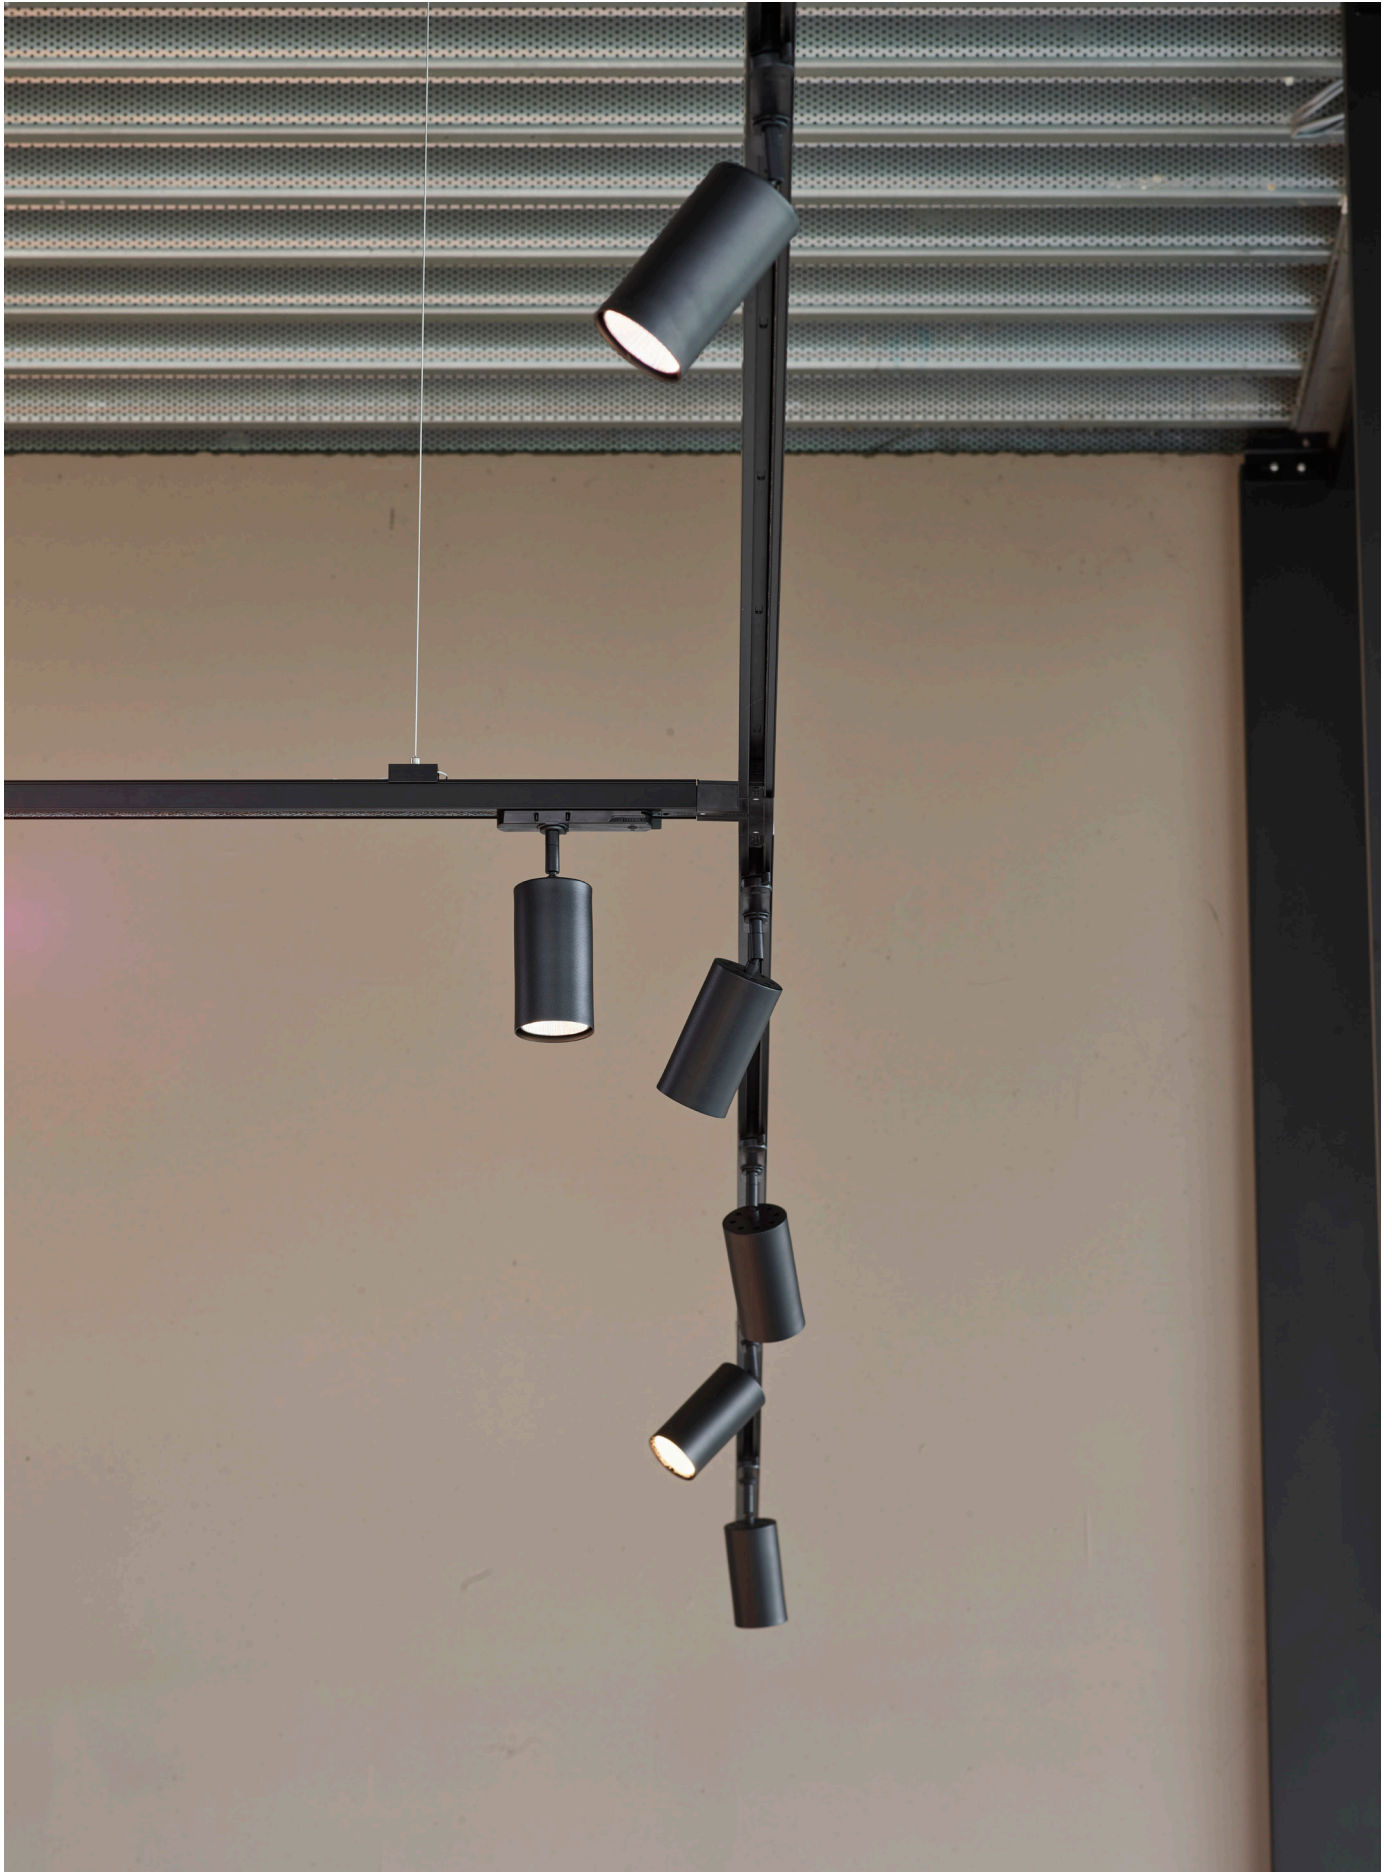

CEILING UP


TRACK

8110/.. - MARY 3FASE TRACK

~230V



IP20

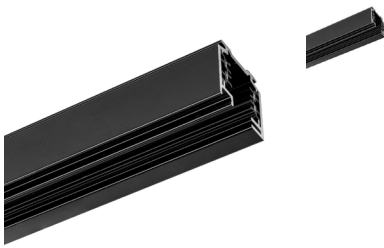

track - Track 2 meter for 3 circuits

Dimensions

↔ L2000

Materials

Aluminium 1|2

Ref **Price €**

8110.1 ●

8110.2 ●


built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

8111/.. - MARY 3FASE TRACK

~230V



IP20

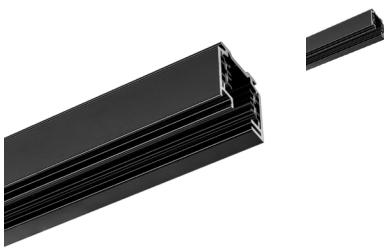

track - Track 3 meter for 3 circuits

Dimensions

↔ L3000

Materials

Aluminium 1|2

Ref **Price €**

8111.1 ●

8111.2 ●

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

8139/.. - MARY 3FASE TRACK

~230V



IP20



Track 4 meter for 3 circuits

Dimensions

↔ L4000

Materials

Aluminium 1|2

Ref **Price €**


8139.1 ●

8139.2 ●

built-up
extra transport cost - long profile

8112/.. - MARY 3FASE FEEDING

~230V  IP20    CE

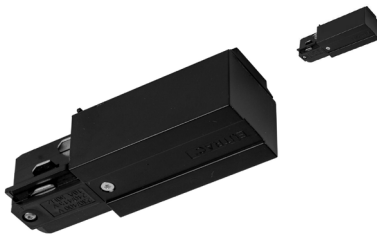



power supply for busbar system - End feed

Materials




Aluminium


1|2

Ref	Price €
8112.1	
8112.2	

built-up

8113/.. - MARY 3FASE TRACK

IP20    CE





accessories for track systems - End cap

Materials

Aluminium

1|2

Ref	Price €
8113.1	
8113.2	

built-up

8114/.. - MARY 3FASE TRACK

~230V  IP20    CE





Connection joinings - Straight coupler

Materials

Aluminium


1|2

Ref	Price €
8114.1	
8114.2	

built-up

8115/.. - MARY 3FASE ADAPTOR

~230V  IP20    CE

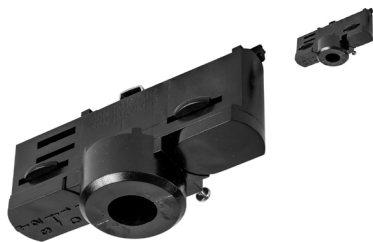



adapter - Multi-adaptor for 3 circuit track + retaining collar M10x1

Materials

Aluminium

1|2

Ref	Price €
8115.1	
8115.2	

built-up
max. 5kg

8120/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - I-connector with connection option for power supply

Dimensions

↔ L120

Materials

Aluminium 1|2

Ref **Price €**

8120.1 ●

8120.2 ●

built-up

8121/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - L-connector with connection option for power supply - grounding outside

Dimensions

↔ L78xB78xH23

Materials

Aluminium 1|2

Ref **Price €**

8121.1 ●

8121.2 ●

built-up

Please attach drawing to the order!

8122/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - L-connector with connection option for power supply - grounding inside

Dimensions

↔ L78xB78xH23

Materials

Aluminium 1|2

Ref **Price €**

8122.1 ●


8122.2 ●

built-up

Please attach drawing to the order!

8123/.. - MARY 3FASE TRACK

IP20



I-connector with connection option for power supply

Materials

Aluminium 1|2

Ref **Price €**

8123.1 ●

8123.2 ●



CEILING UP

TRACK

8125/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - T-connector with connection option for power supply - grounding outside

Dimensions

↔ L78xB78xH

Materials

Aluminium 1|2

Ref	Price €
8125.1	●
8125.2	●

built-up
Please attach drawing to the order!

8126/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - T-connector with connection option for power supply - grounding inside

Dimensions

↔ L78xB78xH

Materials

Aluminium 1|2

Ref	Price €
8126.1	●
8126.2	●

built-up
Please attach drawing to the order!



8140/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Hanging clip for 3-phase track suspension

Ref

Price €

8140.1



Dimensions

8140.2



↔ L50xB35xH20

Materials

Aluminium

1 | 2

built-up

8141/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Hanging clip for 3-phase track connector suspension

Ref

Price €

8141.1



Dimensions

8141.2



↔ L100xB35xH20

Materials

Aluminium

1 | 2

built-up

8142/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Steel suspension cable 3 meters for 3-phase track

Ref

Price €

8142

Dimensions

Cable 3000

Cable L3000

Materials

Aluminium

built-up

8143/.. - MARY 3FASE TRACK

~230V



IP20



Connection joinings - Steel suspension cable 6,2 meters for 3-phase track

Ref

Price €

8143

Dimensions

Cable 6200

Cable L6200

Materials

Aluminium

built-up

8127.250/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 12W | 250mA | not dimmable | 10-42V

Dimensions

158X31

Materials

Aluminium 1|2

Ref **Price €**

8127.250.1

8127.250.2

8127.350/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 16W | 350mA | not dimmable | 10-42V

Dimensions

158X31

Materials

Aluminium 1|2

Ref **Price €**

8127.350.1

8127.350.2

8127.500/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V

Dimensions

158X31

Materials

Aluminium 1|2

Ref **Price €**

8127.500.1

8127.500.2

8127.700/.. - MARY 3FASE MULTI ADAPTOR LED



adapter - Combined In-Track Adapter | max. 33W | 750mA | not dimmable | 10-42V

Dimensions

158X31

Materials

Aluminium 1|2

Ref **Price €**

8127.700.1

8127.700.2



CEILING UP

TRACK



8115.7700/.. - MARY CAPA ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V
1x QPAR70 GU10 max. 8W 230V

Dimensions

↔ Ø32xH84 50

Head Ø32xH40

Materials

Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 23

Ref

8115.7700.1M
8115.7700.2M
8115.7700.14
8115.7700.11M
8115.7700.4
8115.7700.16
8115.7700.13
8115.7700.23


Price €



built-up

8115.7800/.. - MARY CAPA X ADAPTOR

~230V



built-up spot with adaptor - round - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

↔ Ø54xH140 Head Ø54xH85

Materials

Aluminium 1M | 2M | 14 | 11M
Messing 4 | 16 | 13 | 13M | 23

Ref

8115.7800.1M
8115.7800.2M
8115.7800.14
8115.7800.11M
8115.7800.4
8115.7800.16
8115.7800.13
8115.7800.13M
8115.7800.23

Price €



built-up

8115.7600/.. - MARY CAPA AC ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

↔ Ø58xH180 ∠ 36°

Head Ø58xH130

Materials

Aluminium 1M | 2M | 14 | 45
Messing 4 | 16

Ref

8115.7600.1M
8115.7600.2M
8115.7600.14
8115.7600.4
8115.7600.16
8115.7600.45

Price €



built-up
dimmable leading and trailing edge

8115.1837/.. - MARY MERO ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 860lm CRI90 max. 10W 230V

Dimensions

↔ Ø80xH180 ∠ 30°

Head Ø80xH120

Materials

Aluminium 1M | 2M

Ref

8115.1837.1M
8115.1837.2M

Price €



built-up
to combine with adaptor or on a profile

INDOOR | Ceiling UP | TRACK | MARY 3F

8115.7606/.. - MARY FIXER ADAPTOR

~230V



built-up spot with adaptor - square - directional - without LED lamp

Lamptype

1x QPAR 51 GU10 max. 20W 230V

Dimensions

↔ L60xB60xH150 Head L60xB60xH90

Materials


Aluminium 1M | 2M | 14 | 11M

Ref	Price €
8115.7606.1M	●
8115.7606.2M	●
8115.7606.11M	●
8115.7606.14	●

built-up

8115.7603/.. - MARY FIXER AC ADAPTOR

~230V



built-up spot with adaptor - square - directional - with LED module

Lamptype

1x LED 700lm CRI92 max. 9,5W 230V

Dimensions

↔ L60xB60xH185 ∠ 36°

Head L60xB60xH125

Materials


Aluminium 1M | 2M | 14 | 45

Ref	Price €
8115.7603.1M	● CW NW WW
8115.7603.2M	● CW NW WW
8115.7603.14	● CW NW WW
8115.7603.45	● CW NW WW

built-up
dimmable with leading and trailing edge dimmer

8115.3000/.. - MARY BABETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø80xH109 ∠ 28°

Materials


Aluminium 1M | 2M | 29 | 49
Messing 16

Ref	Price €
8115.3000.1M	● NW WW
8115.3000.2M	● NW WW
8115.3000.16	● NW WW
8115.3000.29	● NW WW
8115.3000.49	● NW WW

built-up

8115.2730/.. - MARY SUZETTE ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED module

Lamptype

1x LED 350lm CRI90 max. 4W 230V

Dimensions

↔ Ø70xH130 ∠ 30°

Head Ø70xH80

Materials

Aluminium 1M | 2M
Aluminium / Messing 216

Ref	Price €
8115.2730.1M	● NW WW
8115.2730.2M	● NW WW
8115.2730.216	● NW WW

built-up



CEILING UP

TRACK



8127.7870/.. - MARY PETRUS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Ref **Price €**

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

8127.7870.1M	● NW WW
8127.7870.2M	● NW WW
8127.7870.16	● NW WW
8127.7870.13M	● NW WW
8127.7870.29	● NW WW
8127.7870.49	● NW WW

Dimensions

↔ Ø60xH180 ∧ 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16 | 13M

*built-up
to combine with adaptor or on a profile*

8127.7871/.. - MARY LUCAS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Ref **Price €**

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

8127.7871.1M	● NW WW
8127.7871.2M	● NW WW
8127.7871.16	● NW WW
8127.7871.13M	● NW WW

Dimensions

↔ Ø60xH180 ∧ 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

*built-up
to combine with adaptor or on a profile*

8127.7872/.. - MARY MARCUS 3FASE

~230V



built-up spot with adaptor - round - directional - Combined In-Track Adapter | max. 23W | 500mA | not dimmable | 10-42V - with LED driver

Ref **Price €**

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

8127.7872.1M	● NW WW
8127.7872.2M	● NW WW
8127.7872.16	● NW WW
8127.7872.13M	● NW WW

Dimensions

↔ Ø60xH180 ∧ 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M


*built-up
to combine with adaptor or on a profile*



4901/.. - MARY 3FASE DALI INSIDE

~230V

IP20

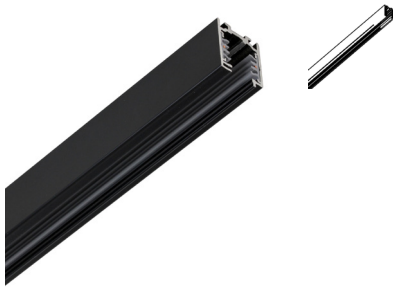

track

Dimensions

↔ L1000xB31,4xH

Materials

Aluminium

1 | 2

Ref

4901.1

4901.2




Price €

You can shorten the rail yourself by sawing

4902/.. - MARY 3FASE DALI INSIDE

~230V

IP20

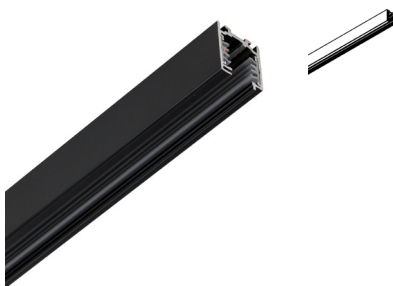

track

Dimensions

↔ L2000xB31,4xH

Materials

Aluminium

1 | 2

Ref

4902.1

4902.2




Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4903/.. - MARY 3FASE DALI INSIDE

~230V

IP20

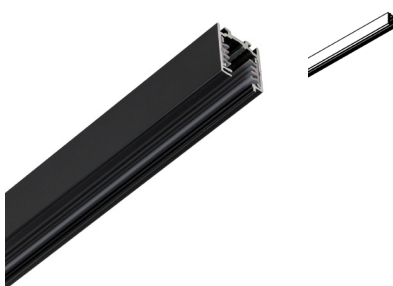

track

Dimensions

↔ L3000xB31,4xH

Materials

Aluminium

1 | 2

Ref

4903.1

4903.2




Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

4904/.. - MARY 3FASE DALI INSIDE

~230V

IP20

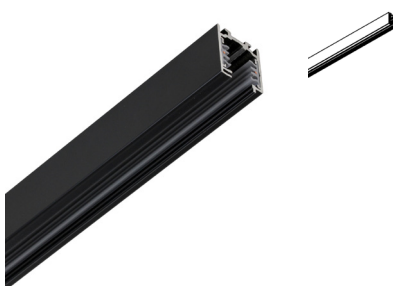

track

Dimensions

↔ L4000xB31,4xH

Materials

Aluminium

1 | 2

Ref

4904.1

4904.2








Price €

built-up
extra transport cost - long profile - You can shorten the rail yourself by sawing

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4913/.. - MARY 3FASE DALI INSIDE

IP20    



accessories for track systems - End cap

Dimensions

↔ L37,8xB31,4

Materials

Aluminium

Ref

4913.1

4913.2

Price €




1|2

built-up

4908/.. - MARY 3FASE DALI INSIDE

IP20  



accessories for track systems - Ceiling clip black

Dimensions

↔ L40xB24,3xH13,5

Materials

Aluminium

Ref

4908.2


Price €



2

4909/.. - MARY 3FASE DALI INSIDE

IP20  



accessories for track systems - Ceiling clip alu

Dimensions

↔ L40xB21,8xH15,7

Materials

Aluminium

Ref

4909

Price €



4905/.. - MARY 3FASE DALI INSIDE

~230V



IP20



adapter - In-track adapter on/off

Dimensions

↔ L90xB32

Materials

Aluminium

Ref

4905.1

4905.2



Price €

1|2

4915/.. - MARY 3FASE DALI INSIDE

~230V



IP20



adapter - In-track adapter on/off with DALI contact

Dimensions

↔ L180

Materials

Aluminium

Ref

4915.1

4915.2




Price €

1|2

CEILING UP

TRACK

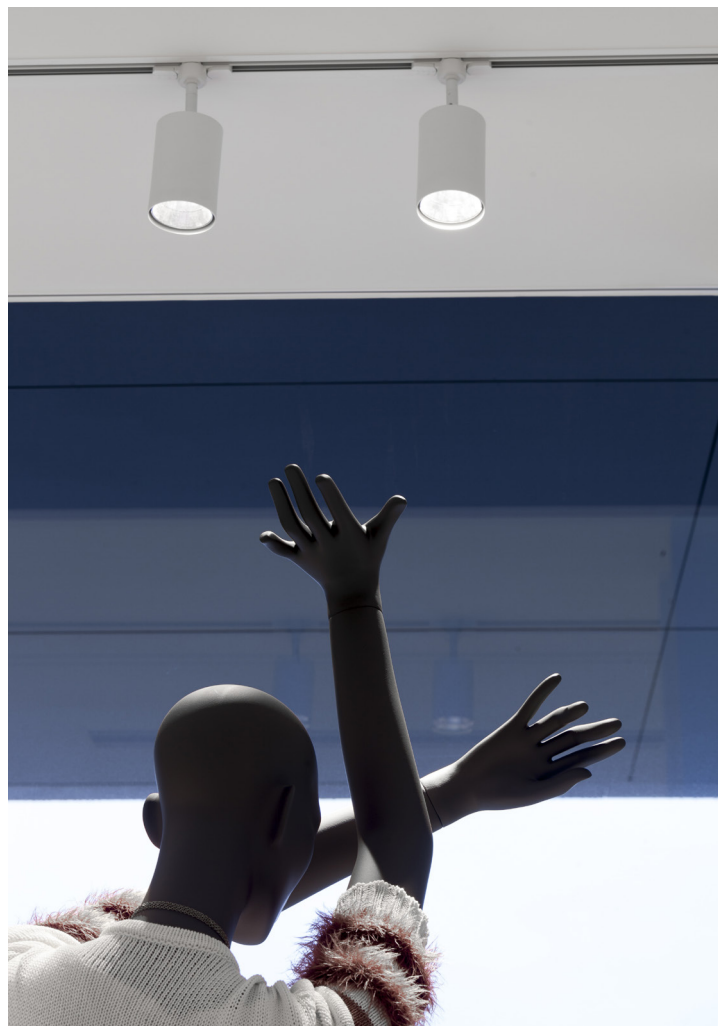

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4930.350/.. - MARY 3FASE DALI INSIDE

IP20  





adapter - In-track adapter max. 14,7W 350mA DALI - voltage 5-42 VDC

Dimensions

↔ L350

Materials

Aluminium 1|2

Ref	Price €
4930.350.1	
4930.350.2	

4930.500/.. - MARY 3FASE DALI INSIDE

IP20  





adapter - In-track adapter max. 21W 500mA DALI - voltage 5-42 VDC

Dimensions

↔ L350

Materials

Aluminium 1|2

Ref	Price €
4930.500.1	
4930.500.2	



4931.250/.. - MARY 3FASE DALI INSIDE

IP20  





adapter - In-track adapter max. 10,7W 250mA on/off - voltage 5-43 VDC

Dimensions

↔ L320

Materials

Aluminium 1 | 2

Ref	Price €
4931.250.1	
4931.250.2	

4931.350/.. - MARY 3FASE DALI INSIDE

IP20   





adapter - In-track adapter max. 15W 350mA on/off - voltage 5-43 VDC

Dimensions

↔ L320

Materials

Aluminium 1 | 2

Ref	Price €
4931.350.1	
4931.350.2	

4931.500/.. - MARY 3FASE DALI INSIDE

IP20  





adapter - In-track adapter max. 21W 500mA on/off - voltage 5-43 VDC

Dimensions

↔ L320

Materials

Aluminium 1 | 2

Ref	Price €
4931.500.1	
4931.500.2	

4932.350/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 15W 350mA DALI - voltage 5-42 VDC

Dimensions

↔ L250

Materials

Aluminium 1 | 2

Ref **Price €**

4932.350.1 

4932.350.2 

4932.500/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 21W 500mA DALI - voltage 5-42 VDC

Dimensions

↔ L250

Materials

Aluminium 1 | 2

Ref **Price €**

4932.500.1 

4932.500.2 

4932.700/.. - MARY 3FASE DALI UPSIDE

IP20  



adapter - In-track adapter max. 30W 700mA DALI

Dimensions

↔ L250

Materials




Aluminium 1 | 2

Ref **Price €**

4932.700.1 

4932.700.2 

4911/.. - MARY 3FASE DALI INSIDE

IP20   



power supply for busbar system - End feed right

Dimensions

↔ L95

Materials

Aluminium

Ref

4911.1

4911.2

Price €



1|2

4912/.. - MARY 3FASE DALI INSIDE

IP20   



power supply for busbar system - End feed left

Dimensions

↔ L95

Materials

Aluminium

Ref

4912.1

4912.2

Price €






1|2





4914/.. - MARY 3FASE DALI INSIDE

IP20   CE




Connection joinings - Straight coupler



Materials	Ref	Price €
Aluminium	4914.1	
	4914.2	

4919/.. - MARY 3FASE DALI INSIDE

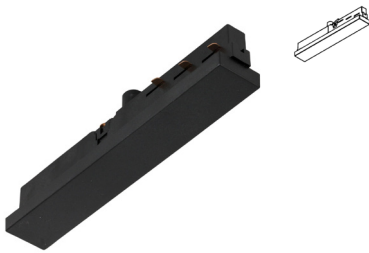IP20  CE




power supply for busbar system - Midfeed



Dimensions	Ref	Price €
↔ L203	4919.1	
	4919.2	
Materials		
Aluminium	1 2	

4907/.. - MARY 3FASE DALI INSIDE

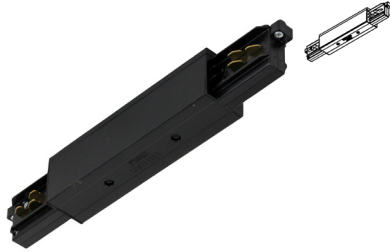IP20  CE



Connection joinings - I-connector with connection option for power supply

Dimensions	Ref	Price €
↔ L148	4907.1	
	4907.2	
Materials		
Aluminium	1 2	

CEILING UP

TRACK

4921/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - L-connector with connection option for power supply - grounding outside

Dimensions

↔ L89,7xB89,7

Materials

Aluminium 1 | 2

Ref	Price €
4921.1	
4921.2	

4922/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - L-connector with connection option for power supply - grounding inside

Dimensions

↔ L89,7xB89,7

Materials

Aluminium 1 | 2

Ref	Price €
4922.1	
4922.2	



4925/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - T-connector with connection option for power supply - grounding inside right

Dimensions

↔ L148xB78

Materials

Aluminium 1|2

Ref	Price €
4925.1	
4925.2	

4926/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - T-connector with connection option for power supply - grounding inside left

Dimensions

↔ L148xB78

Materials

Aluminium 1|2

Ref	Price €
4926.1	
4926.2	

4927/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - T-connector with connection option for power supply - grounding outside right

Dimensions

↔ L148xB78

Materials

Aluminium 1|2

Ref	Price €
4927.1	
4927.2	

4928/.. - MARY 3FASE DALI INSIDE

IP20  





Connection joinings - T-connector with connection option for power supply - grounding outside left

Dimensions

↔ L148xB78

Materials

Aluminium 1|2


Ref	Price €
4928.1	
4928.2	

CEILING UP

TRACK

4910/.. - MARY 3FASE DALI INSIDE

IP20  

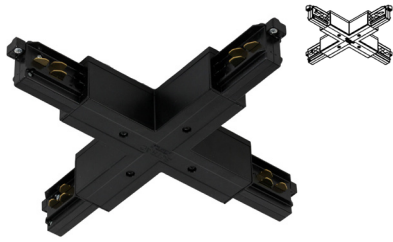

Connection joinings - X-connector with connection option for power supply

Ref **Price €**

4910.1 ●

Dimensions

4910.2 ●


↔ L148xB78

Materials

Aluminium 1|2

4916/.. - MARY 3FASE DALI INSIDE

IP20  



Connection joinings - Flex-connector

Ref **Price €**

4916.1 ●

Dimensions

4916.2 ●

↔ L265

Materials

Aluminium 1|2



4930.7870/.. - MARY PETRUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamp type

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

Ø60xH180 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16 | 13M

Ref

4930.7870.1M	● NW WW
4930.7870.2M	● NW WW
4930.7870.16	● NW WW
4930.7870.13M	● NW WW
4930.7870.29	● NW WW
4930.7870.49	● NW WW

Price €

built-up
to combine with adaptor or on a profile

4930.7871/.. - MARY LUCAS 3 FASE DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamp type

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

Ø60xH180 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4930.7871.1M	● NW WW
4930.7871.2M	● NW WW
4930.7871.16	● NW WW
4930.7871.13M	● NW WW

Price €

built-up
to combine with adaptor or on a profile

4930.7872/.. - MARY MARCUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamp type

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

Ø60xH180 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4930.7872.1M	● NW WW
4930.7872.2M	● NW WW
4930.7872.16	● NW WW
4930.7872.13M	● NW WW

Price €

built-up
to combine with adaptor or on a profile

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4931.7870/.. - MARY PETRUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16 | 13M

Ref

4931.7870.1M
4931.7870.2M
4931.7870.16
4931.7870.13M
4931.7870.29
4931.7870.49

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile

4931.7871/.. - MARY LUCAS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4931.7871.1M
4931.7871.2M
4931.7871.16
4931.7871.13M

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile

4931.7872/.. - MARY MARCUS 3F DALI INSIDE

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4931.7872.1M
4931.7872.2M
4931.7872.16
4931.7872.13M

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile



CEILING UP

TRACK

INDOOR | Ceiling UP | TRACK | MARY 3F DALI INSIDE

4932.7870/.. - MARY PETRUS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 690lm CRI97 max. 6,2W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M | 29 | 49
Messing 16 | 13M

Ref

4932.7870.1M
4932.7870.2M
4932.7870.16
4932.7870.13M
4932.7870.29
4932.7870.49

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile

4932.7871/.. - MARY PETRUS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4932.7871.1M
4932.7871.2M
4932.7871.16
4932.7871.13M

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile

4932.7872/.. - MARY PETRUS 3F DALI INLINE BUILT IN ADAPTOR

~230V



built-up spot with adaptor - round - directional - with LED driver

Lamptype

1x LED 952lm CRI97 max. 8,7W 500mA

Dimensions

→ Ø60xH180 \wedge 40°

Head Ø60xH130

Materials

Aluminium 1M | 2M
Messing 16 | 13M

Ref

4932.7872.1M
4932.7872.2M
4932.7872.16
4932.7872.13M

Price €

● NW | WW
● NW | WW
● NW | WW
● NW | WW

built-up
to combine with adaptor or on a profile

Coulours



Andere kleuren op aanvraag - Autres couleurs sur demande - Andere Farben auf Anfrage
Other colours on request

CEILING UP

TRACK





Groendreef 60, 9880 Aalter | T +32 9 374 19 51 | www.psmlighting.be

All our products are locally made in Aalter, Belgium (EU). Short delivery times.