



Myla 48V

Easy click track system



psmighting

Delighted to help you



All information in this catalogue is without engagement.

Psmlighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.

Read instructions carefully. The general psmlighting sales conditions are always applicable.

Nothing in this catalogue can be reproduced without permission in writing from the psmlighting bv company.

Tracks



Myla track

8501 - 1m
8502 - 2m
8503 - 3m



Myla in track

8509 - 1m
8510 - 2m
8511 - 3m



Myla in track

8551 - 1m
8552 - 2m
8553 - 3m



Myla curve track

8512 - 300mm - 90°
8513 - 500mm - 90°



Myla adapter

Power supply (W)	A - Distance power supply / feed unit (2x1,5mm ²)			
	5m	10m	20m	30m
	B - Track lenght with $\Delta_v \leq 5,5\%$ (m)			
	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not admitted
200	40	30	Not admitted	Not admitted
250	35	20	Not admitted	Not admitted


Information refers to a load equivalent to the power supplied and equally distributed on the relevant lenght in the table.

8501/.. - MYLA TRACK

=48V-DC



IP20

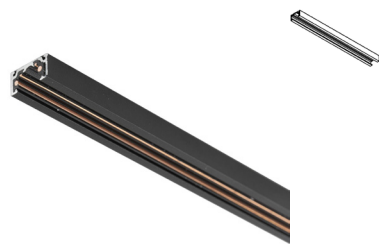

track - Track 1 meter for 1 circuit + data bus

Dimensions

↔ L1000xB19xH10,2

Materials

Aluminium

1 | 2

Ref Price €

8501.1



8501.2



built-up


You can shorten the rail yourself by sawing

8502/.. - MYLA TRACK

=48V-DC



IP20

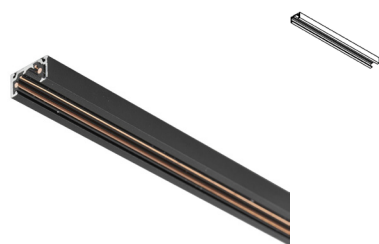

track - Track 2 meter for 1 circuit + data bus

Dimensions

↔ L2000xB19xH10,2

Materials

Aluminium

1 | 2

Ref Price €

8502.1



8502.2



built-up


extra transport cost - long profile - You can shorten the rail yourself by sawing

8503/.. - MYLA TRACK

=48V-DC



IP20

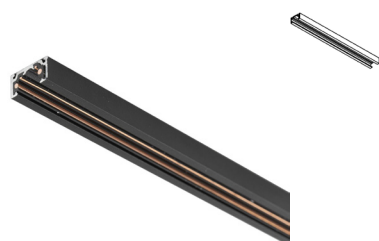

track - Track 3 meter for 1 circuit + data bus

Dimensions

↔ L3000xB19xH10,2

Materials

Aluminium

1 | 2

Ref Price €

8503.1




8503.2



built-up

extra transport cost - long profile - You can shorten the rail yourself by sawing

8505/.. - MYLA TRACK



accessories for track systems - End cap

Dimensions

↔ L19xB10,2xD8

Materials

Polyamide

1 | 2

Ref Price €

8505.1



8505.2



built-up

8512/.. - MYLA CURVE TRACK

=48V-DC  IP20  



track - Curved micro track - 300mm - 90° for 1 circuit + data bus

Dimensions

↔ L374,5xB374,5xH10,2

Materials


Aluminium 1 | 2

Ref	Price €
8512.1	
8512.2	

built-up
max. 10A - You can shorten the rail yourself by sawing

8513/.. - MYLA CURVE TRACK

~230V  IP20  

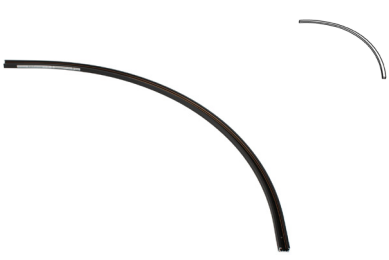

track - Curved micro track - 500mm - 90° for 1 circuit + data bus

Dimensions


↔ L574,5xB574,5xH10,2

Materials

Aluminium 1 | 2

Ref	Price €
8513.1	
8513.2	

built-up
max. 10A - You can shorten the rail yourself by sawing

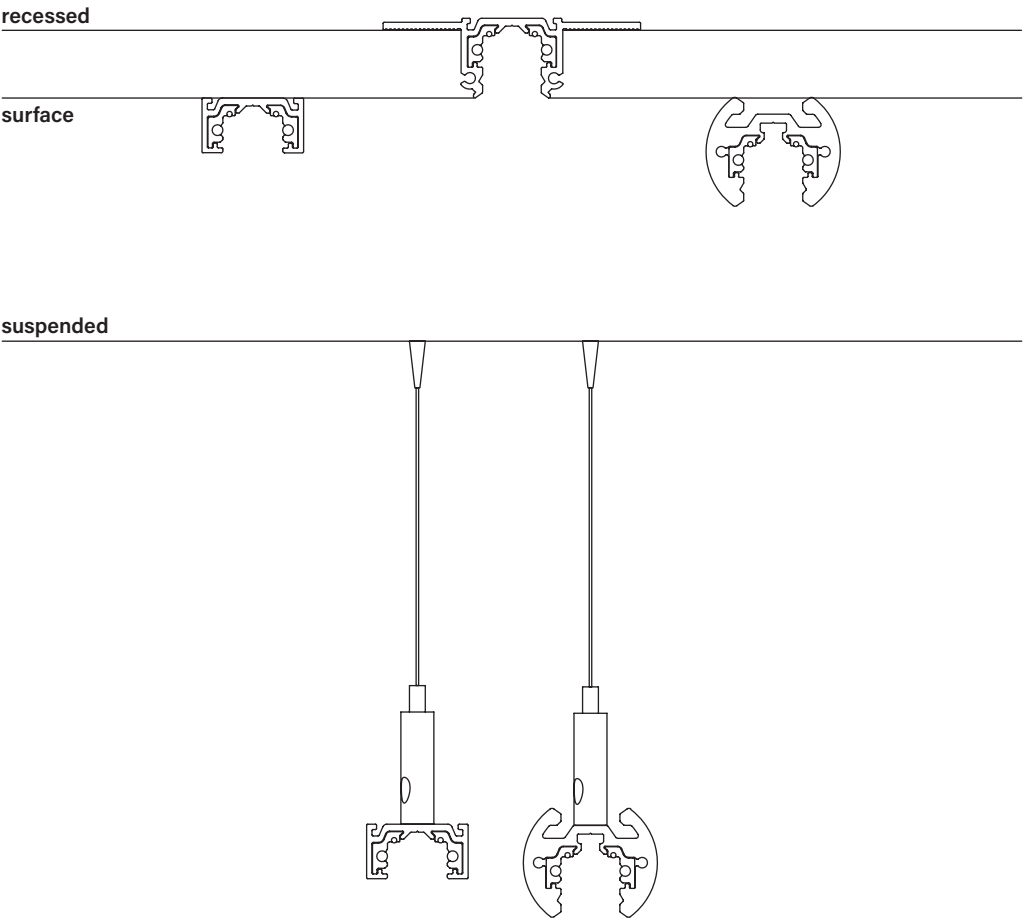

8551/.. - MYLA O TRACK

=48V-DC



IP20



track - Track 1 meter for 1 circuit + data bus

Dimensions

→ Ø26xL1000

Materials

Aluminium

1 | 2

Ref Price €

8551.1



8551.2



built-up

You can shorten the rail yourself by sawing

8552/.. - MYLA O TRACK

=48V-DC



IP20



track - Track 2 meter for 1 circuit + data bus

Dimensions

→ Ø26xL2000

Materials

Aluminium

1 | 2

Ref Price €

8552.1



8552.2



built-up

extra transport cost - long profile - You can shorten the rail yourself by sawing

8553/.. - MYLA O TRACK

=48V-DC



IP20



track - Track 3 meter for 1 circuit + data bus

Dimensions

→ Ø26xL3000

Materials

Aluminium

1 | 2

Ref Price €

8553.1




8553.2



built-up

extra transport cost - long profile - You can shorten the rail yourself by sawing

8555/.. - MYLA O TRACK



accessories for track systems - End cap

Dimensions

→ L26xB20,7xH8,6

Materials

Polyamide

1 | 2

Ref Price €

8555.1



8555.2



built-up




8509/.. - MYLA IN TRACK

=48V-DC



IP20

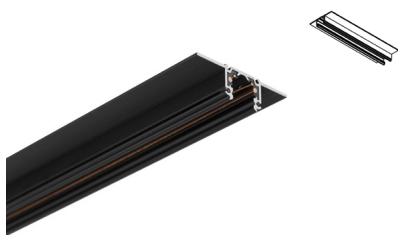

track - Track 1 meter for 1 circuit + data bus

Dimensions

→ L1000xB19,4xH15,1

↘ 19,4 x LENGTH

└┘ L 50

Materials

Aluminium

2

Ref

8509.2

Price €

built-up


You can shorten the rail yourself by sawing

8510/.. - MYLA IN TRACK

=48V-DC



IP20

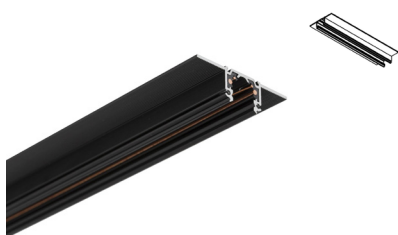

track - Track 2 meter for 1 circuit + data bus

Dimensions

→ L2000xB19,4xH15,1

↘ 19,4 x LENGTH

└┘ L 50

Materials

Aluminium

2

Ref

8510.2

Price €

built-up


extra transport cost - long profile - You can shorten the rail yourself by sawing

8511/.. - MYLA IN TRACK

=48V-DC



IP20

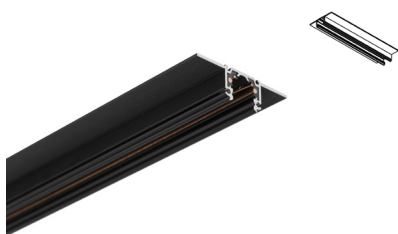

track - square - Track 3 meter for 1 circuit + data bus

Dimensions

→ L3000xB19,4xH15,1

↘ 19,4 x LENGTH

└┘ L 50

Materials

Aluminium

2

Ref

8511.2

Price €

built-up

extra transport cost - long profile - You can shorten the rail yourself by sawing

8506/.. - MYLA IN TRACK



accessories for track systems - End cap

Dimensions

→ L20,4xB14,3xH3,3

Materials

Polyamide

2

Ref

8506.2

Price €

built-up





CEILING UP

TRACK



8525/.. - MYLA TRACK



accessories for track systems - Cover strip 3m - opal

Ref 8525.1 Price €

Dimensions


↔ L3000xB13,5xH4,7

Materials

Aluminium 1

built-up
extra transport cost - long profile

8526/.. - MYLA TRACK



accessories for track systems - Cover strip 3m - black

Ref 8526.2 Price €

Dimensions


↔ L3000xB13,5xH4,7

Materials

Polyamide 2

built-up
extra transport cost - long profile

8516/.. - MYLA TRACK



accessories for track systems - Pendant set with steel cable m

Ref 8516 Price €

Dimensions

↔ Ø9xH9,3

built-up

8520/.. - MYLA TRACK

=48V-DC  IP20    

power supply for busbar system - End feed for 1 circuit + data bus

Ref Price €

8520.1 

8520.2 

Dimensions

↔ L140,5xB19xH10,2 Visible L71xB19xH10,2

Materials

Polyamide 1 | 2



built-up
Even with profile
max. 10A

8521/.. - MYLA TRACK

=48V-DC  IP20    

power supply for busbar system - End feed recessed with 2,5m cable

Ref Price €

8521.1 

8521.2 

Dimensions

↔ L116,1xBxH11,7

Materials

Polyamide 1 | 2



built-up
not completely even with profile
max. 10A

CEILING UP

TRACK



8522/.. - MYLA TRACK

=48V-DC



IP20



accessories for track systems - Jointing connector for 1 circuit + data

Ref

Price €

8522.1



8522.2



Dimensions

↔ L112,5xB6,9

Materials

Polyamide 1 | 2



built-up

8523/.. - MYLA TRACK

=48V-DC



IP20



accessories for track systems - L-connector for 1 circuit + data

Ref

Price €

8523.1



8523.2



Dimensions

↔ L86,7xB86,7xH6,9

Materials

Polyamide 1 | 2



built-up

8524/.. - MYLA TRACK WALL

=48V-DC



IP20



accessories for track systems - L-connector ceiling-wall for 1 circuit + data

Ref

Price €

8524.1



8524.2



Dimensions

↔ L86,7xB6,9xH86,7

Materials

Polyamide 1 | 2



built-up

8540/.. - MYLA TRACK

=48V-DC



IP20



Connection joinings - Flexible corner connector for 1 circuit + data

Ref

Price €

8540.1



8540.2



Dimensions

↔ L238xBxH11,7

Materials


Polyamide 1 | 2



built-up

8530/.. - MYLA TRACK

IP20  

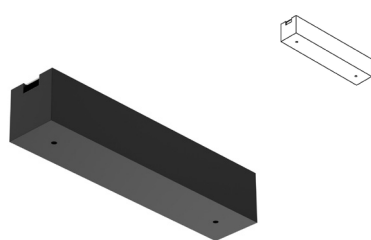

accessories for track systems - Box for track with transfo 48V-DC 60W - with 1 entry for square profile

Dimensions

↔ L250xB50xH50


Materials

Aluminium 1M | 2M

Ref	Price €
8530.1M	
8530.2M	

8531/.. - MYLA TRACK

IP20  

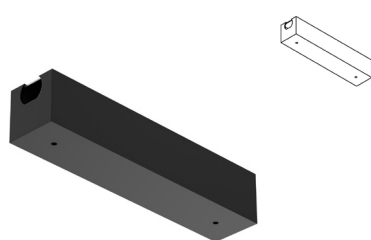

accessories for track systems - Box for track with transfo 48V-DC 60W - with 1 entry for round profile

Dimensions

↔ L250xB50xH50


Materials

Aluminium 1M | 2M

Ref	Price €
8531.1M	
8531.2M	

8532/.. - MYLA TRACK

IP20  

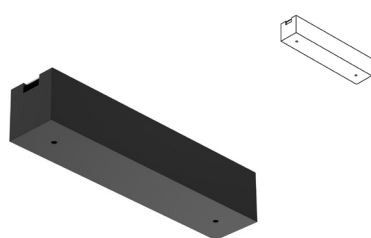

accessories for track systems - Box for track with transfo 48V-DC 60W - with 2 entries for square profile

Dimensions

↔ L250xB50xH50


Materials

Aluminium 1M | 2M

Ref	Price €
8532.1M	
8532.2M	

8533/.. - MYLA TRACK

IP20  

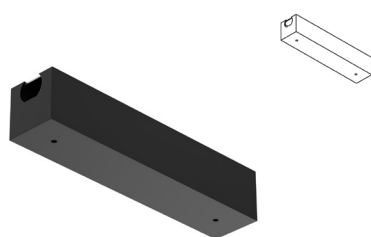

accessories for track systems - Box for track with transfo 48V-DC 60W - with 2 entries for round profile

Dimensions

↔ L250xB50xH50

Materials

Aluminium 1M | 2M

Ref	Price €
8533.1M	
8533.2M	



8584.2406/.. - MYLA CIGARO | DALI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - fixed

Lamptype

1x LED 410lm CRI90 max. 4W

350mA

Dimensions

Ø28xH135

35°

Materials

Aluminium

1M | 2M | 142 | 233

Aluminium / Messing

42 | 132 | 162

Aluminium / Roodkoper

282 | 562

Ref

8584.2406.1M

8584.2406.2M

8584.2406.42

8584.2406.233

8584.2406.562

8584.2406.132

8584.2406.142

8584.2406.162

8584.2406.282

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up

Other optics : 15° - 24° - 45° on demand

8584.3978/.. - MYLA JACOB | DALI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI90

Lamptype

1x LED 410lm CRI90 max. 4W

350mA

Dimensions

Ø40xH130

48°

Head Ø40xH85

Materials

Aluminium

1M | 2M | 29 | 49

Ref

8584.3978.1M

8584.3978.2M

8584.3978.29

8584.3978.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

built-up

8584.3982/.. - MYLA JACOB | DALI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W

500mA

Dimensions

L153xB40xH125

48°

Head Ø40xH85

Materials

Aluminium

1M | 2M | 29 | 49

Ref

8584.3982.1M

8584.3982.2M

8584.3982.29

8584.3982.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

built-up

8584.3974.300/.. - MYLA JACOB | DALI ADAPTOR

48V-DC



IP20



built-up spot with adaptor - round - directional - CRI90

Lamptype

1x LED 555lm CRI90 max. 5,8W

500mA

Dimensions

Ø40xH345

48°

Head Ø40xH300

Materials

Aluminium

1M | 2M | 29 | 49

Ref

8584.3974.300.1M

8584.3974.300.2M

8584.3974.300.29

8584.3974.300.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

built-up


MYLA TRACK | 8501 - 8502 - 8503

MYLA IN TRACK | 8509 - 8510 - 8511

MYLA O TRACK | 8551 - 8552 - 8553

Adaptor article

8584 | DALI adaptor
Spot

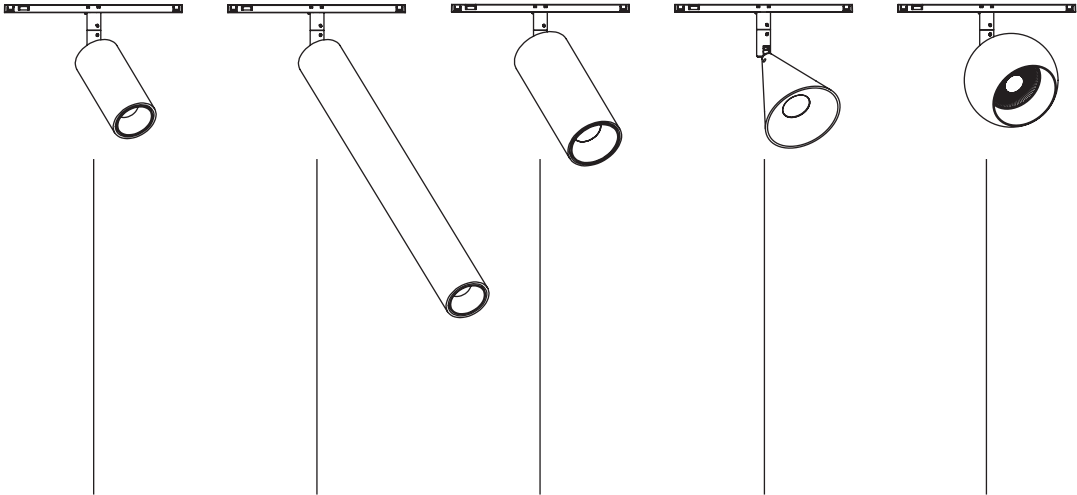

FAMILY

JACOB

JACOB

JACOB XL


SUZETTE

BABETTE


Spot article	3978	3982	3974.300	3800	2740	3117
Current	350mA	500mA	500mA	500mA	500mA	500mA
Flux	410lm	555lm	555lm	690lm	690lm	965lm
Output	4W	5.8W	5.8W	6.2W	6.2W	6.6W
CRI	90	90	90	97	97	80
Beam load/spot	48°	48°	48°	40°	40°	38°

LOADING SCHEME


track	distance (mm)	max load (kg)
8501	a: 900	5
8502	a: 1900	1
	b: 950	7
8503	b: 1450	3
	c: 966	9

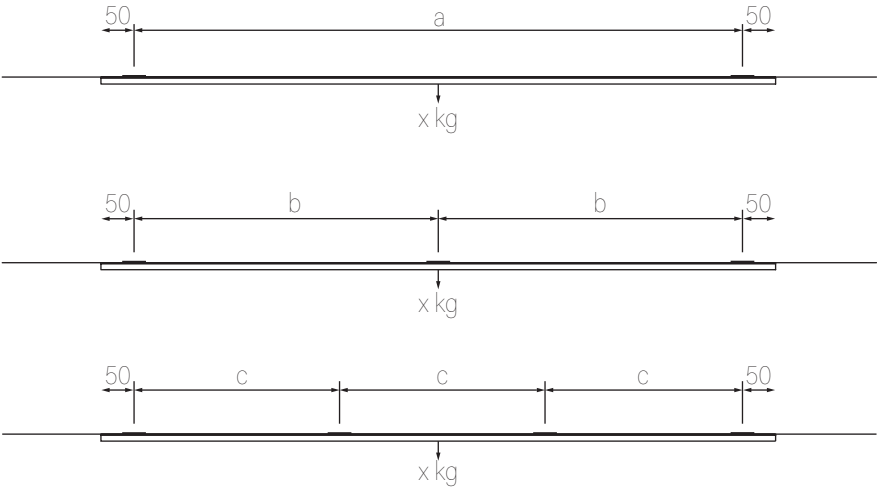

Adaptor article
8585 | DALI adaptor
Pendel

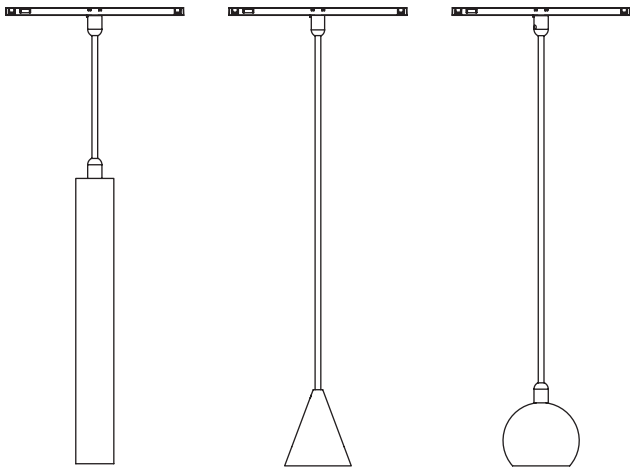

JACOB	SUZETTE	BABETTE
3973.300	2741	3118
500mA	500mA	500mA
555lm	690lm	965lm
5.8W	6.2W	6.6W
90	97	80
48°	40°	38°
250g	230g	235g



8612.D.250MA
8612.D.350MA
8612.D.500MA
8612.D.700MA


MYLA ADAPTOR 48V | DALI
max load: 0.5kg

CEILING UP

TRACK

8584.3800/.. - MYLA JACOB XL | DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø50xH156

40°

Head Ø50xH120

Materials

Aluminium

1M | 2M | 29 | 49


Ref Price €

8584.3800.1M	NW WW
8584.3800.2M	NW WW
8584.3800.29	NW WW
8584.3800.49	NW WW

built-up

8584.3605/.. - MYLA FLAVIE | DALI ADAPTOR

48V-DC



built-up spot with adaptor - square - directional

Lamptype

1x LED 555lm CRI90 max. 5,8W

500mA

Dimensions

L40xB40xH95

48°

Head Ø40xH95

Materials

Aluminium

1M | 2M | 14 | 47 | 77 | 119 | 230 | 127

Messing

16 | 23 | 13M


Ref Price €

8584.3605.1M	NW WW
8584.3605.2M	NW WW
8584.3605.14	NW WW
8584.3605.16	NW WW
8584.3605.23	NW WW
8584.3605.77	NW WW
8584.3605.47	NW WW
8584.3605.119	NW WW
8584.3605.13M	NW WW
8584.3605.230	NW WW
8584.3605.127	NW WW

built-up

8584.2740/.. - MYLA SUZETTE | DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional - CRI97

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø80xH109

30°

Materials

Aluminium

1M | 2M


Ref Price €

8584.2740.1M	NW WW
8584.2740.2M	NW WW

built-up

8584.3117/.. - MYLA BABETTE | DALI ADAPTOR

48V-DC



built-up spot with adaptor - round - directional

Lamptype

1x LED 965lm CRI80 max. 6,6W

500mA

Dimensions

Ø80xH109

28°

Materials

Aluminium

1M | 2M | 29 | 49

Messing

16

Ref Price €

8584.3117.1M	NW WW
8584.3117.2M	NW WW
8584.3117.16	NW WW
8584.3117.29	NW WW
8584.3117.49	NW WW

built-up



CEILING UP

TRACK



INDOOR | Ceiling UP | TRACK | MYLA

8584.3973.300/.. - MYLA JACOB | DALI ADAPTOR

48V-DC



suspension with adaptor - round - with fixed rod

Lamptype

1x LED 639lm CRI80 max. 5,6W

500mA

Dimensions

Ø40xH300

Tige 600

48°

Materials

Aluminium

1M | 2M | 29 | 49

Messing

Ref

8584.3973.300.1M

8584.3973.300.2M

8584.3973.300.16

8584.3973.300.29

8584.3973.300.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up

Please state the exact length of the rod when ordering
CRI 90 on request

8584.3600.300/.. - MYLA FLAVIE | DALI ADAPTOR

48V-DC



suspension with adaptor - square - with fixed rod

Lamptype

1x LED 555lm CRI90 max. 5,8W

500mA

Dimensions

L40xB40xH300

Tige 600

48°

Materials

Aluminium

1M | 2M | 29 | 47 | 77 | 49 | 127

Messing

Ref

8584.3600.300.1M

8584.3600.300.2M

8584.3600.300.16

8584.3600.300.29

8584.3600.300.77

8584.3600.300.47

8584.3600.300.49

8584.3600.300.127

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up

CRI 90 on request

8584.2741/.. - MYLA SUZETTE | DALI ADAPTOR

48V-DC



suspension with adaptor - with fixed rod

Lamptype

1x LED 690lm CRI97 max. 6,2W

500mA

Dimensions

Ø70xH80

Tige 800

30°

Materials

Aluminium

1M | 2M

Ref

8584.2741.1M

8584.2741.2M

Price €

NW | WW

NW | WW

built-up

Please state the exact length of the rod when ordering

8584.3118/.. - MYLA BABETTE | DALI ADAPTOR

48V-DC



suspension with adaptor - round - with fixed rod

Lamptype

1x LED 965lm CRI80 max. 6,6W

500mA

Dimensions

Ø80xH109

Tige 800

28°

Materials

Aluminium

1M | 2M | 29 | 49

Messing

Ref

8584.3118.1M

8584.3118.2M

8584.3118.16

8584.3118.29

8584.3118.49

Price €

NW | WW

NW | WW

NW | WW

NW | WW

NW | WW

built-up

Please state the exact length of the rod when ordering



INDOOR | Ceiling UP | TRACK | MYLA

8614.48V.XIM/.. - MYLA ADAPTOR 48V XIM		=48V-DC		IP20			
		adapter - with retaining collar M6x1	Ref		Price €		
	Dimensions		8614.48V.XIM.1				
	 L 113,6xB8xH9		8614.48V.XIM.2				
	Materials						
	Polyamide		1 2				

built-up
max. 500g - enkel 48V - max. 90W



8612.D.250MA/.. - MYLA ADAPTOR 48V | DALI

=48V-DC



IP20



adapter - with retaining collar M6x1

Dimensions

L113,6xB8xH

Materials

Polyamide

1 | 2

Ref

8612.D.250MA.1

8612.D.250MA.2

Price €*built-up*
max. 500g - 250mA - max. 12W**8612.D.350MA/.. - MYLA ADAPTOR 48V | DALI**

=48V-DC



IP20



adapter - with retaining collar M6x1

Dimensions

L113,6xB8xH

Materials

Polyamide

1 | 2

Ref

8612.D.350MA.1

8612.D.350MA.2

Price €*built-up*
max. 500g - 350mA - max. 16,5W**8612.D.500MA/.. - MYLA ADAPTOR 48V | DALI**

=48V-DC



IP20



adapter - with retaining collar M6x1

Dimensions

L113,6xB11xH8

Materials

Polyamide

1 | 2

Ref

8612.D.500MA.1

8612.D.500MA.2

Price €*built-up*
max. 500g - 500mA - max. 24W**8612.D.700MA/.. - MYLA ADAPTOR 48V | DALI**

=48V-DC



IP20



adapter - with retaining collar M6x1

Dimensions

L113,6xB8xH

Materials

Polyamide

1 | 2


Ref

8612.D.700MA.1

8612.D.700MA.2

Price €*built-up*
max. 500g - 700mA - max. 33W

8550/.. - MYLA TRACK



hand tools - Cutting tool for track conductors

Ref

Price €

8550



built-up



Verkrijgbare kleuren RAIL kleuren - Available TRACK - RAIL colours



Verkrijgbare kleuren spots of pendels - Available colours spots or pendants



CEILING UP

TRACK





psmlighting
Delighted to help you

Groendreef 60, 9880 Aalter | T +32 9 374 19 51 | www.psmlighting.be

All our products are locally made in Aalter, Belgium (EU). Short delivery times.